



# Lenovo ThinkPad T500 Screen Replacement

This guide will teach you how to replace the screen on your ThinkPad T500.


Written By: Brian Egana



 **TOOLS:**

- **Phillips #0 Screwdriver** (1)
- **Spudger** (1)

## Step 1 — Screen

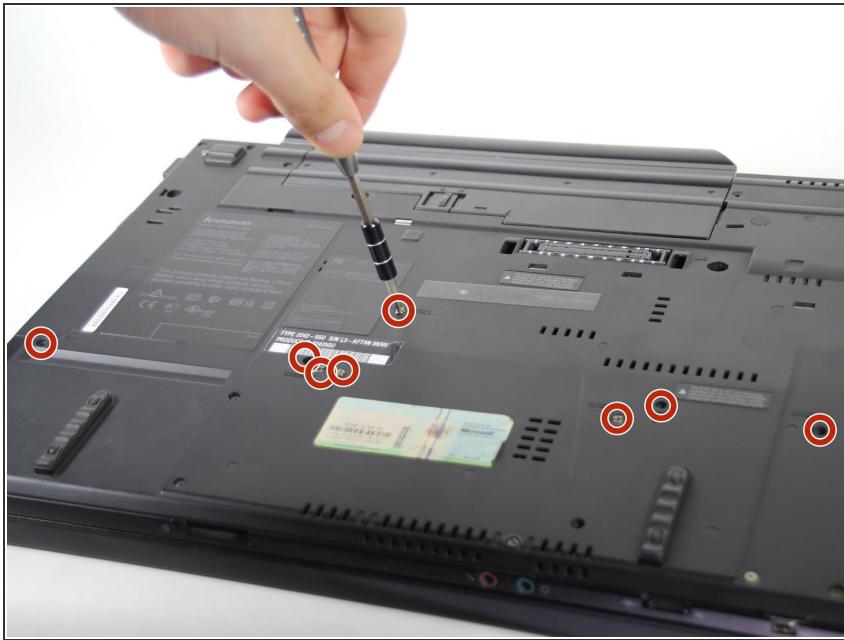

- Remove the eight 14mm screws using the Phillips #0 Screwdriver.


## Step 2



- Lift the palm rest panel up.

 Be sure to lift the panel **slowly**; there is a ribbon cable attached to the bottom.

## Step 3

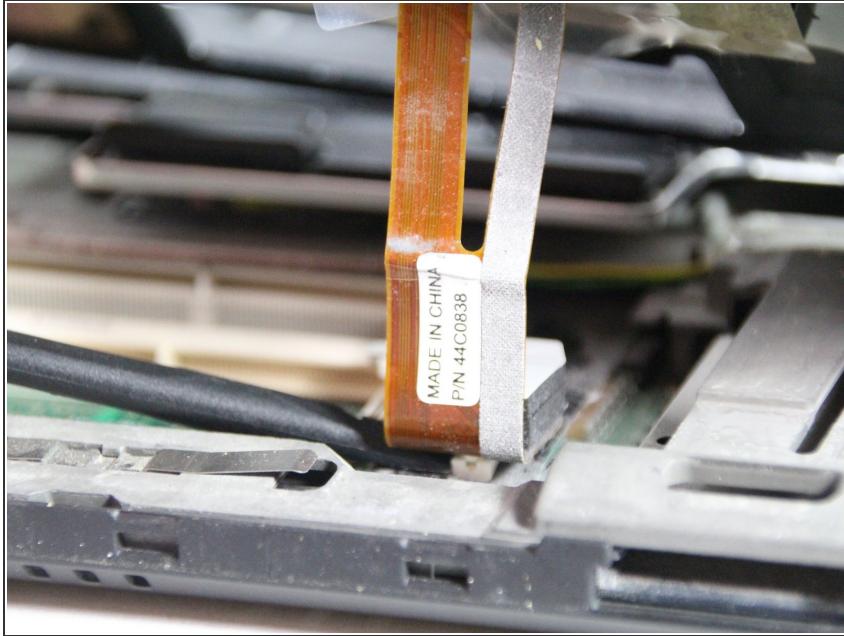

- Use the spudger to disconnect the ribbon cable.


## Step 4



- With the panel disconnected, lift the keyboard.


**⚠** As with the panel, lift the keyboard **slowly**; there is a ribbon cable attached to the bottom.

## Step 5

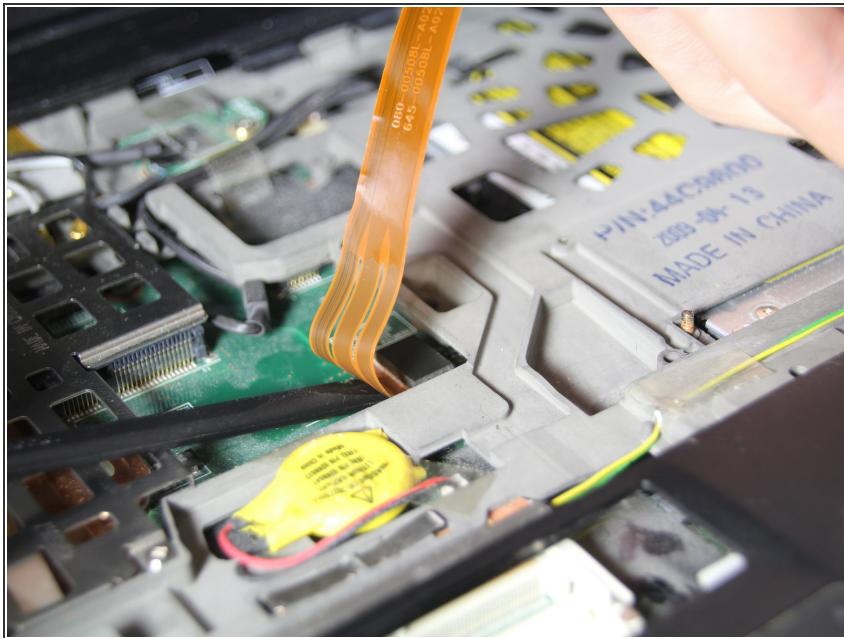

- Disconnect the ribbon cable with the spudger.

## Step 6

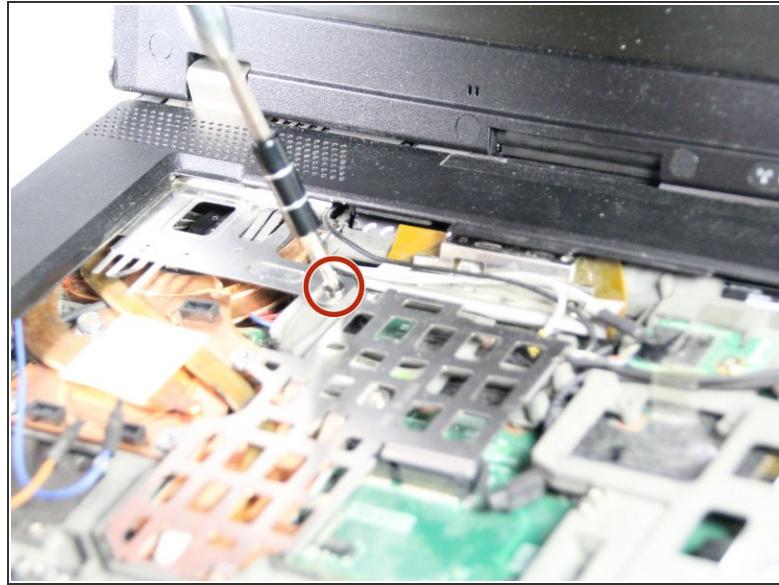

- Remove the keyboard and the panel.
- Using the Phillips #0 Screwdriver, remove the three 3 mm screws that are at the bottom sides and near the top-left of the speaker cover.
- Disconnect the orange and blue cables next to the left side of the speaker cover.

This document was generated on 2019-09-18 05:32:42 AM (MST).

## Step 7




- Remove the speaker cover.

## Step 8




- Remove the two 3mm screws on the left speaker with the Phillips #0 Screwdriver.

## Step 9

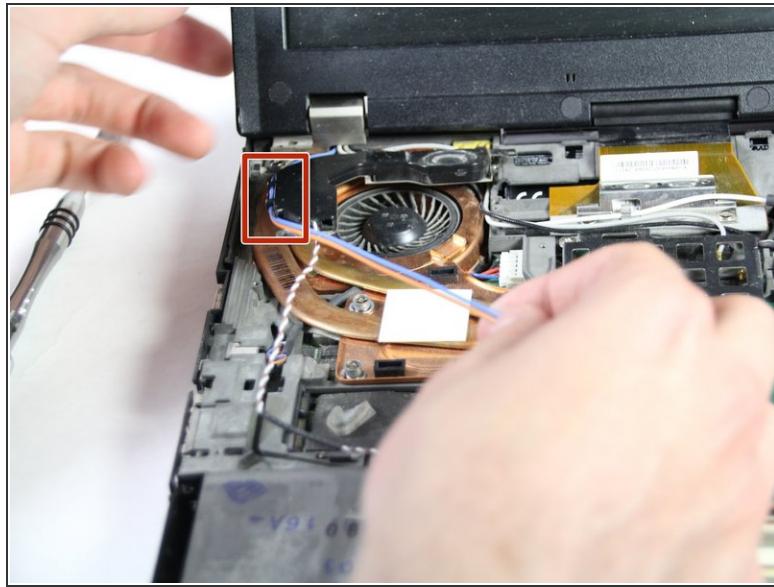


- Detach the blue and orange cables from the left speaker's clamps.

## Step 10

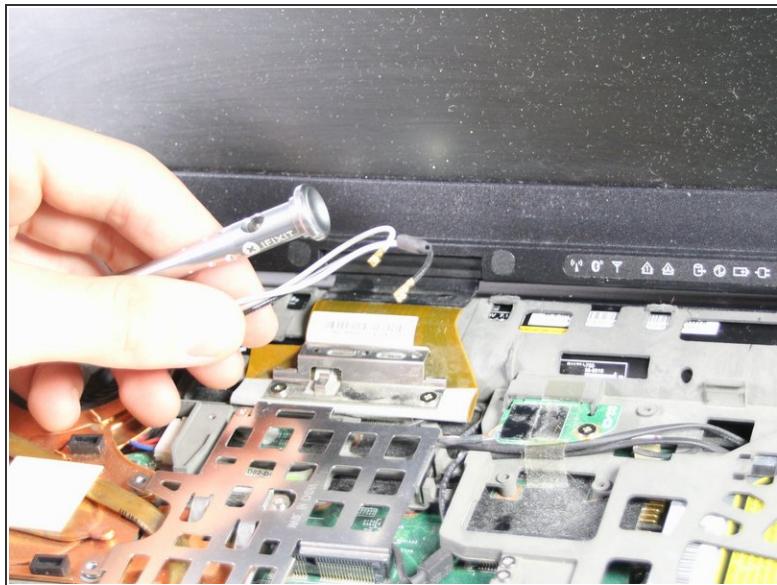

- Using the Phillips #0 Screwdriver, lift the metal fastener up and remove the black and white wires.

## Step 11

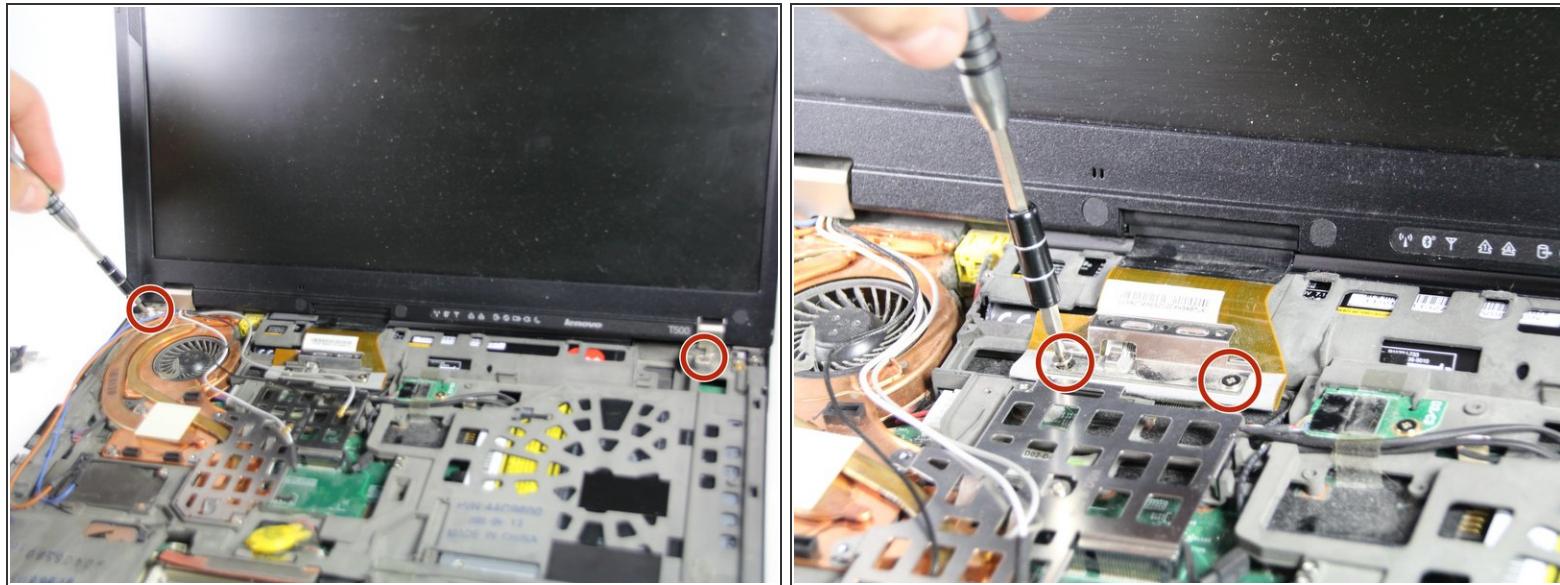

- Remove the two 3mm screws next to the lid hinges, as well as the two 3mm screws on the lid's ribbon cable.

## Step 12



- Use the spudger to detach the screen's ribbon cable.

## Step 13



- Remove the screen.

To reassemble your device, follow these instructions in reverse order.