



# Lenovo Vibe Z2 Pro Backplate Disassembly

We will show you how to remove the backplate on the Lenovo Vibe Z2 Pro.

Written By: Bryan Sepulveda




## INTRODUCTION

Learn how to access the phone interior in this crucial backplate disassembly guide

### TOOLS:

- [Metal Spudger \(1\)](#)
- [T4 Torx Screwdriver \(1\)](#)

## Step 1 — Lenovo Vibe Z2 Pro Backplate Disassembly

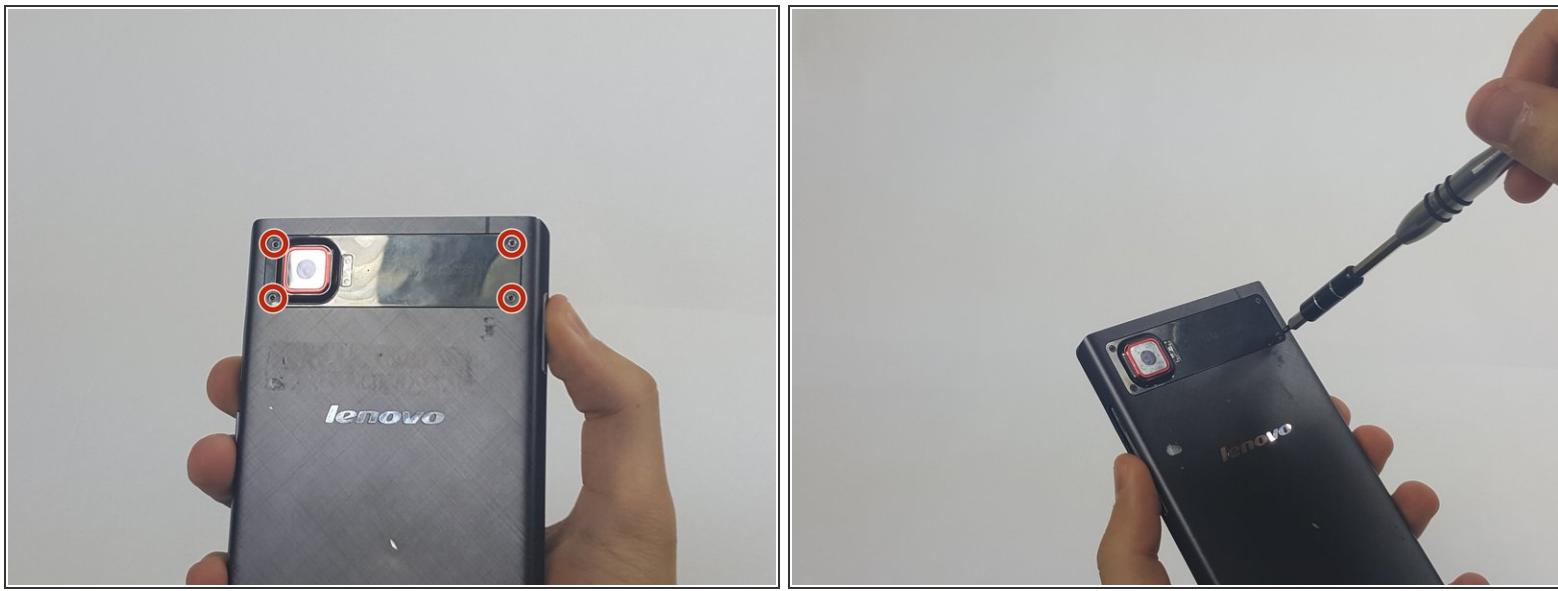


- Remove the 4.9 mm torx head screws located on the camera plate on the back of the phone

## Step 2




- Remove the 3.65 mm Torx head screws at the bottom of the phone.

## Step 3

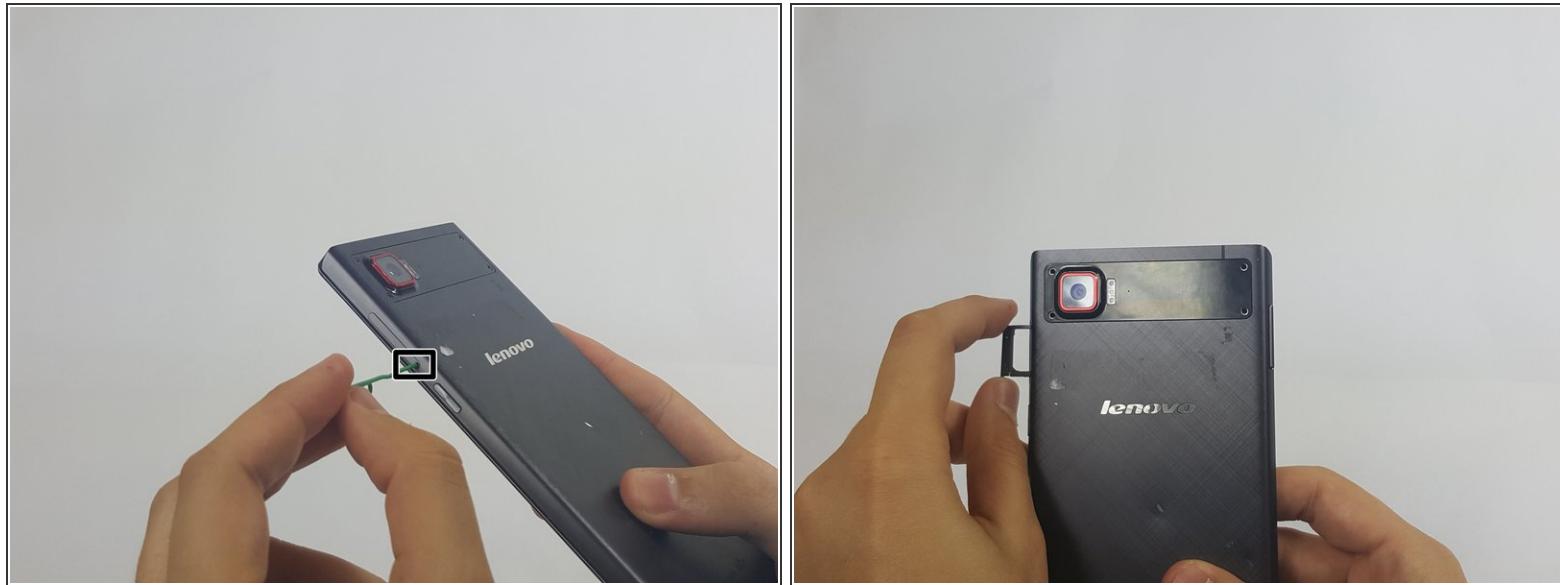

- Remove the SIM card tray by pushing a pin into the hole on the side of the phone.

## Step 4

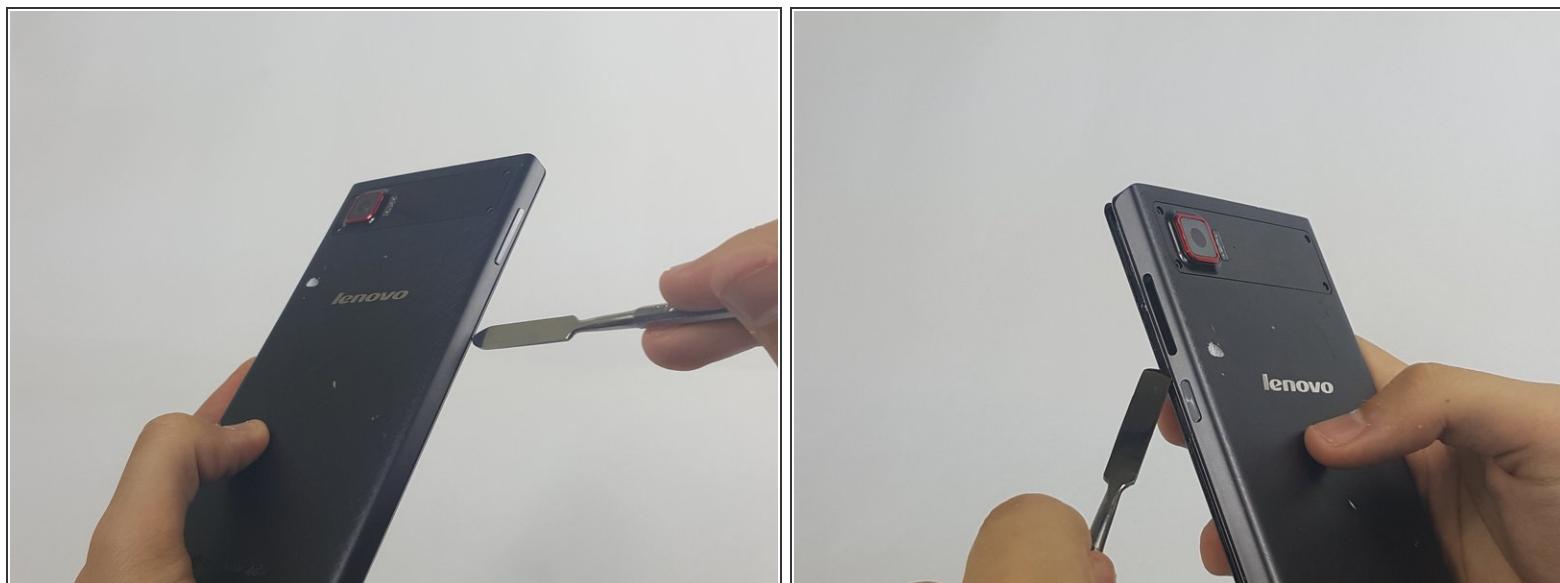

- Push the Spudger along the gap between the phone and the backplate to separate them.

## Step 5



- Carefully pull the backplate away from the phone.

To reassemble your device, follow these instructions in reverse order.