



# Lenovo Yoga 2 11" Battery Replacement

This guide will show you how to safely remove and replace a faulty battery.

Written By: Abbey Hickmann




## INTRODUCTION

As time passes, a battery loses its capability to hold a single charge. This guide will aide users in removing the back panel to reach and replace the faulty battery. Remember to turn the laptop off prior to the repair.

### TOOLS:

- [T5 Torx Screwdriver](#) (1)
- [Magnetic Project Mat](#) (1)
- [Phillips #00 Screwdriver](#) (1)
- [Tweezers](#) (1)

## Step 1 — Back Panel

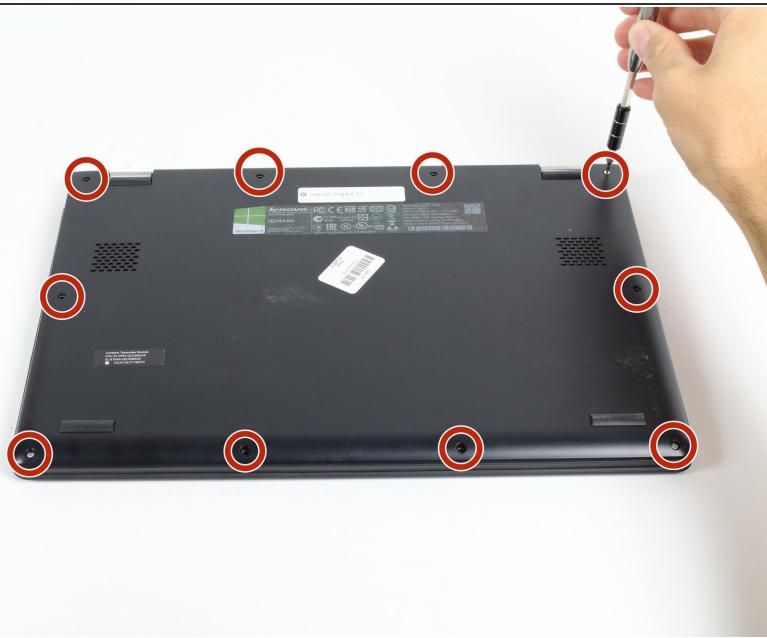

- With a T5 Torx screwdriver, remove ten 6.35 mm screws from the back of the laptop.

## Step 2




- Carefully separate back panel from laptop.

## Step 3 — Battery





- Once you have completed the prerequisite guide, locate the battery of the laptop. Remember to disconnect the battery.

## Step 4

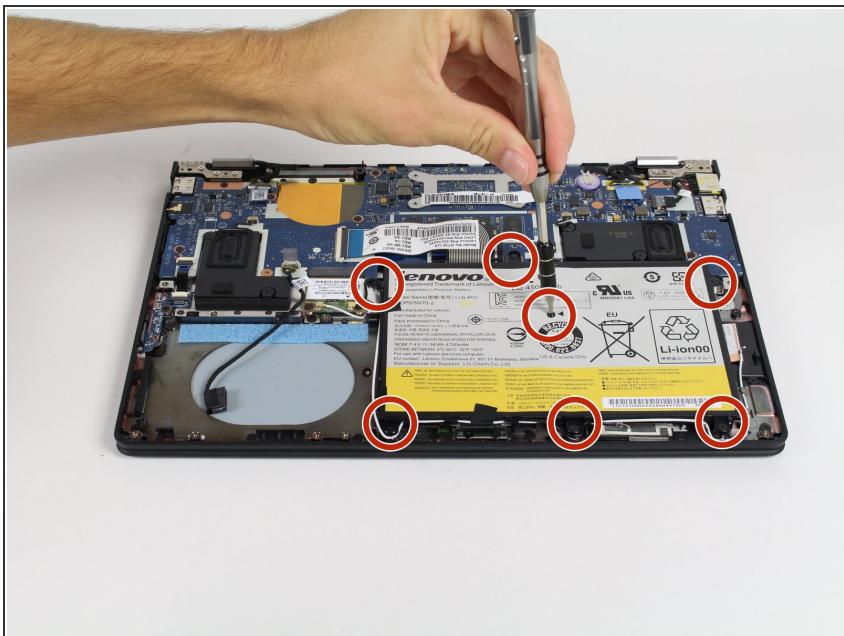

- Using a #00 Philips Precision Screwdriver, remove the seven 3.175mm screws that hold the battery in place (six on the outside, one in the middle).

## Step 5

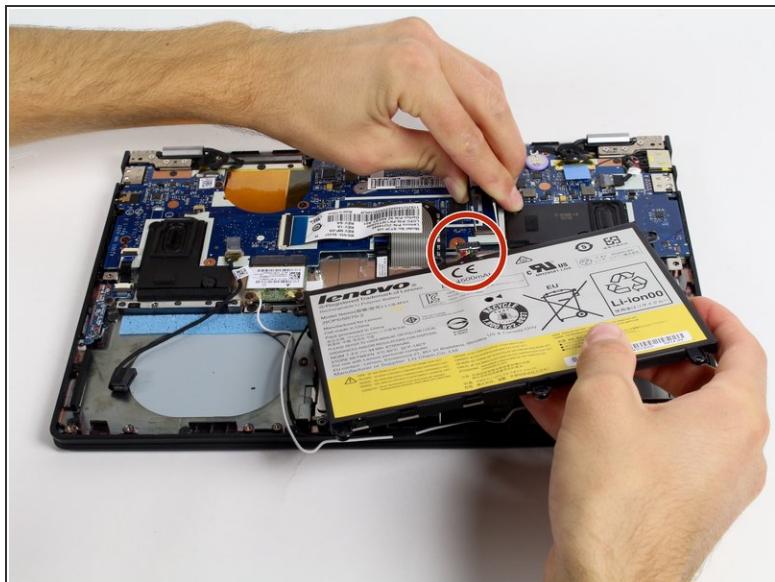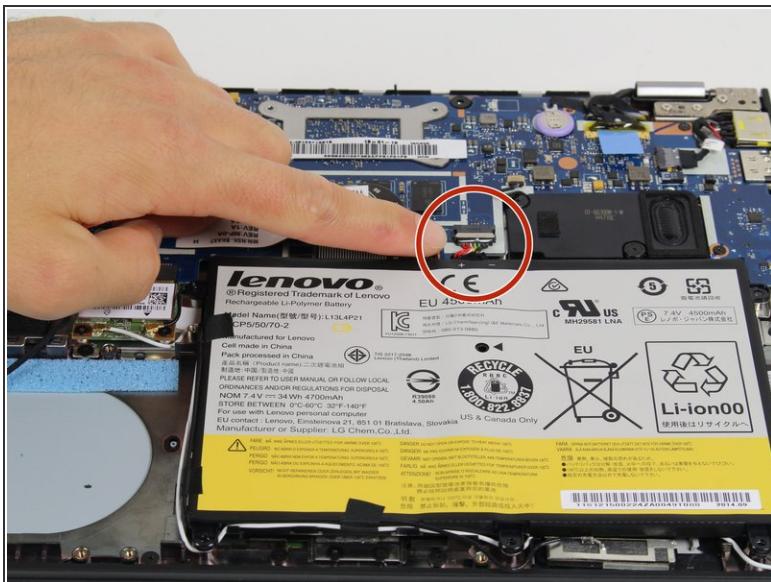

- There will be a clip that connects the battery to the rest of the laptop. Unclasp this clip by inserting tweezers into the connection to completely free the battery.

## Step 6



- Once all of the wires are detached, carefully remove the battery and replace.

To reassemble your device, follow these instructions in reverse order.