Lenovo Yoga Tablet 2 830-F Camera Replacement

Step by step camera replacement guide for the Lenovo Yoga Tablet 2 830-F

Written By: Mario Gjyli
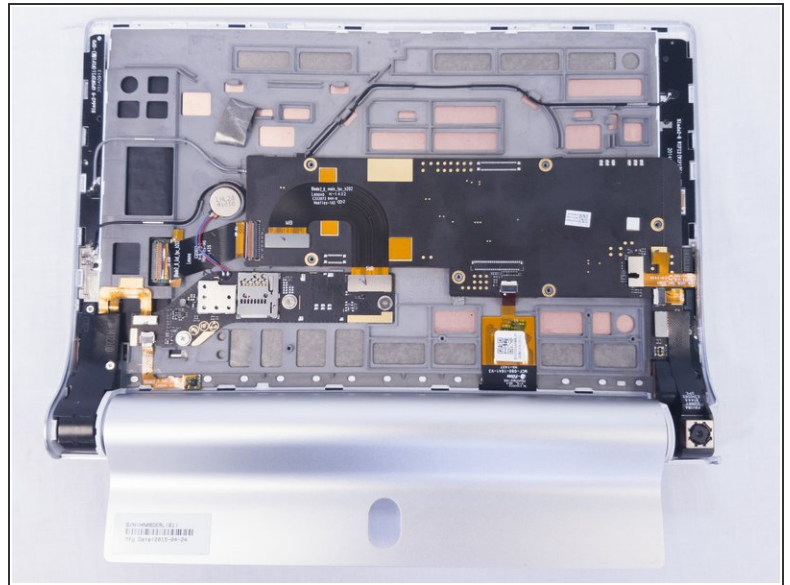
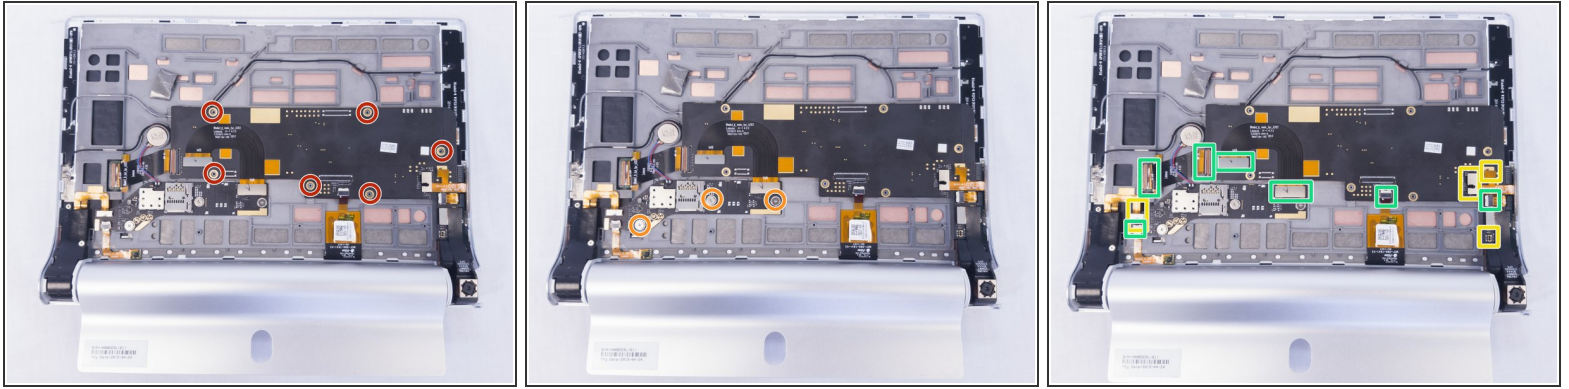## 🔧 TOOLS:

- Type #00 Phillips head screwdriver (1)
- Spudger (1)
- iFixit Opening Tools (1)

This document was generated on 2019-09-19 02:28:48 PM (MST).
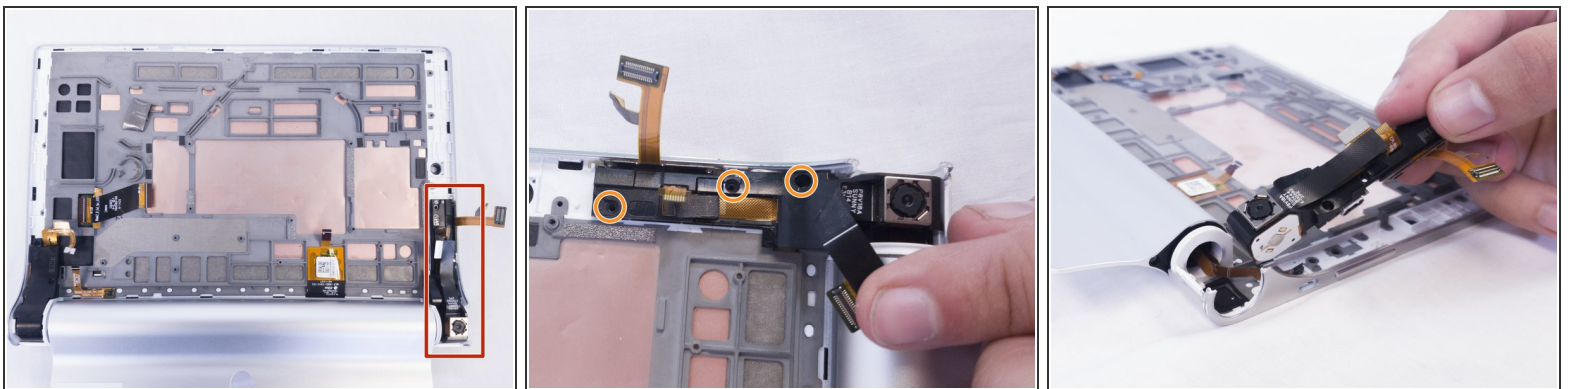
www.iFixit.com

Step 1 — Camera

- Remove the three screws on the back of the device with the Phillips Screwdriver #00 bit.

- Using the blue opening tools or spudger, gently remove the back cover to expose the interior of the tablet.

Step 2

- Using the Phillips Screwdriver #00 bit remove the 6 screws.

- Using the Phillips Screwdriver #00 bit remove the 3 screws.

- After removing all the screws, disconnect the ribbon cables.

- Disconnect the ZIF connectors.

⚠ Some of the ribbon cables are secured with clips, simply pry up the clips before sliding them out of the pin connectors.

Step 3

- After removing the motherboard and antennas the camera module is located on the right as marked in red.

- Remove the three 2mm screws holding the module in place with the Phillips Screwdriver #00 bit.

⚠ The camera module is also held in place with adhesive so gently remove.

To reassemble your device, follow these instructions in reverse order.