




# Logitech Harmony Smart Keyboard Back Panel

This guide will show you how to open your keyboard to replace internal components.

Written By: Hayley Nichols

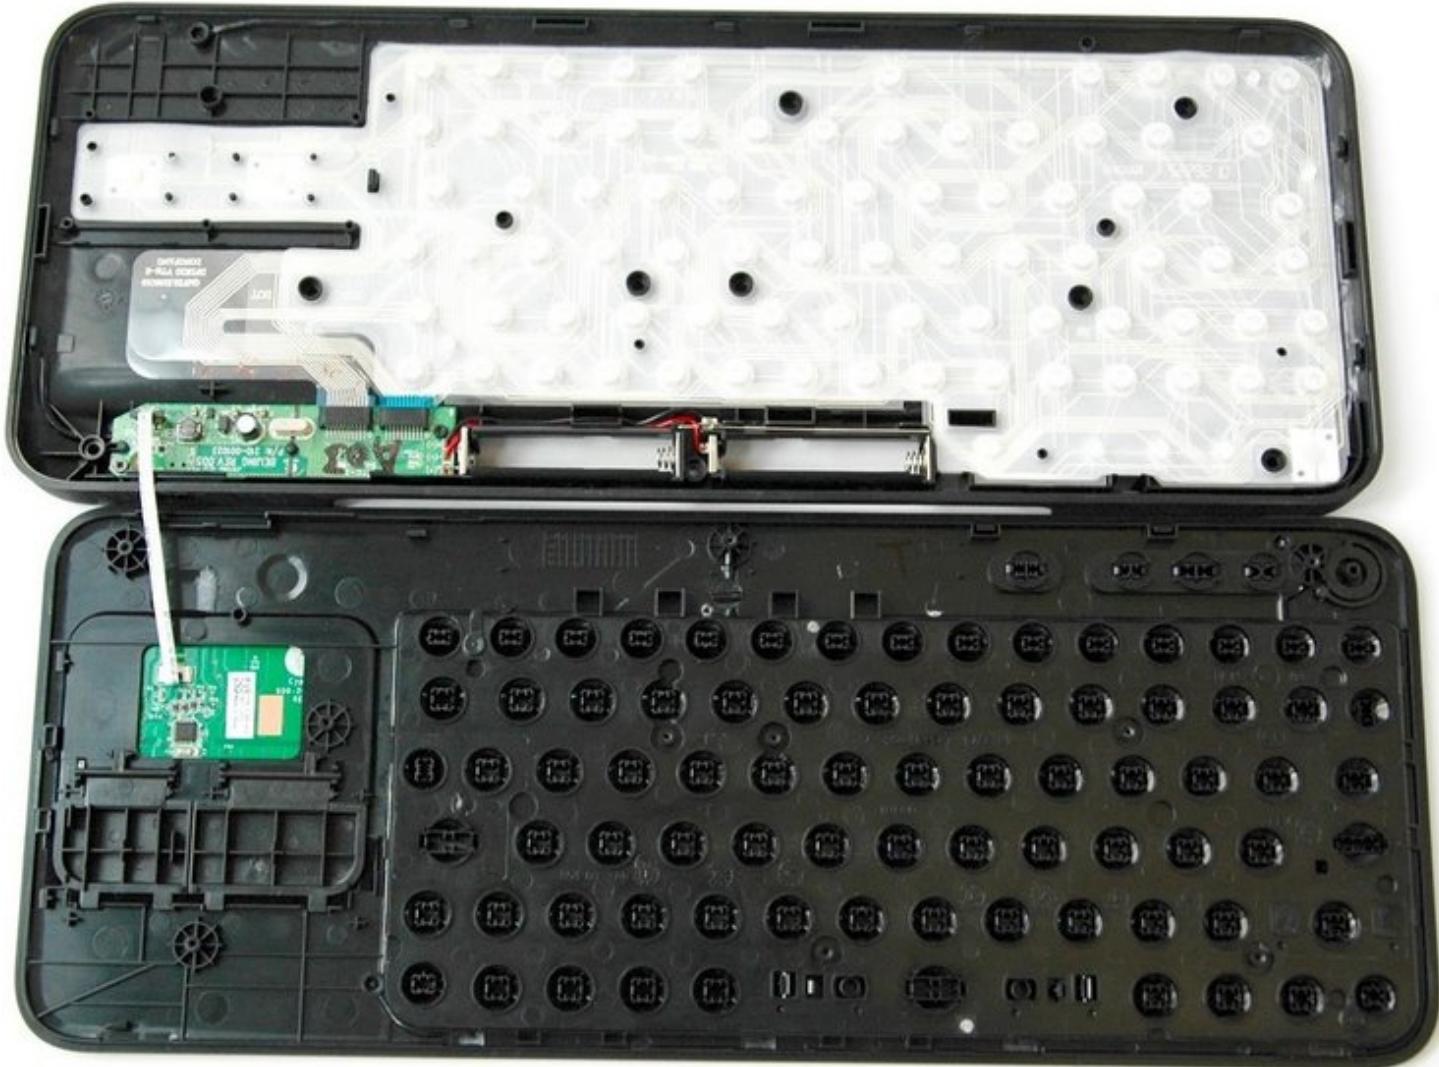

## INTRODUCTION

This is a prerequisite guide that will instruct you on how to properly open your keyboard. This will be helpful for replacing internal components without damaging your device.

### TOOLS:

- Spudger (1)
- Phillips #1 Screwdriver (1)

## Step 1 — Back Panel



- Turn keyboard over to the backside.

## Step 2



- Press and slide up on the upper battery latch, using both thumbs.

## Step 3



- Remove the two AA batteries and set them aside.

## Step 4




- Unscrew all five 4.0 mm screws, using Phillips #1 screwdriver.

## Step 5



- Peel off the center sticker to reveal two hidden 4.0 mm screws.
- Unscrew these two screws with a Phillips #1 screwdriver.

## Step 6

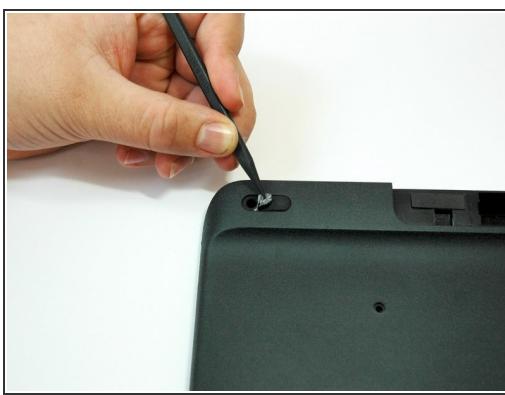

- Lift both top left and top right rubber stickers halfway, using the sharp end of the plastic spudger.
- Unscrew a total of two 4.0 mm screws, under the rubber stickers, using a Phillips #1 screwdriver.

## Step 7



- Unscrew the top center 4.0 mm screw, in the battery compartment, using the Phillips #1 screwdriver.


*(i)* Now, you should have a total of ten 4.0 mm screws set aside.

## Step 8



- Wedge the flat end of the spudger between the back panel and front panel.
- Slide the flat end of the spudger from right to left to pry the two panels apart.

## Step 9

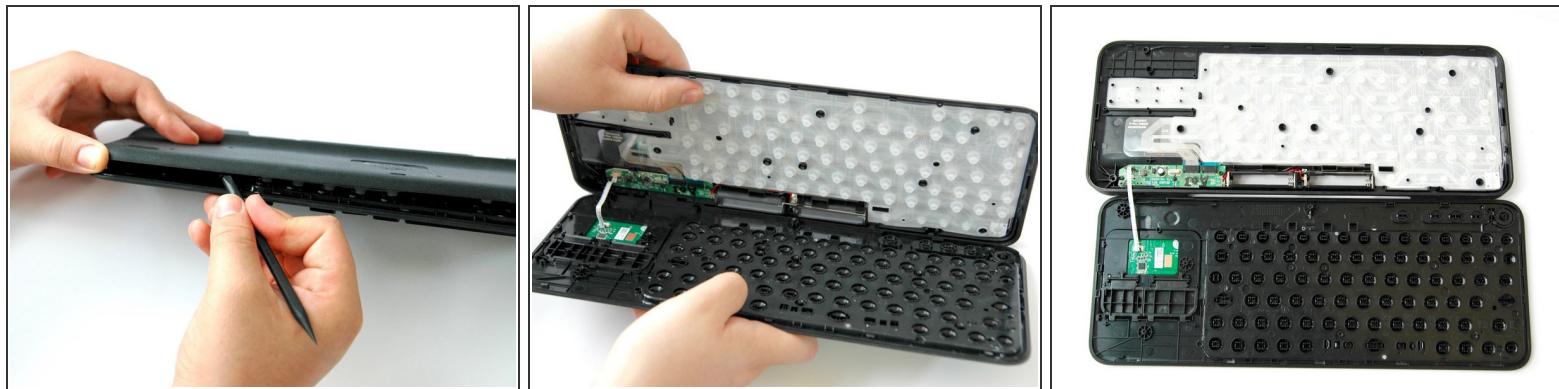

- Separate the back panel from the front panel completely, using both hands.
- ⓘ A white ribbon flex cable will remain connected to both panels.
- ⚠ Pull the panels apart slowly and gently, or the white ribbon flex cable may be unsafely removed.

To reassemble your device, follow these instructions in reverse order.