



# Logitech K750 Keyboard Disassembly

Remove the keyboard for internal cleaning something deeper than outside

Written By: Miguel Cretu



## INTRODUCTION

I teach half-disassemble the keyboard for a somewhat deeper cleaning

### TOOLS:



- New Item (1)

## Step 1 — Logitech K750 Keyboard Disassembly





- Remove the battery / battery as described in the previous tutorial. Basically prying with a flat screwdriver and carefully

## Step 2

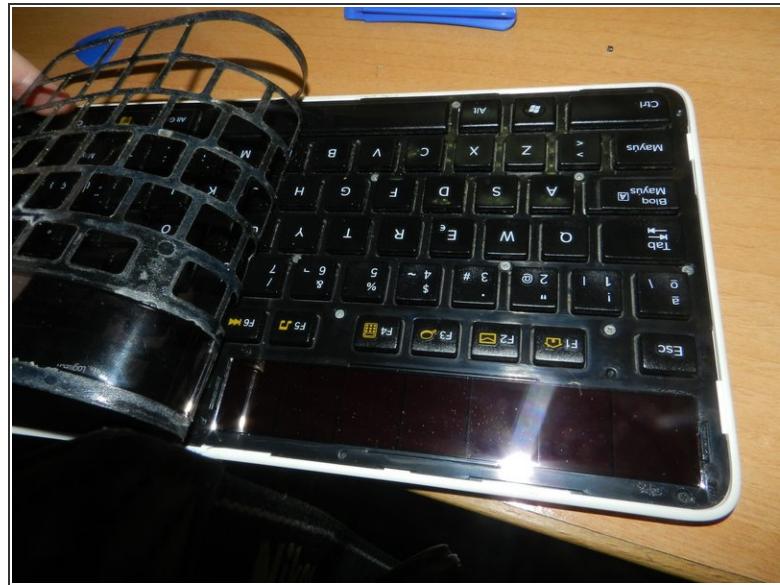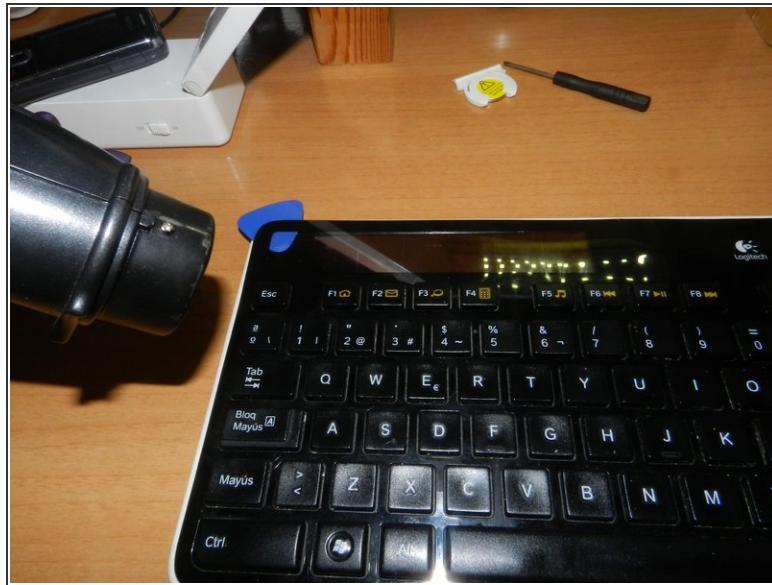


- With a hairdryer, heat the "plastic" and pull it little by little with your hand so as not to break it.
- Note: Some marking may appear on the plastic if it is pulled incorrectly.

## Step 3

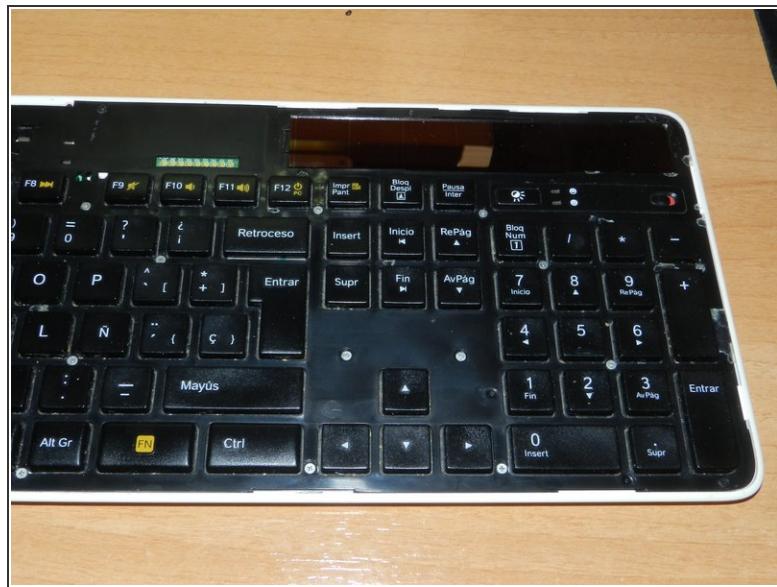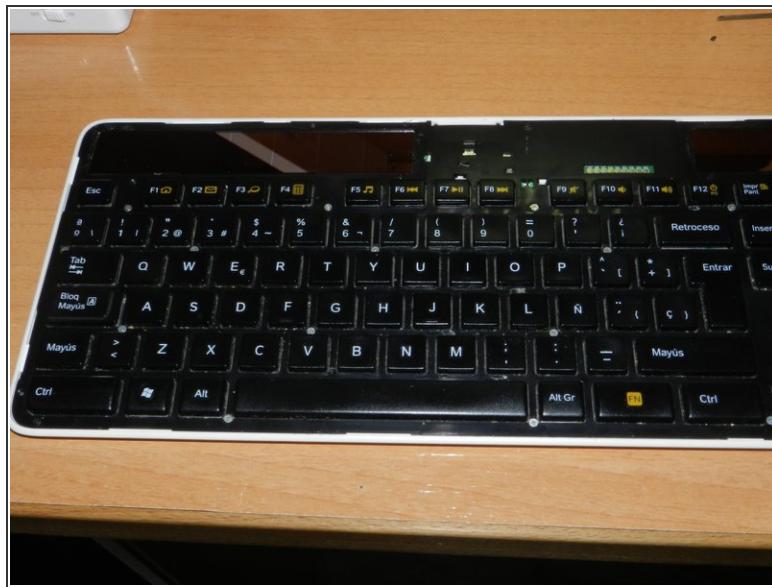

- Once the plastic was out, we access the screws.

## Step 4

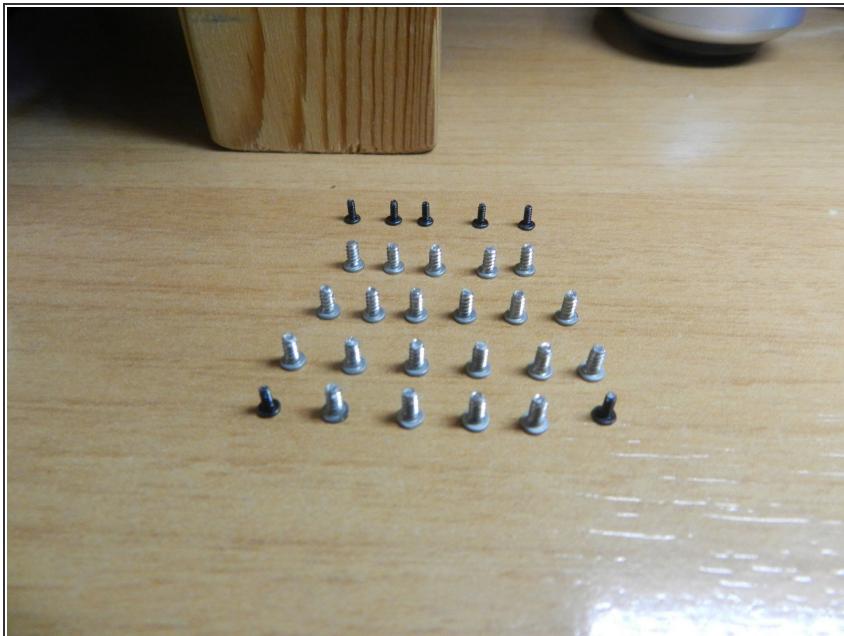

- Unscrew the 28 self-tapping "PHILLIPS" screws. I have the habit of placing them in the same order that I take them out so as not to make mistakes when I return.

## Step 5



- Carefully pry the tabs around the body of the keyboard. Between the keys F8 and F9 there is another tab. To open it, lift a little from below and pry with the screwdriver as if screwing or unscrewing.

## Step 6



- With the steps above we would have the middle keyboard disassembled. To reassemble it, follow the same steps in reverse. Careful with the plastic, the first time I hit a little off center and I had to take it off again and paste it, to center it well.

To reassemble your device, follow these instructions in reverse order.