



Lubricate General Electric Telephone 2-9710A Power Dial

Lubricate power dial component on base logic board.

Written By: Norberto Sanchez



INTRODUCTION

This guide will show how to lubricate the power dial. Your power dial will operate smooth after completing this guide.

TOOLS:

- Lubricant (1)
- Phillips #1 Screwdriver (1)
- iFixit Opening Tools (1)


Step 1 — Phone Cord



⚠ Unplug the device before proceeding.

- Using a plastic opening tool, remove the phone cord from the phone jack from the base of the headset.

Step 2

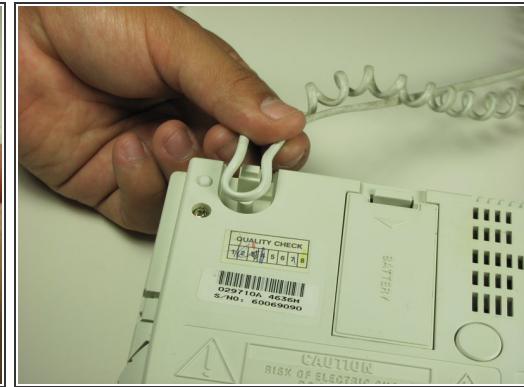

- Remove the phone cord screw cap.
 - Unscrew the 7.5mm screw.
 - Remove the screw cap.
- Remove the cord from the phone base.

Step 3 — 9V Base Battery




- Use finger to remove the battery cover.

Step 4 — Base Shell



- Remove the Volume Dial by gently grasping the dial and pulling away from the base.

Step 5

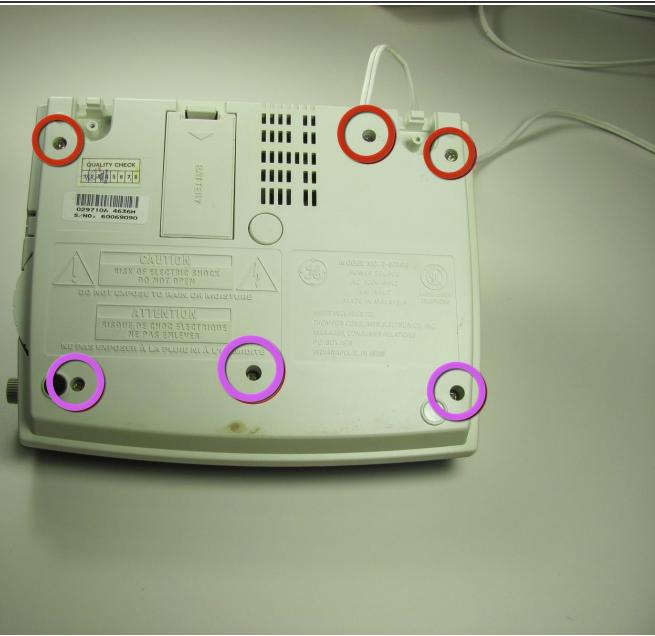


- Remove the 6 screws from the base shell.
- Remove the 3 12mm screws with the Philips head #1 screw driver.
- Remove the 3 18mm screws with the Philips head #1 screw driver.

Step 6



- Pry off the base shell using a Plastic Opener Tool.

Step 7 — Lubricate General Electric Telephone 2-9710A Power Dial

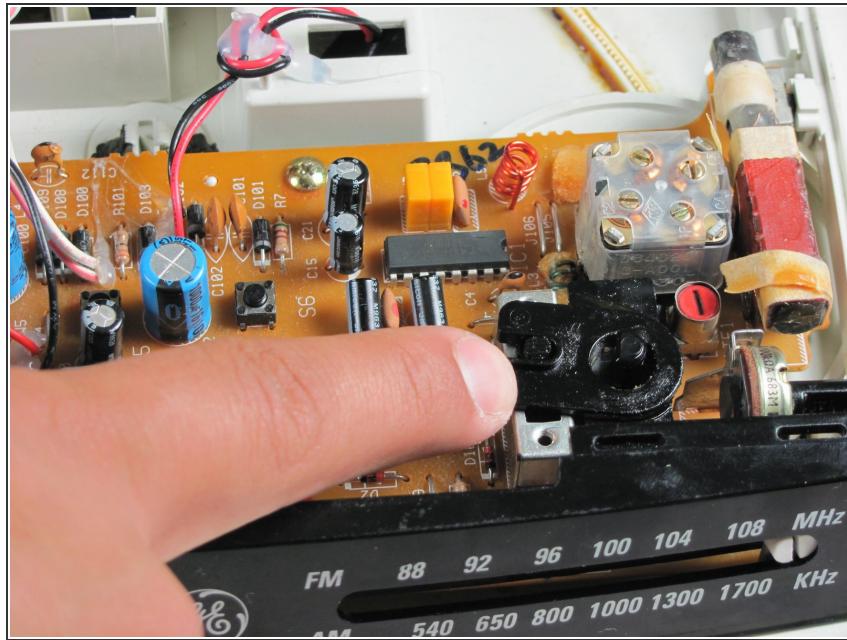

- Inside base shell on circuit board, lubricate power switch.

⚠ CAUTION: Make sure lubricant does not circuit board. This can damage the circuit board.

To reassemble your device, follow these instructions in reverse order.