




MSI GT62VR 6RD Dominator Speaker Replacement

This guide will show you how to remove the speaker inside the MSI GT62VR 6RD Dominator.

Written By: emmanuel adgebnro

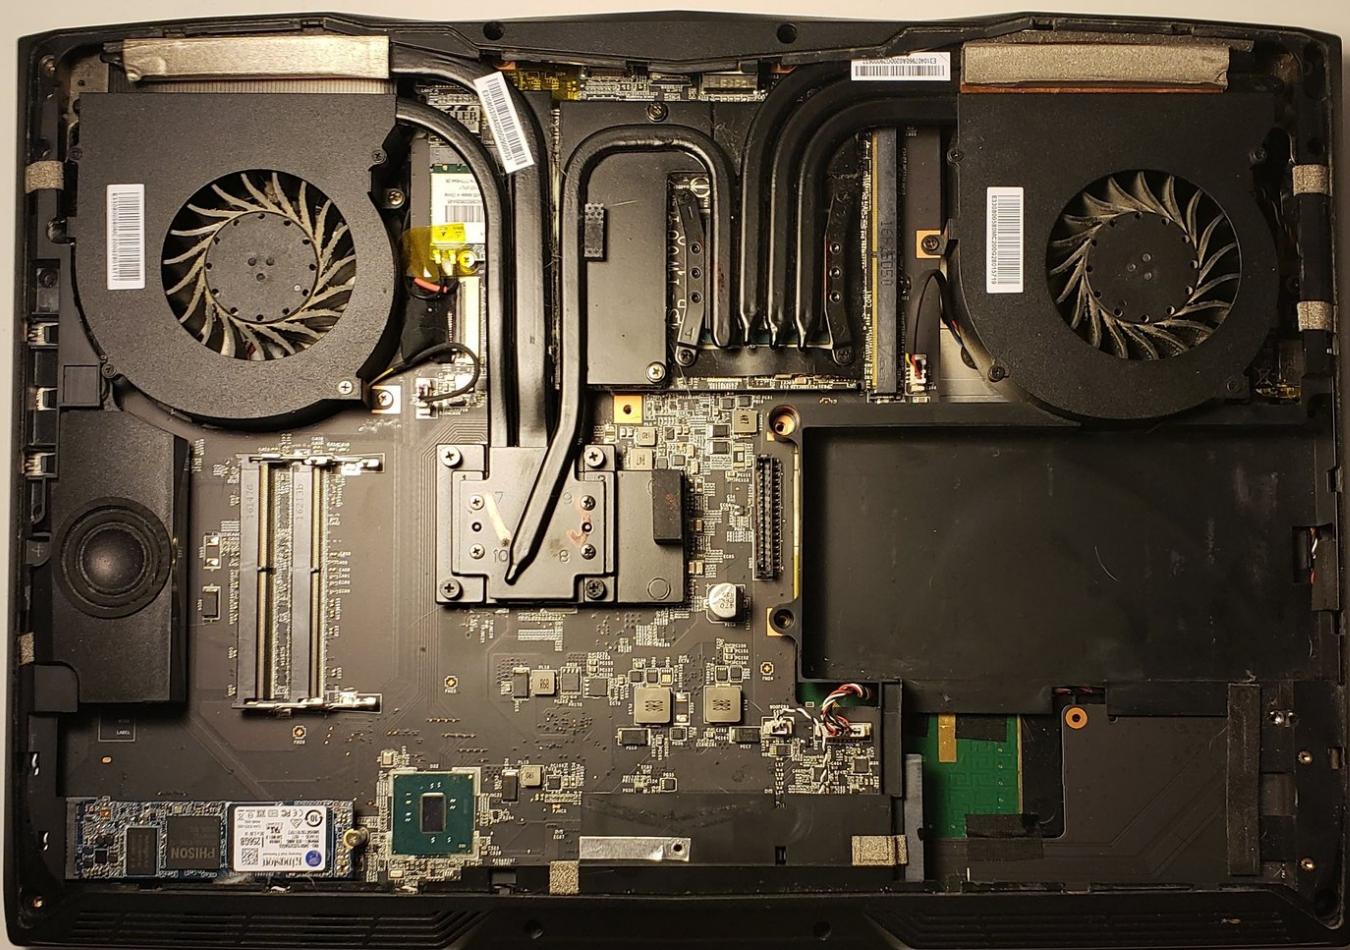

 **TOOLS:**



- [iFixit Opening Tools \(1\)](#)
- [JIS #0 Screwdriver \(1\)](#)

Step 1 — Battery




- Remove the 6 screws on the bottom plate of the laptop using a 1.2mm JIS #0 screwdriver.

Step 2

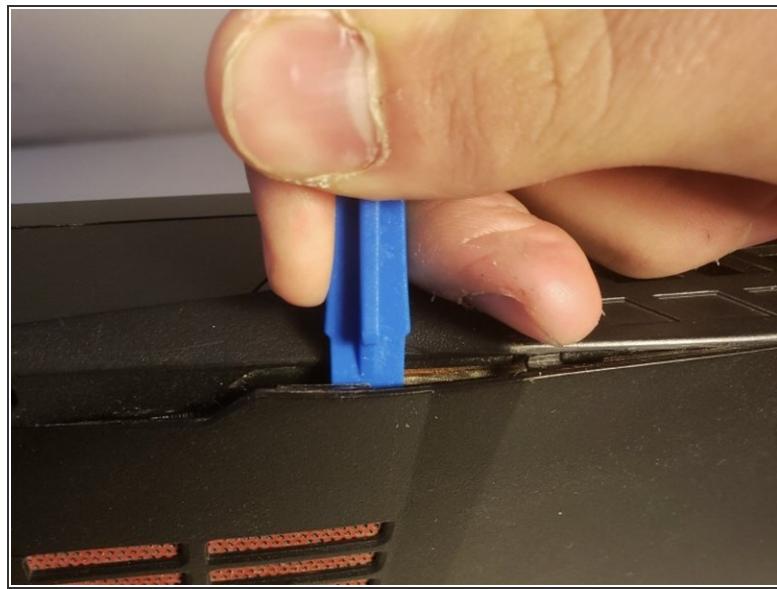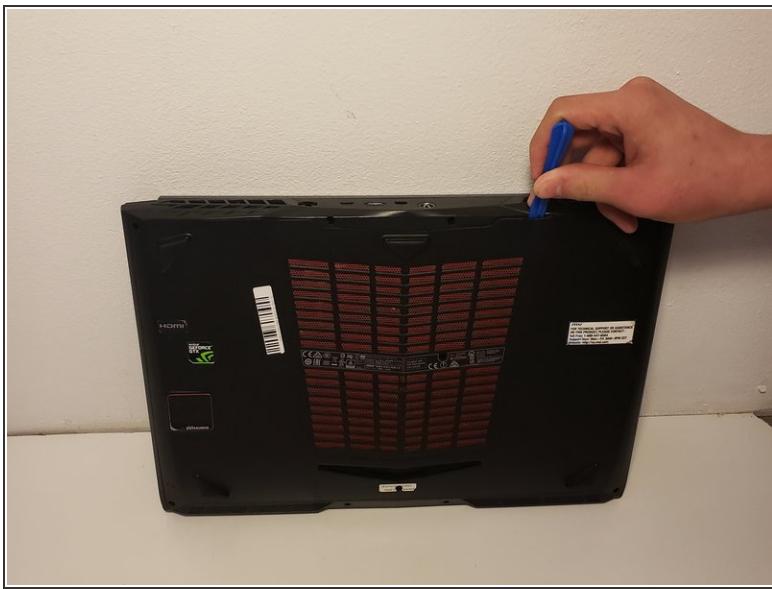


- Insert the plastic opening tool into the back plate of the laptop and lightly pry it up.
- ⚠ The laptop cover will break if it is being handled roughly.
- Slide the plastic opening tool around the laptop's edge gently, slowly popping off the clips securing it into the laptop.

Step 3

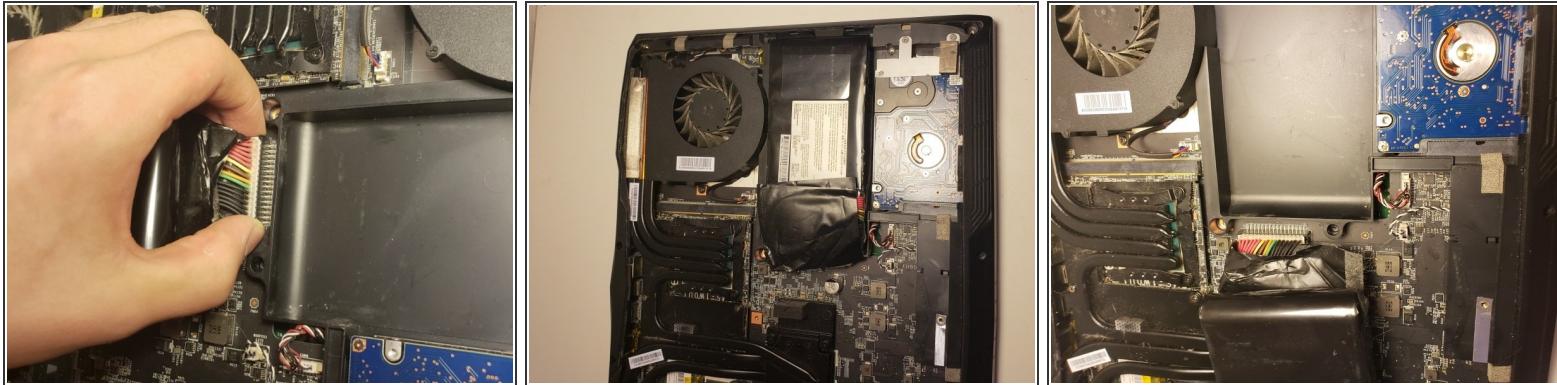



- Locate the battery.
- The wires are located at the back end of the battery.
- Place your hands at the corners of the wires.
- Pull upward from the back end of the battery where the wires are located.

Step 4 — Hard Drive

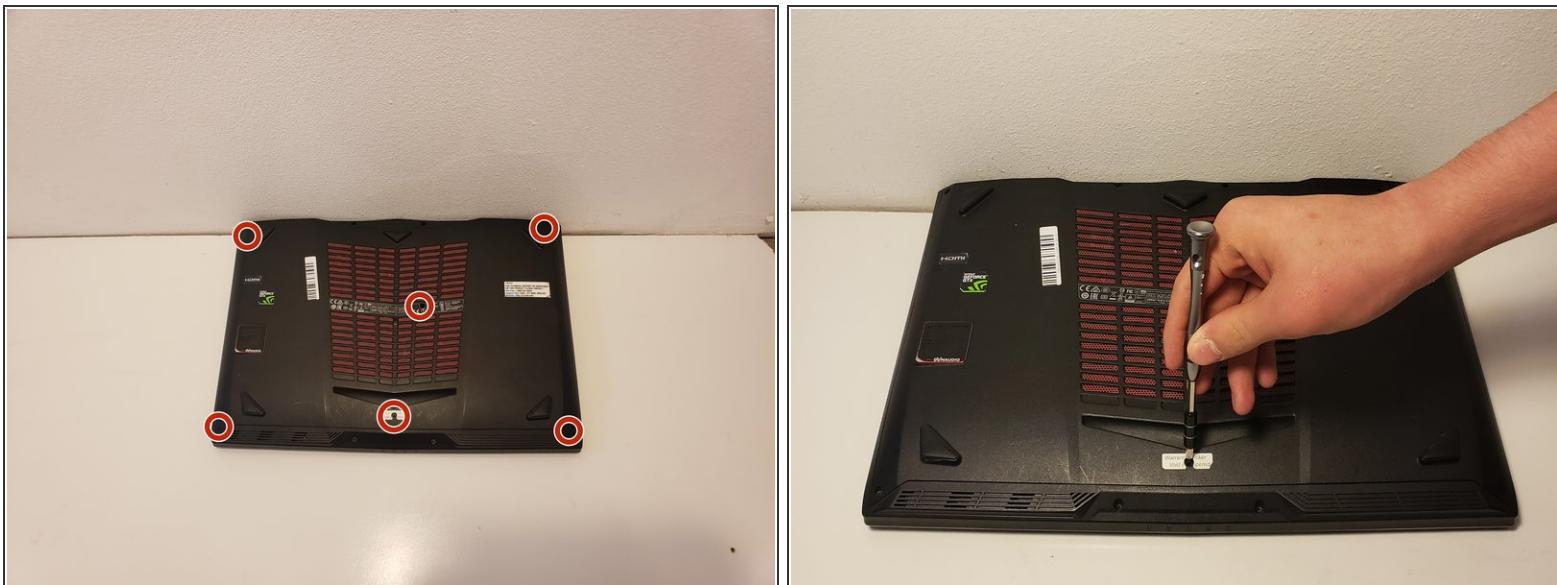



- Remove the six screws on the back plate of the laptop using a JIS #0 screwdriver.

Step 5

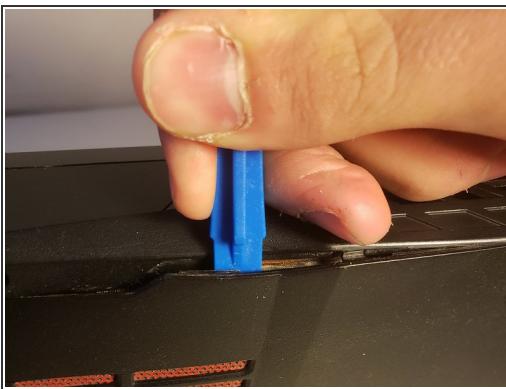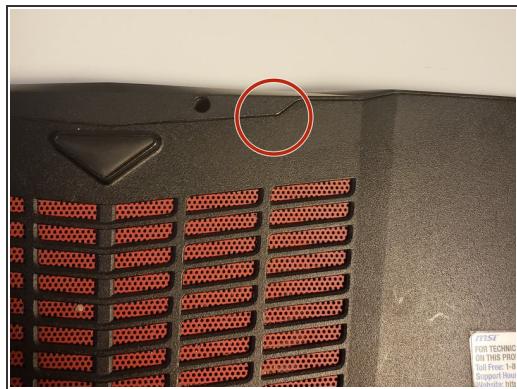



- Insert a plastic opening tool into the seam of the back cover
- Pry the cover up until clips release.
- Slide the plastic opening tool around the laptop until cover is fully removed.

Step 6

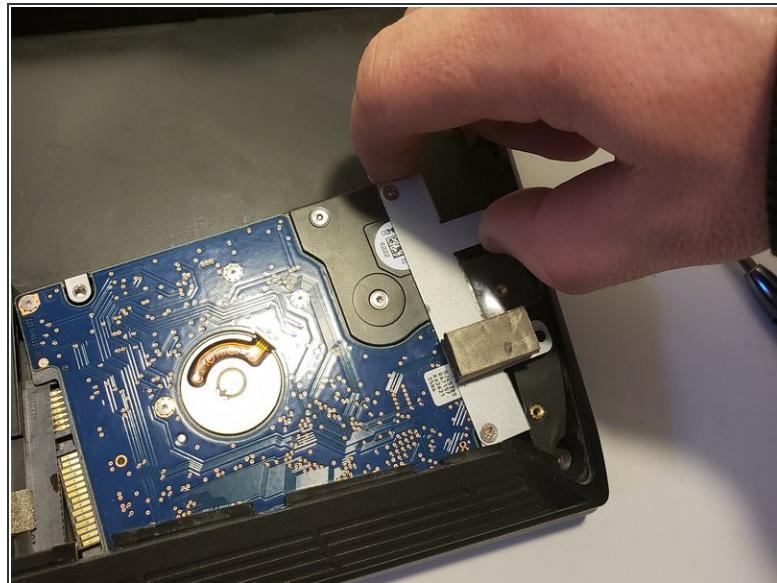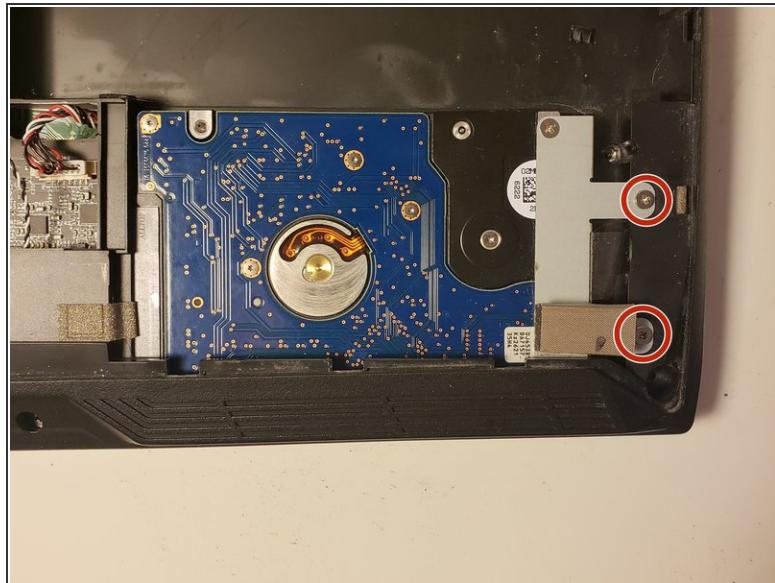



- Remove the two screws securing the hard drive to the laptop.
- Lightly lift the hard drive up by grasping the silver bracket that secures it to the laptop.
- Wiggle it backwards slowly until it is unplugged.
- Slide out from under the cover towards the battery.

Step 7 — Speaker

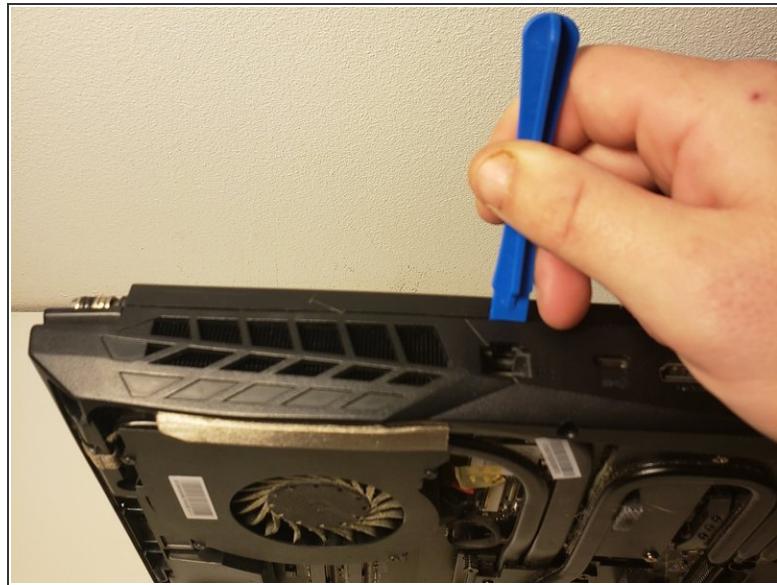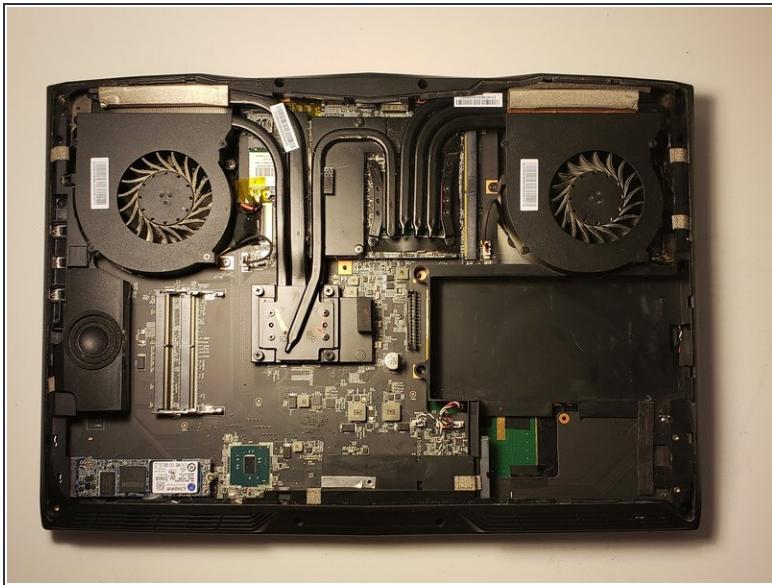


- Insert the plastic opening tool into the side of the laptop above the fan, and lightly pry it up.
- ⚠ The laptop will break if it is being handle roughly.
- Slide the plastic opening tool around the laptop's edge gently, while slowly popping off the clips securing it into the laptop.

Step 8

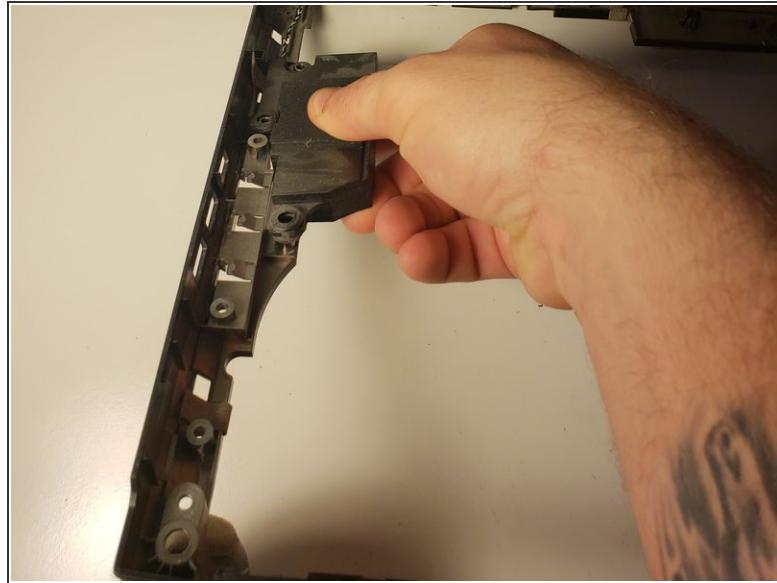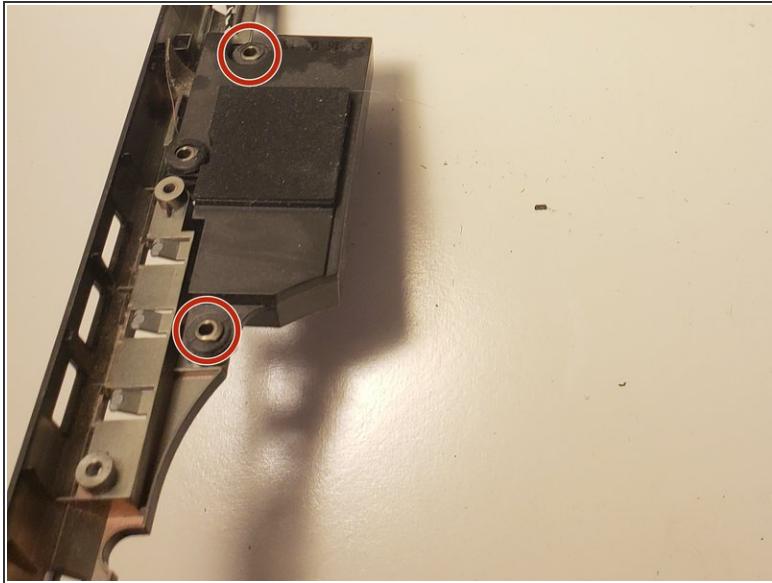

- Slowly pop off the clips securing the speaker to the laptop side frame.

Step 9

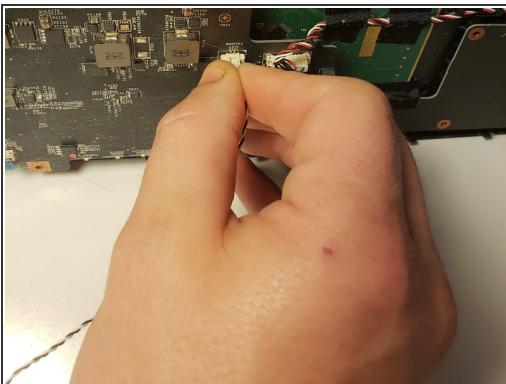

- Locate the speaker wires.
- The speaker wires are attached to the speaker. By running your hand across the speaker wires, you can find its location on the motherboard.
- Place your hands at the corners of the wires.
- Pull upward from the motherboard where the wires are located.

To reassemble your device, follow these instructions in reverse order.