



# MacBook Air 11" Mid 2013 Battery Replacement

Prereq for removing the battery with the fan out.

Written By: Walter Galan



## INTRODUCTION

Prereq for removing the battery with the fan out.

### TOOLS:


- T5 Torx Screwdriver (1)

## Step 1 — Battery



- Remove the following five screws securing the battery to the upper case:
  - Two 5.2 mm T5 Torx screws
  - One 6 mm T5 Torx screw
  - Two 2.6 mm T5 Torx screws

## Step 2

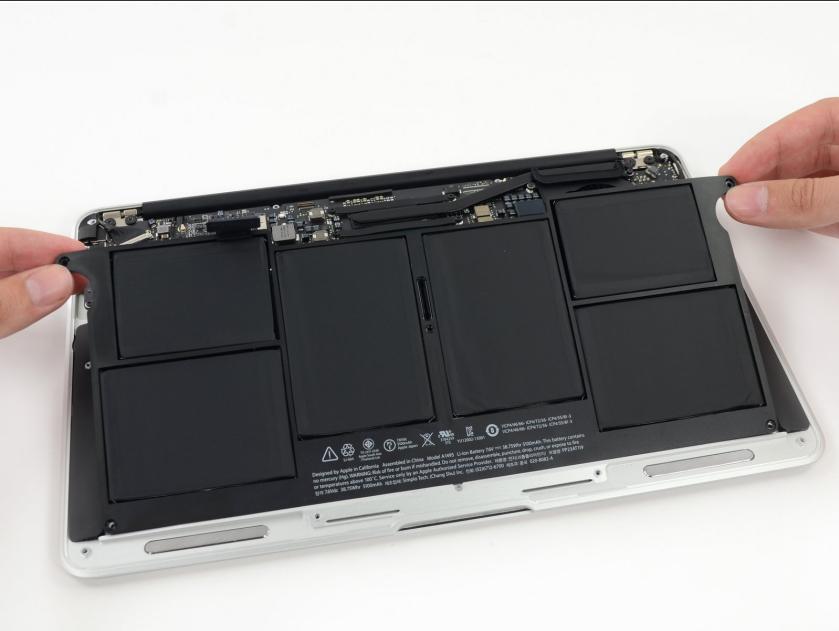

 When handling the battery, avoid squeezing or touching the six exposed lithium polymer cells.

- Lift the battery from its edge nearest the logic board and remove it from the upper case.

To reassemble your device, follow these instructions in reverse order.