




# MacBook Air 13" Late 2010 Battery Replacement

Prerequisite. Removing battery when fan is out.

Written By: Andrew Bookholt

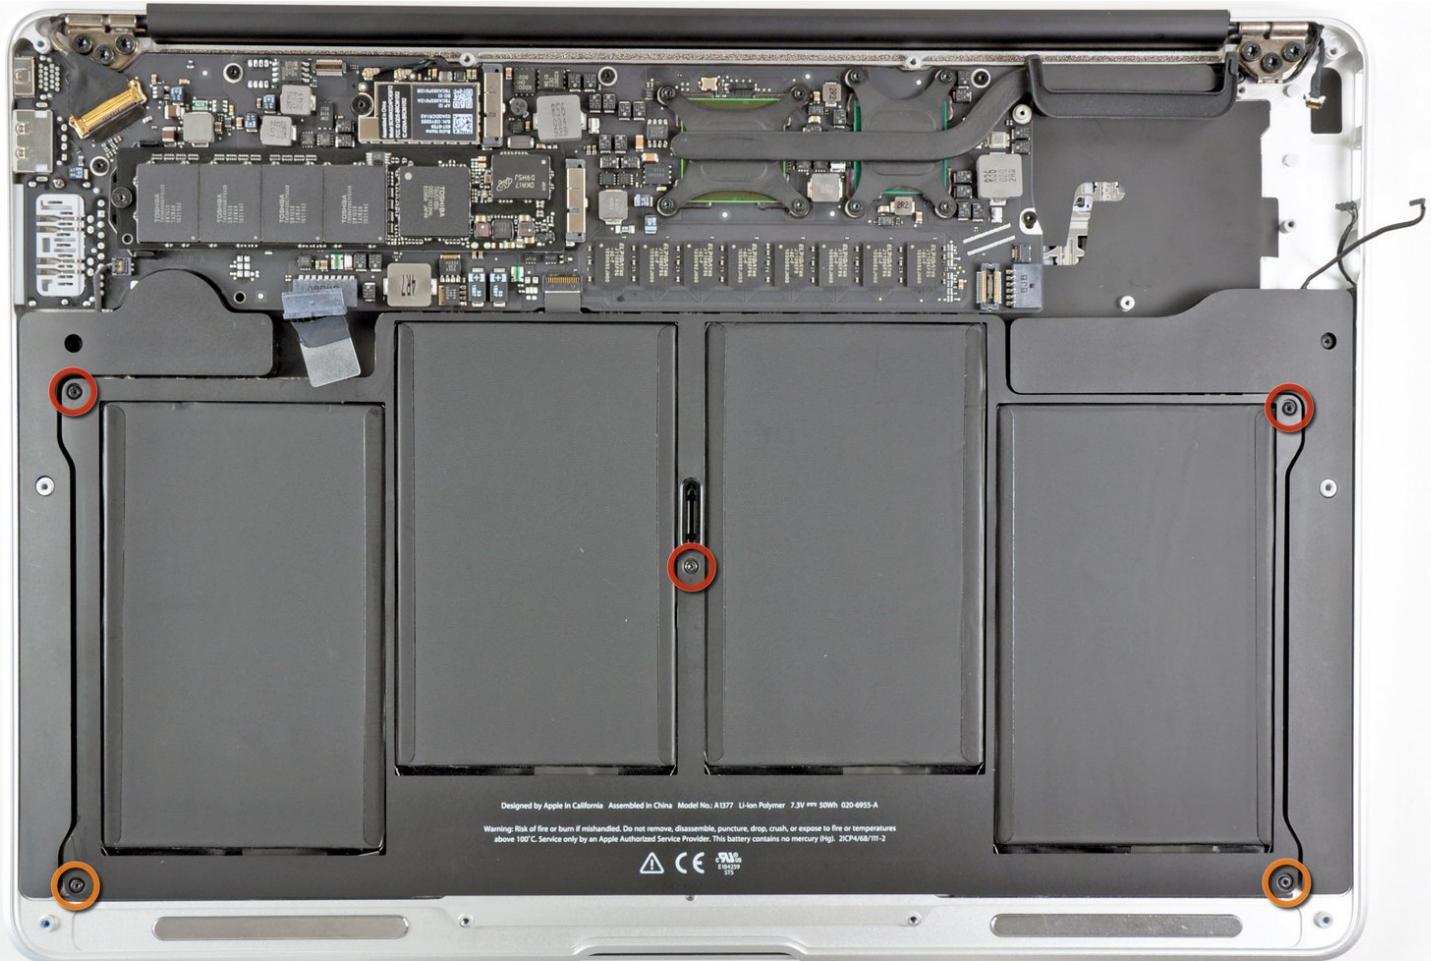


## INTRODUCTION

Prerequisite. Removing battery when fan is out.

### TOOLS:

- T5 Torx Screwdriver (1)

## Step 1 — Battery

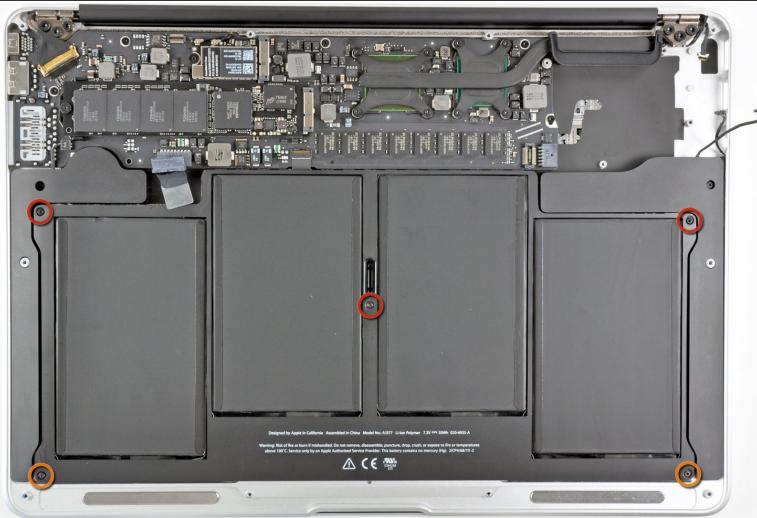

- Remove the following five screws securing the battery to the upper case:
  - Three 6.3 mm T5 Torx screws
  - Two 2.4 mm T5 Torx screws

## Step 2



When handling the battery, avoid squeezing or touching the four exposed lithium polymer cells.

- Lift the battery from its edge nearest the logic board and remove it from the upper case.

To reassemble your device, follow these instructions in reverse order.