



MacBook Pro 17" Unibody Feet Replacement

Replace the feet on the MacBook Pro 17".

Written By: Arthur Shi



INTRODUCTION

Replace the missing feet for your MacBook Pro 17".


TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [Tweezers](#) (1)
- [Isopropyl Alcohol Wipes](#) (1)
- [Adhesive Remover Kit](#) (1)

PARTS:

- [MacBook and MacBook Pro Unibody Plastic Feet](#) (1)

Step 1 — Lower Case

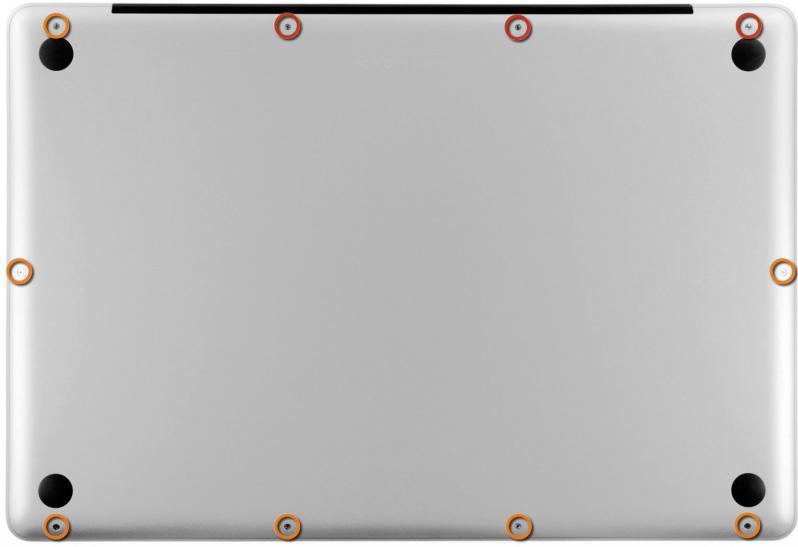


- Remove the following ten screws securing the lower case to the upper case:
 - Three 13.5 mm Phillips screws.
 - Seven 3 mm Phillips screws.

Step 2



- Wedge your fingers between the lower case and the vent, and lift upward to release the two clips holding the lower case to the upper case.
- ➡ During reassembly, carefully align the lower case and then press it firmly until both clips engage.
- Remove the lower case.

Step 3 — Feet

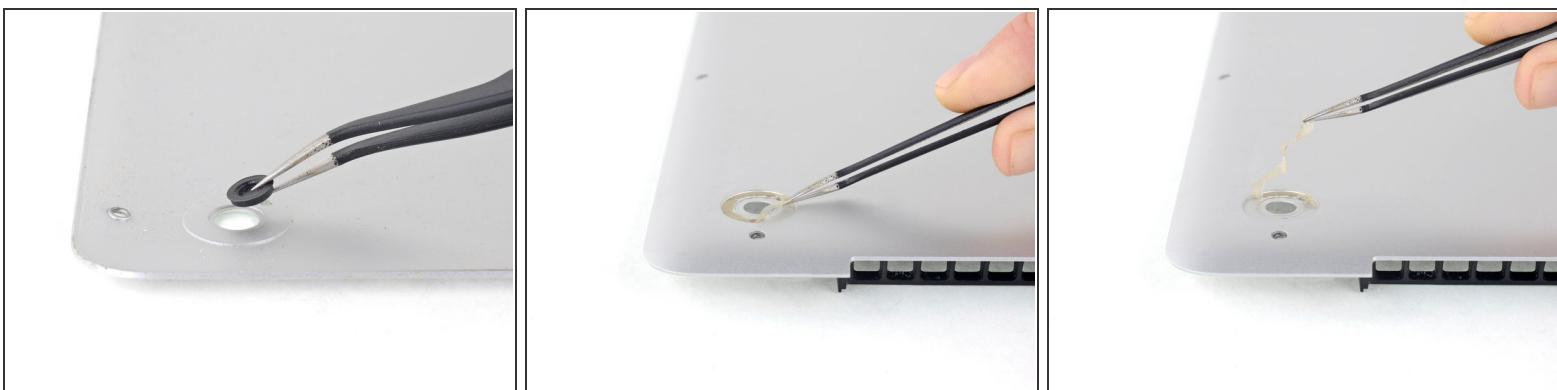

- Remove any broken or damaged feet.
- Remove any pieces from the old foot that may have broken off in the foot hole.
- Use tweezers to peel up and remove the old adhesive tape from the foot pad.

This document was generated on 2019-10-07 10:34:21 PM (MST).

Step 4




- Scrub the foot pad with adhesive remover to remove any remaining adhesive.

Step 5



- Wipe the foot pad with an alcohol prep pad to remove any residue left by the cleaner.

Step 6

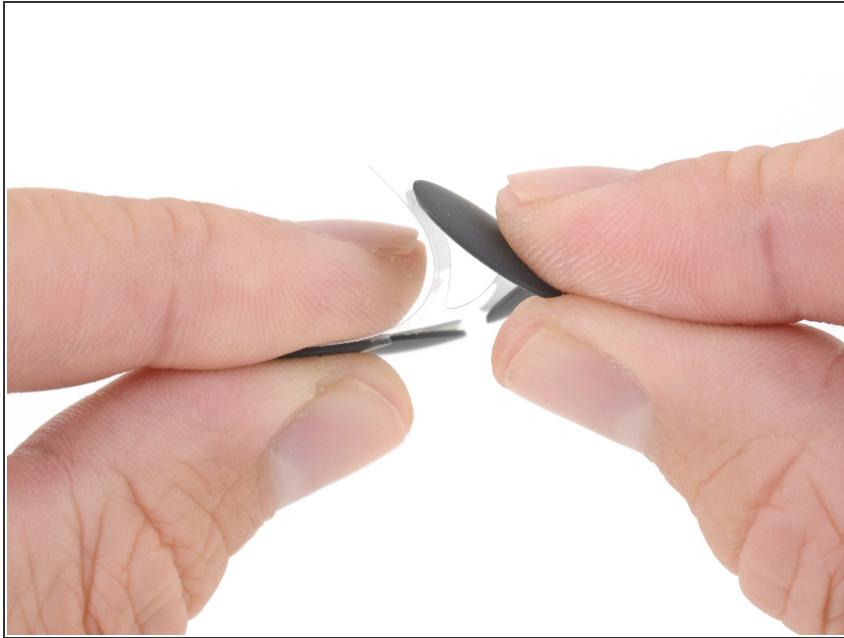

- Peel a replacement foot from the plastic backing.

Step 7



- Align the new foot inside the foot pad.
- Make sure the alignment nub on the foot is lined up with the small hole near the perimeter of the pad.
- Lay the foot down while keeping it properly aligned.
- Check for proper alignment from the inside of the lower case. Use tweezers to slide the alignment nub so it lines up with the hole.

Step 8



- Press the new foot down firmly with your finger and maintain pressure for 30 seconds to set the pressure sensitive adhesive. Support the other side of the cover while you press the foot down.
- Repeat the last six steps for any broken or damaged feet.

To reassemble the device, replace the lower case and all of the screws.