



Macintosh Powerbook 5300cs Keyboard Replacement

This repair guide shows how to insert and remove the keyboard.

Written By: Ronan



 **TOOLS:**

- T9 Torx Screwdriver (1)

Step 1 — Battery



- The battery compartment is located in the front-right side of the laptop.

Step 2



- To insert the battery, gently slide it into the compartment until it clicks in place.
- To remove, slide the button highlighted in the red rectangle to the right to release the battery and slide it from the compartment.

Step 3 — Keyboard




- With the laptop upside down and with the battery removed, use a Torx #9 screw driver to remove the three .84 in. screws shown.

Step 4



- Carefully pull up on the front of the keyboard to pop it out from the case.
- Then slide the back out so the keyboard becomes nearly free.

Step 5

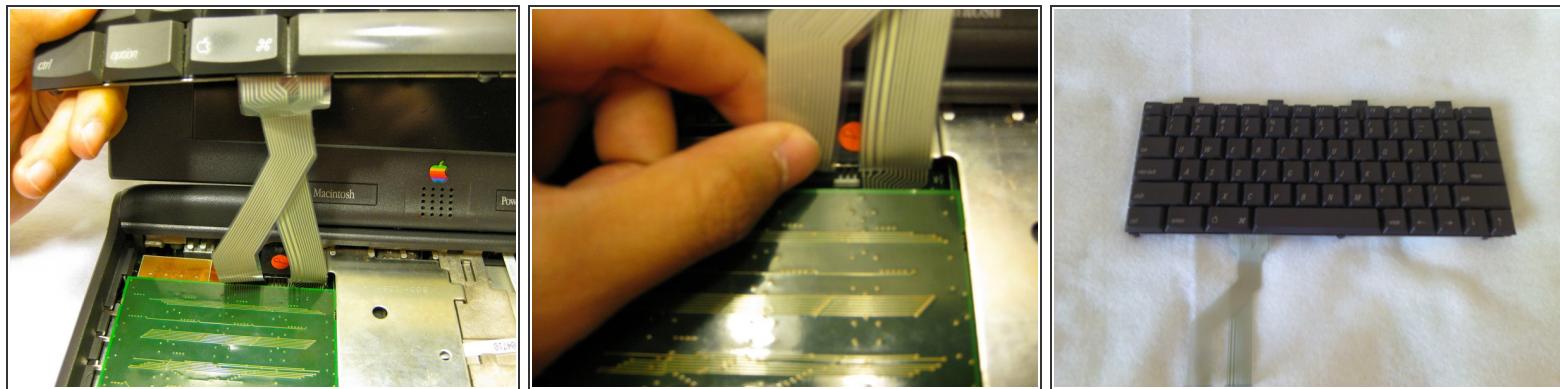

- Disconnect the ribbon that is connecting the keyboard to the rest of the computer.
- Pull the keyboard out and repair or replace as needed.

To reassemble your device, follow these instructions in reverse order.