



Magellan Cyclo 505 Battery Replacement

How to replace the battery that they want you to send the unit back to the seller to have done

Written By: Mark Symons



INTRODUCTION

10 minute job to replace the battery that they want you to send the unit in to the supplier to pay them to do it.

TOOLS:

- Small Plastic Spudger (1)
- Double-Sided Tape (1)
- T5 Torx Screwdriver (1)

PARTS:


- BP-DG500-11/1500 MX battery or compatible (1)

Step 1 — Battery



- Start lifting the snap on rear cover by inserting a plastic guitar pick/phone opener between the case and the cover starting in the charging bay area. Slide it around the entire cover until it comes away. It will make clicking sounds as you do so. It's ok that is the little snap on locks opening.

Step 2

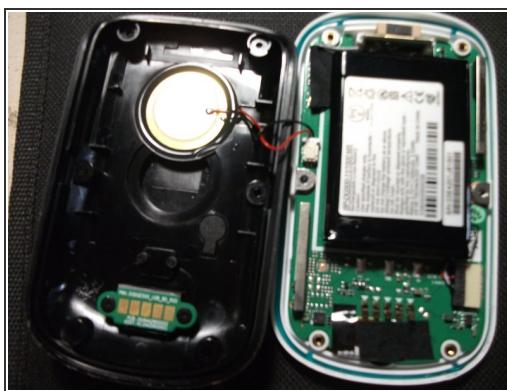

- You will now see 6 x T5 torx screws that need to be removed. Remove them and the case will open up. The battery is held in by some double sided tape and plugged in. Remove it and put in the new one.

To reassemble your device, follow these instructions in reverse order.