




# Magellan RoadMate 1200 Battery Replacement

Written By: Ross Light

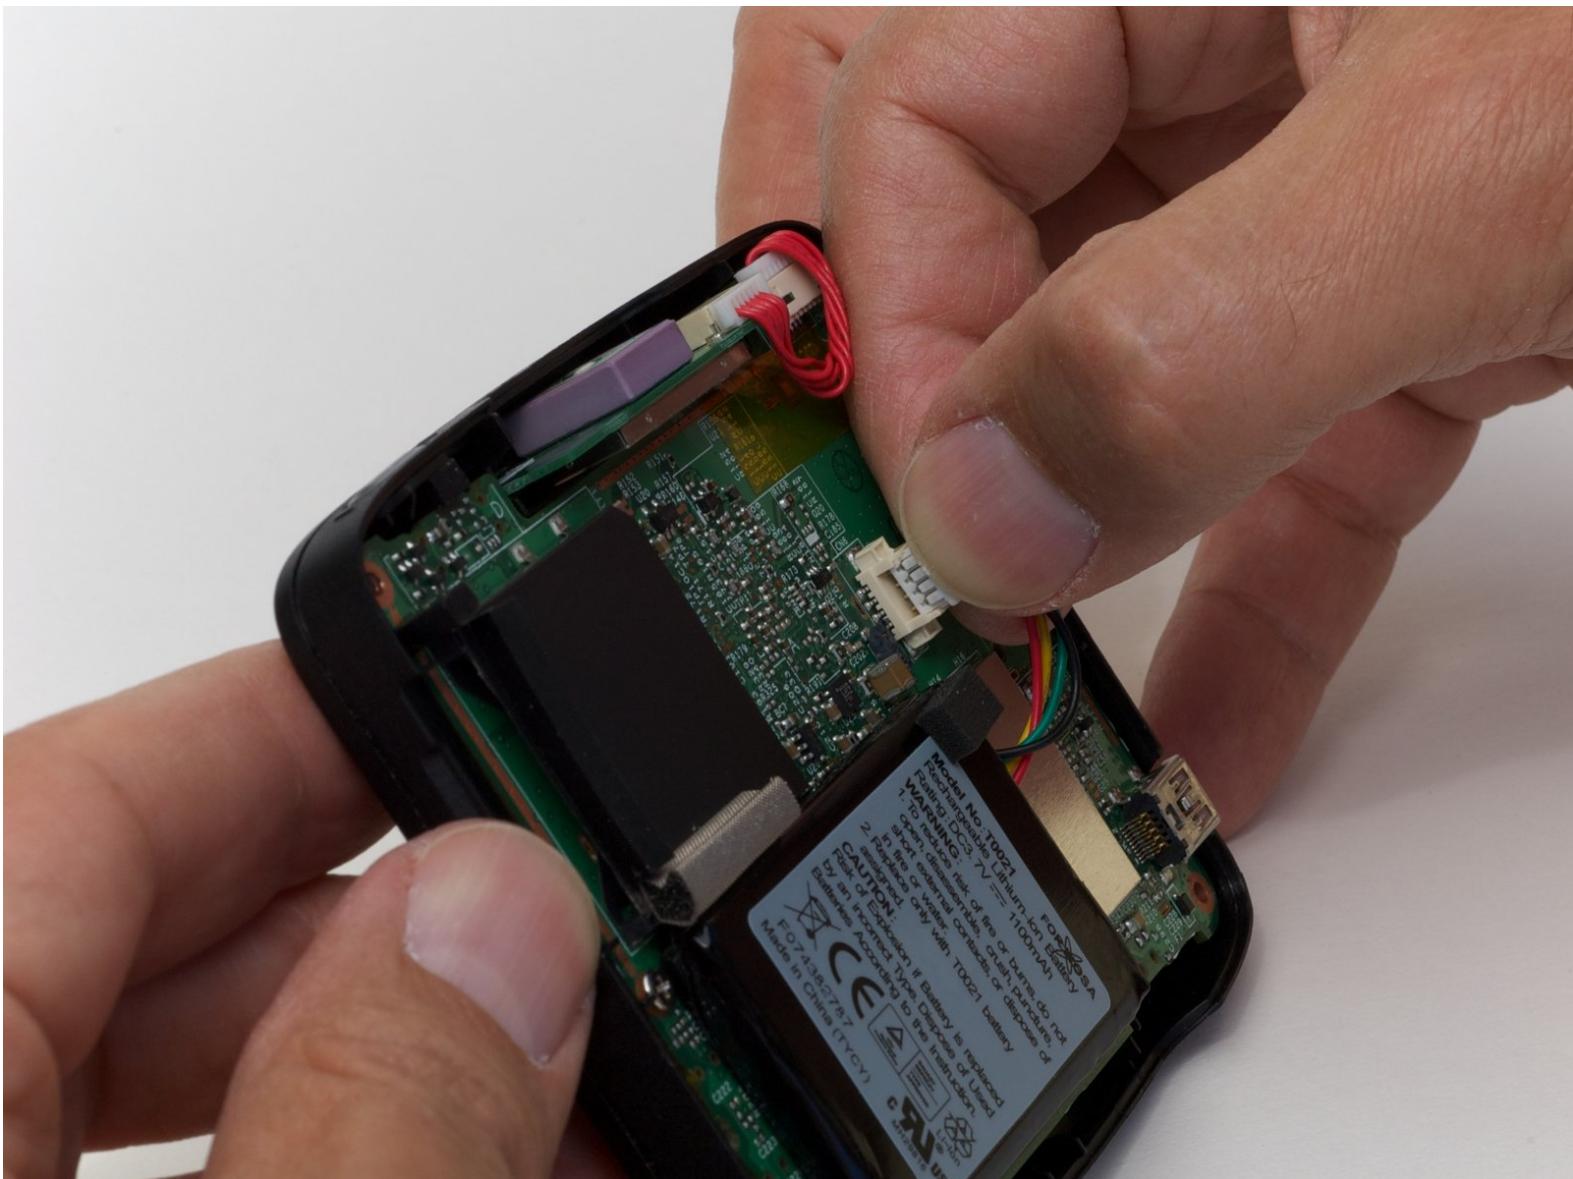

## INTRODUCTION

You can change the battery by opening up the GPS.

### TOOLS:

- [Phillips #00 Screwdriver](#) (1)

## Step 1 — Back Cover




- Remove the four rubber caps from the back by using the Phillips #00 screwdriver.

## Step 2



- Remove the four screws holding the cover in place by using the Phillips #00 screwdriver.


## Step 3

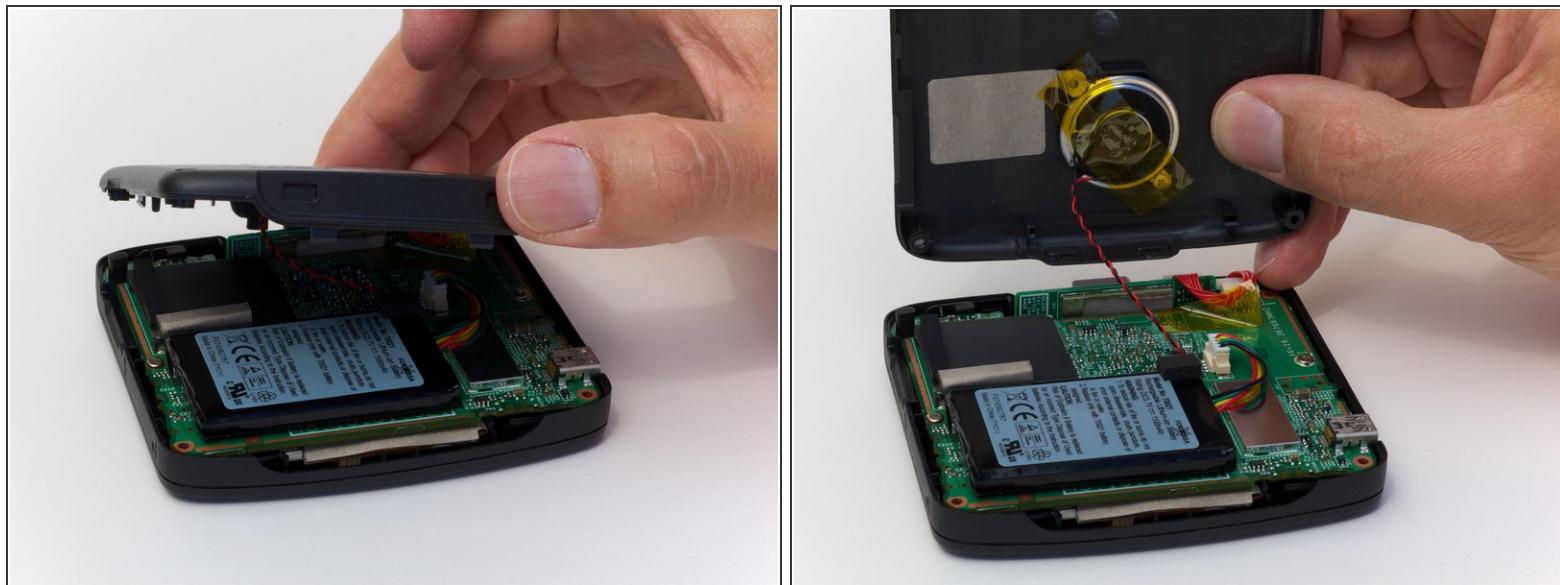

- Remove the back cover from the device by separating the back cover along its seam.

**⚠** Slowly lift the cover—the speaker is screwed onto the back cover and is connected to the circuit board.

## Step 4

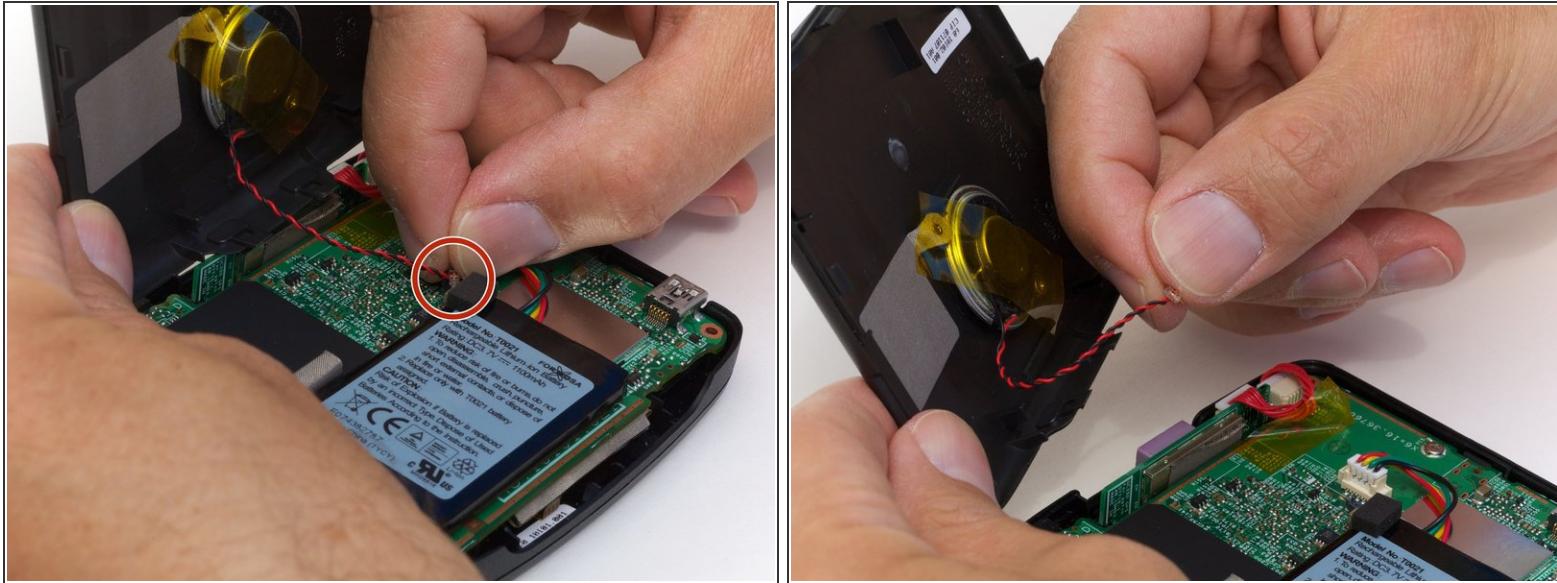

- Pull the speaker cord, horizontally, by its base, away from the motherboard.
- ★ When reassembling, make sure that you plug the terminal in the same way. The black wire should be on the side farthest from the battery.

## Step 5 — Battery



- Disconnect the battery connector from the circuit board.
- Pry the battery off the circuit board. The adhesive attaching it shouldn't require any other tools.

To reassemble your device, follow these instructions in reverse order.