



Magellan RoadMate 1440 Back Cover Disassembly

How to remove the back cover of the GPS for replacement or prior to other guides.

Written By: Benton Burns



INTRODUCTION

The back cover needs removed before any other guide is executed.

TOOLS:

- Phillips #0 Screwdriver (1)

Step 1 — Magellan RoadMate 1440 Back Cover Disassembly




- Place the GPS with the screen facing down.

Step 2



- Remove the four 4.2 mm screws on the back cover of the device using a Phillips #0 screwdriver.

Step 3

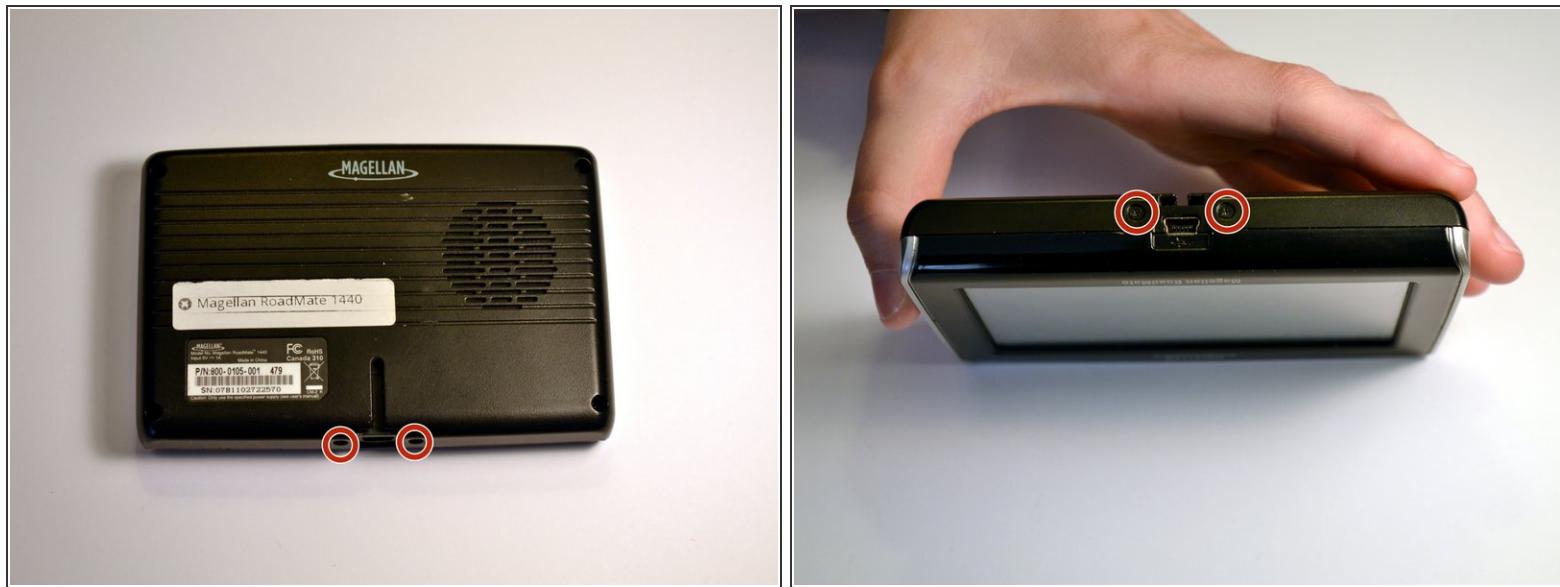

- Remove the two 4.2mm screws at the bottom of the device using a Phillips #0 screwdriver.

Step 4



- Insert the black spudger into the crease in the side of the GPS.
- Move the end of the spudger down to break the seal between the two plastic shells.
- Continue doing this along each side of the GPS to ensure a smooth removal.

Step 5



- Fully separate the two sides of the case.
- Remove the tape on the battery wires and the tape on the speaker wires.

To reassemble your device, follow these instructions in reverse order.