



# Magellan Roadmate 9055-LM Back Panel Disassembly

This Guide will show you how to safely remove the back panel of the GPS

Written By: YuChe Chang



## INTRODUCTION

Removing the back panel is the required step to replace anything for the gps

### TOOLS:

- [iFixit Opening Tools](#) (1)
- [Phillips #0 Screwdriver](#) (1)

## Step 1 — Magellan Roadmate 9055-LM Back Panel Disassembly



⚠️ Flip your device with back panel facing up.

## Step 2



- Unscrew four Phillips #0 screws from the back panel.

## Step 3




- Unscrew two Phillips #0 screws from the back panel.

## Step 4



- Use a plastic opening tool to pop the right side of the panel.



## Step 5

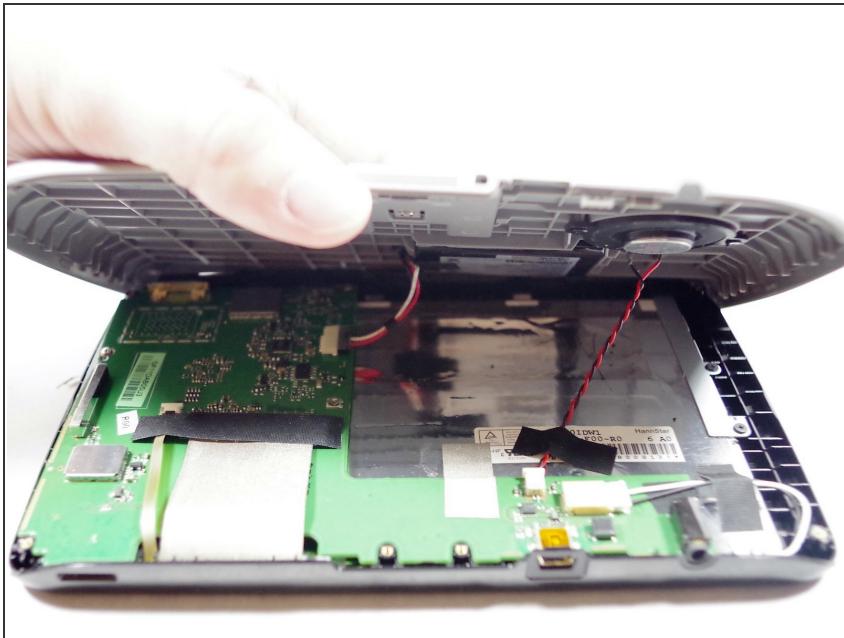

Lifting the back panel too quickly or forcefully may damage the speaker cable and battery cable, which are still attached underneath.

- Gently lift up the back panel.

## Step 6

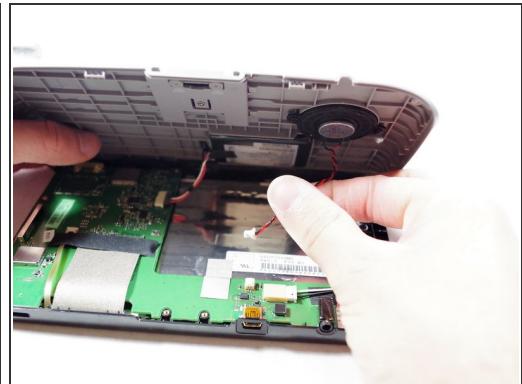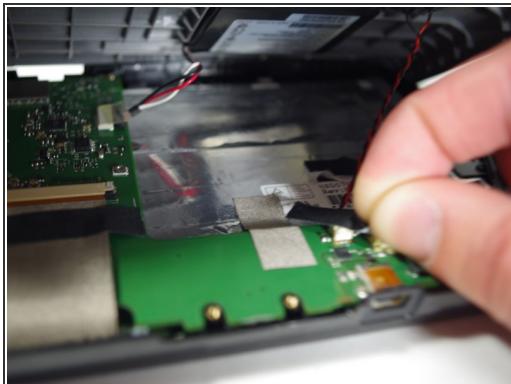

- Remove the tape.
- Unplug the cable for the speaker.

## Step 7



- Remove the cable of the battery.

*(i)* Tape removal is not necessary.

## Step 8



- Place the back panel gently on the table.

To reassemble your device, follow these instructions in reverse order.