




Magellan Roadmate 9055-LM Speaker Replacement

How to replace the speaker from the gps

Written By: Giovanni

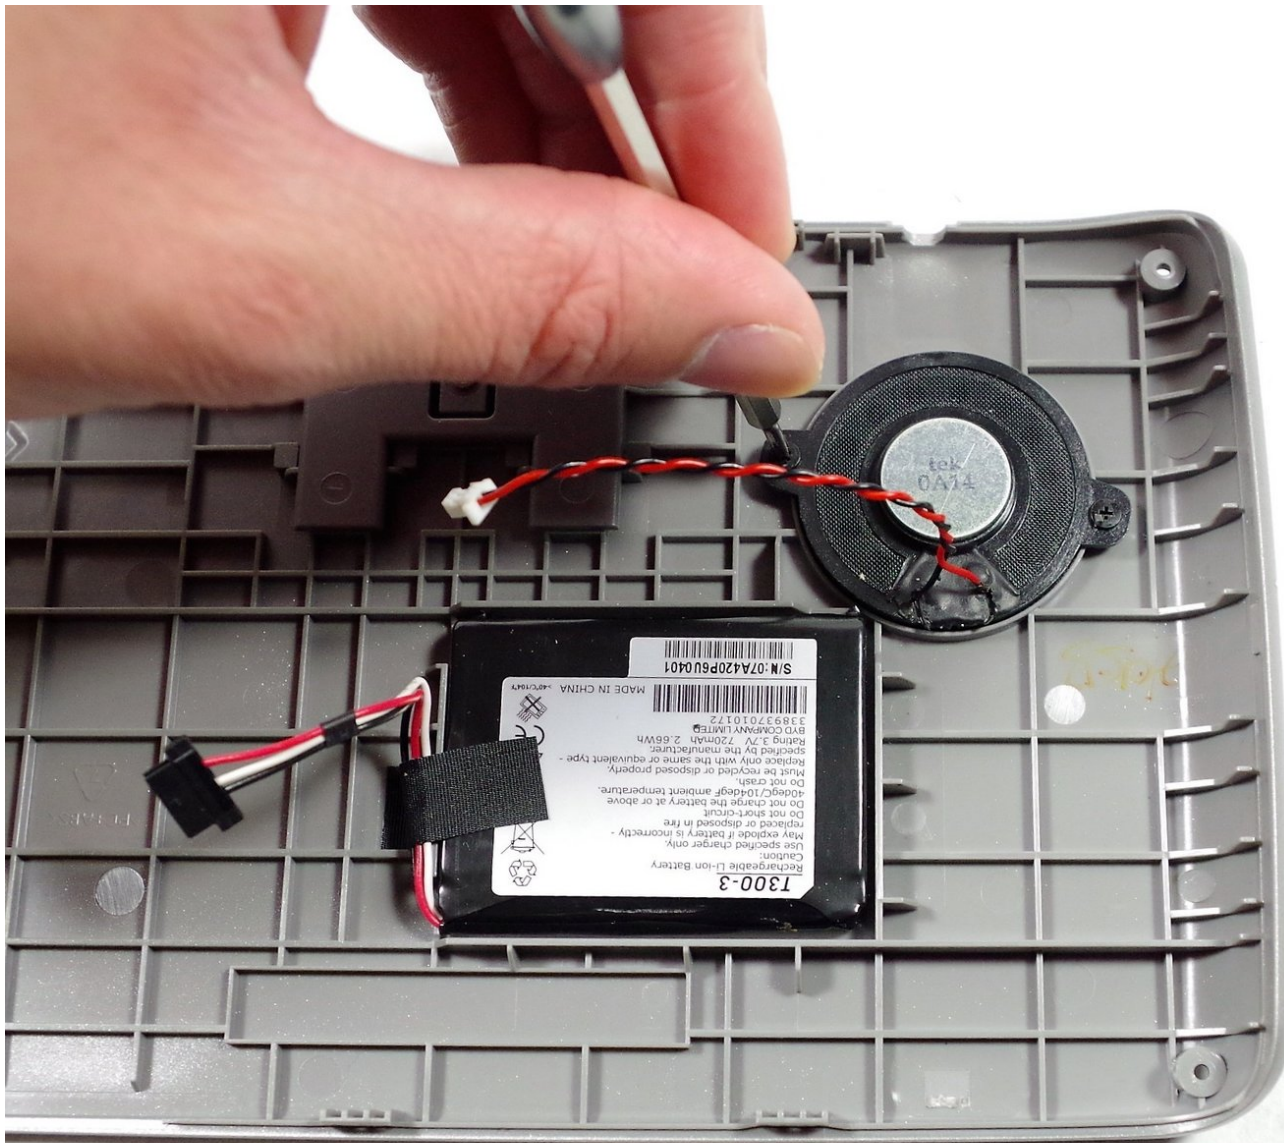

 TOOLS:

- [iFixit Opening Tools](#) (1)
 - [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Magellan Roadmate 9055-LM Back Panel Disassembly



⚠ Flip your device with back panel facing up.

Step 2



- Unscrew four Phillips #0 screws from the back panel.

Step 3




- Unscrew two Phillips #0 screws from the back panel.

Step 4



- Use a plastic opening tool to pop the right side of the panel.



Step 5

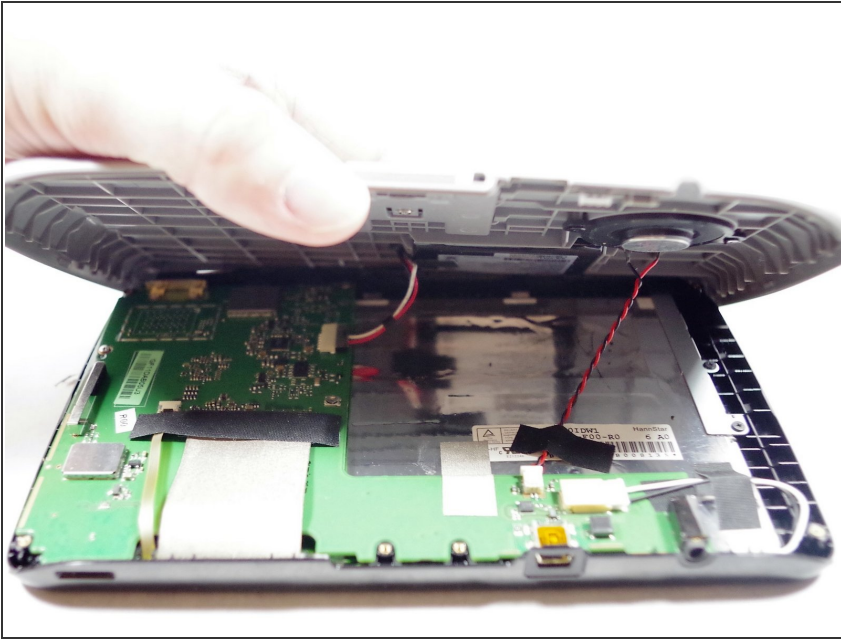

⚠️ Lifting the back panel too quickly or forcefully may damage the speaker cable and battery cable, which are still attached underneath.

- Gently lift up the back panel.

Step 6

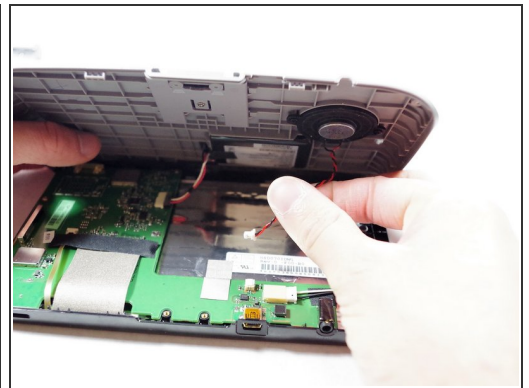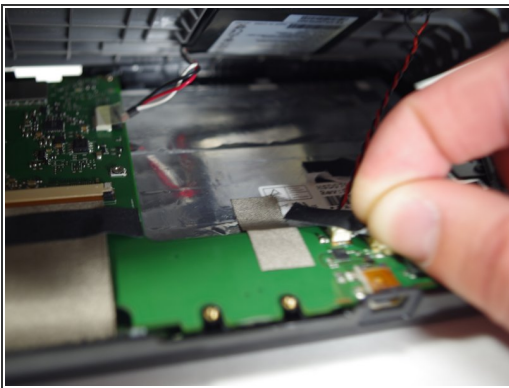

- Remove the tape.
- Unplug the cable for the speaker.


Step 7



- Remove the cable of the battery.


 Tape removal is not necessary.

Step 8

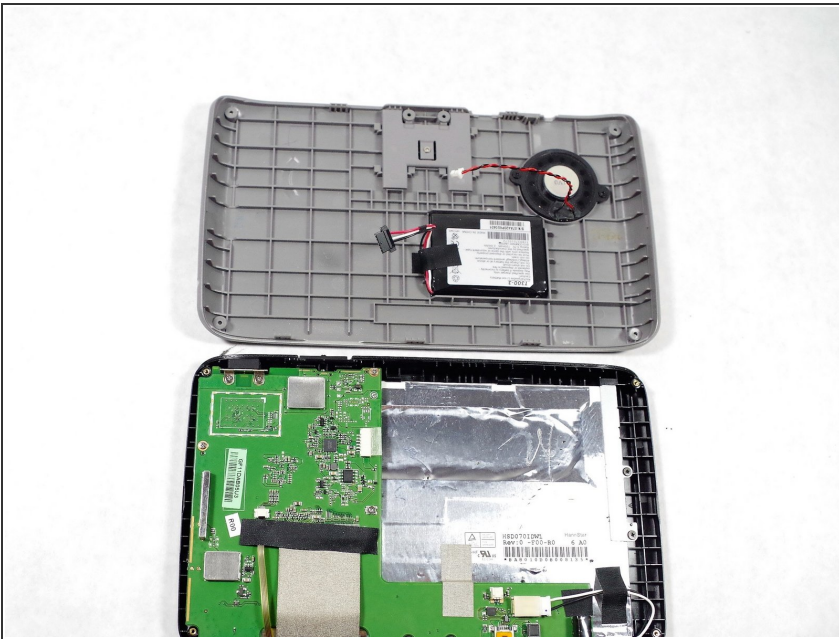

- Place the back panel gently on the table.

Step 9 — Speaker

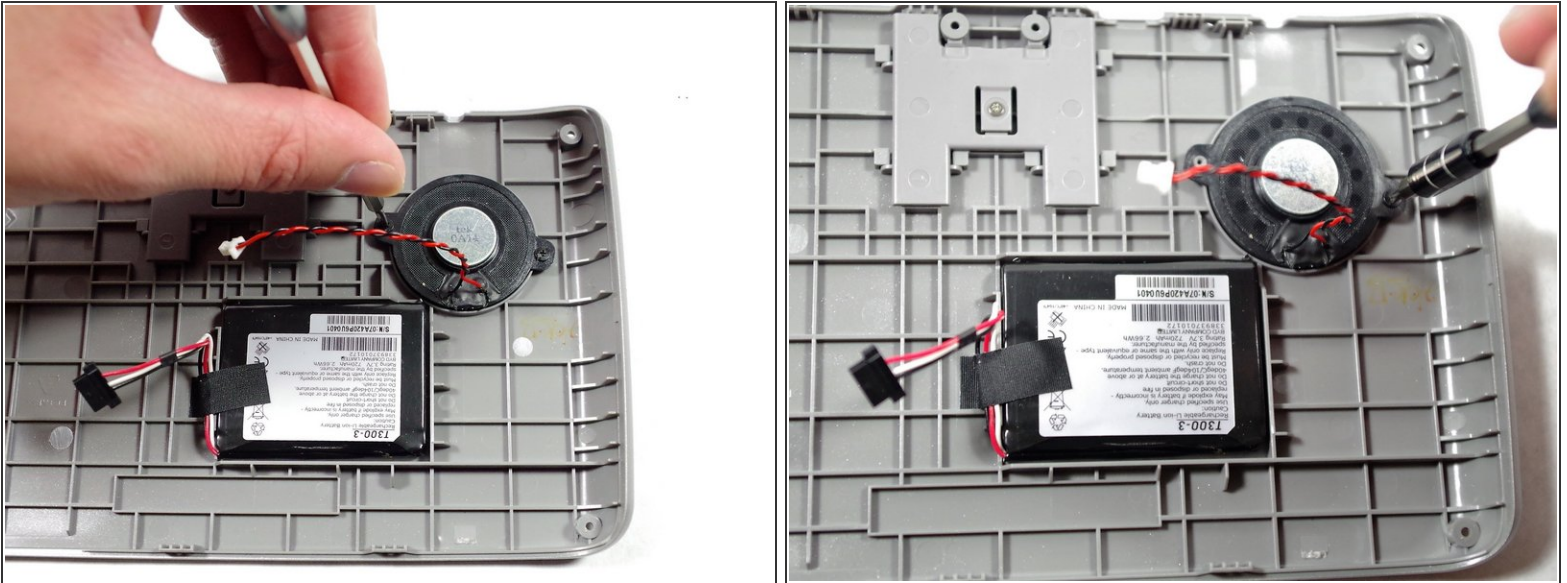

- Unscrew the left and the right screws using the ifixit screwdriver.

Step 10



- Now that you removed the screws, you can finally replace the speaker.

To reassemble your device, follow these instructions in reverse order.