



Maisto Rock Crawler Remote Circuit Board Replacement

Use this guide to replace the remote circuit board in your Maisto Rock Crawler

Written By: kevin



INTRODUCTION

This guide will walk you through the process of the remote circuit board in a Maisto Rock Crawler.

TOOLS:

- [Soldering Workstation \(1\)](#)
- [JIS Driver Set \(1\)](#)


Step 1 — Remote Circuit Board



⚠ Remove the batteries before doing anything.


- Use the driver and bit J1 to remove the five 9.5mm Philips screws holding the remote together.

Step 2

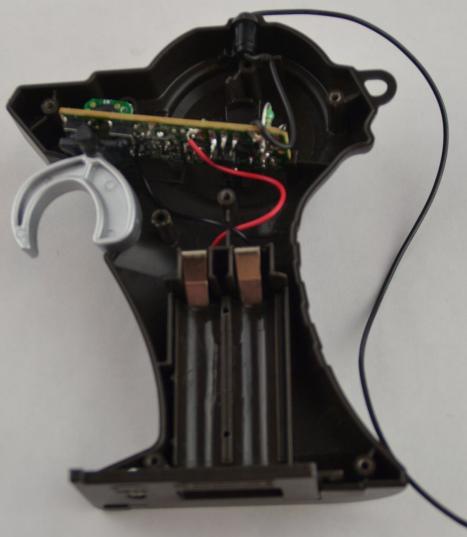

- Take off the half of the remote that had the screw heads facing up.

Step 3

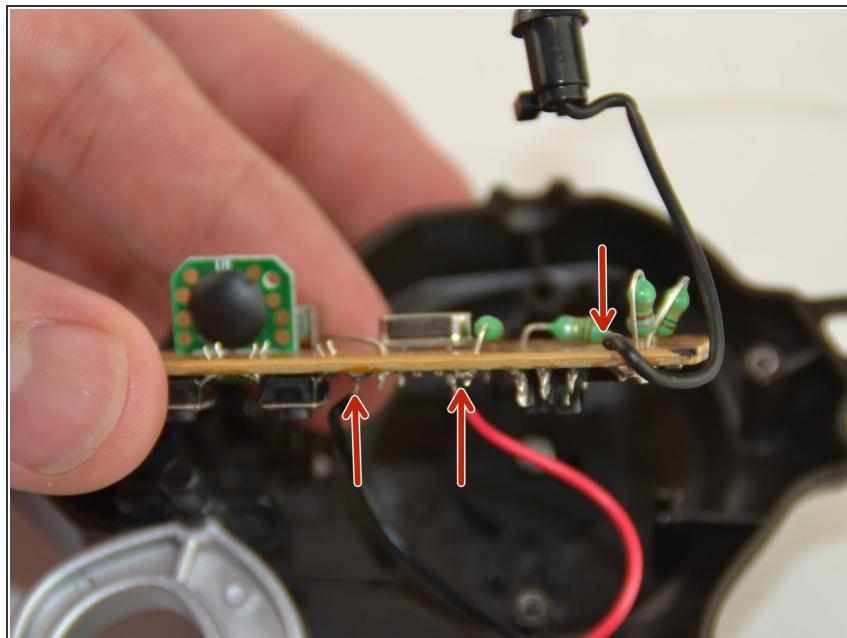

- Slide out the circuit board.
- ⚠ Use the soldering iron to desolder the 3 wires.

To reassemble your device, follow these instructions in reverse order.