




Matsunichi MarquisPad MP977 Battery Replacement

This guide will demonstrate how to replace the battery in the Matsunichi MarquisPad MP977.

Written By: Evan Campbell

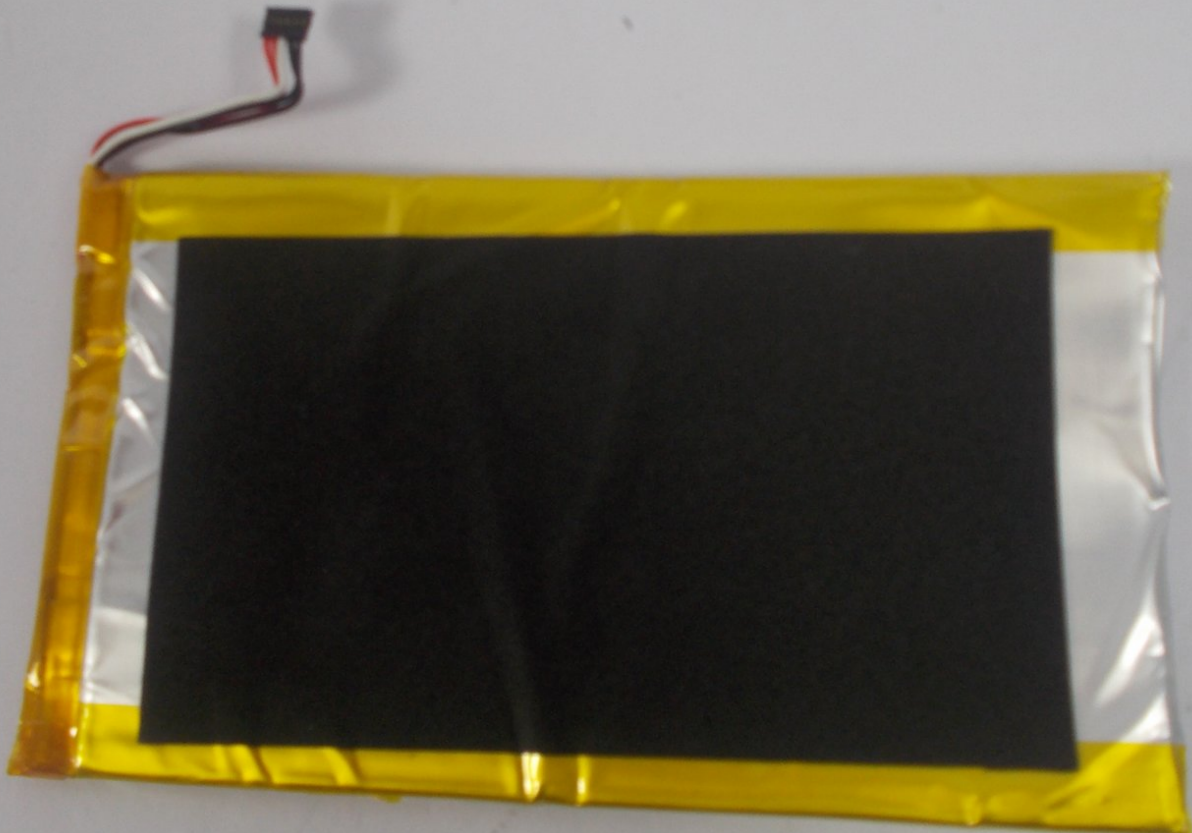



TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)

Step 1 — Battery



- Remove the two screws using a PH #00 Phillips head screw driver.

Step 2



- Place the device face down on a flat surface.
 - Insert one of the wide tipped, plastic opening tools into the top of the left speaker slot.
 - ⚠ Be sure not to puncture the covering of the speaker.
- Pry the back plate open and slide the tool in a clockwise direction, moving it along the opening between the device and its back plate until you reach the power button.

Step 3




- Insert opening tool into the right speaker slot.
- Pry open the back plate, and slide the tool counter clockwise along the device until you reach the charging port.

Step 4





- Remove the back plate and place it to the side.

Step 5

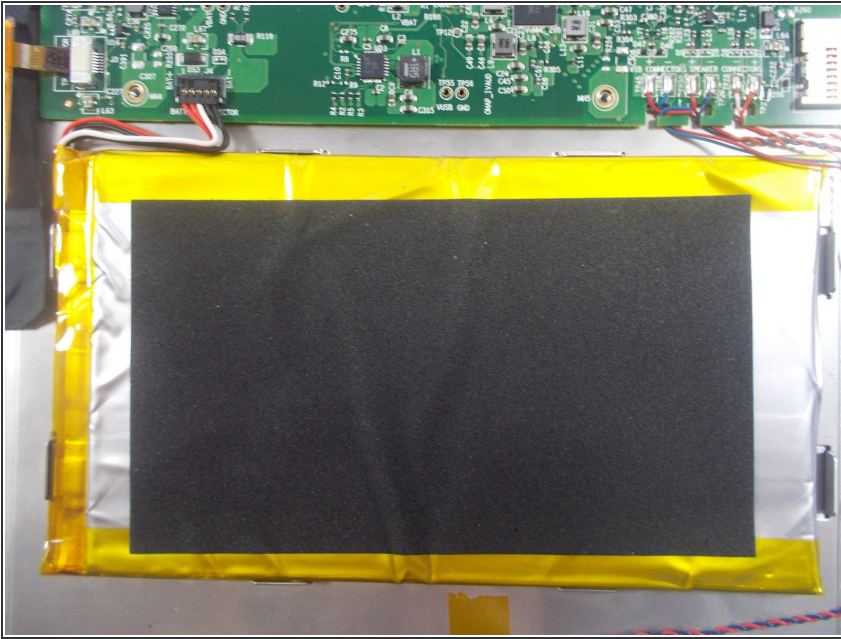

- Detach the battery from the motherboard.

Step 6

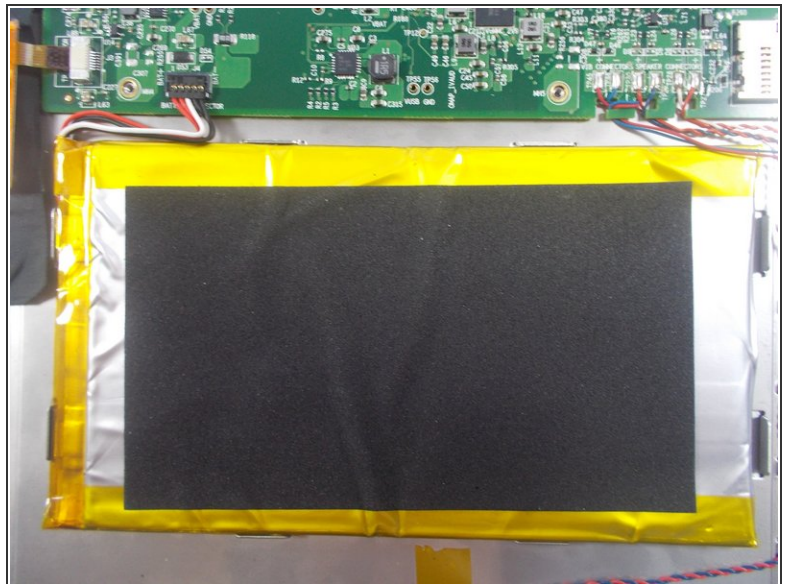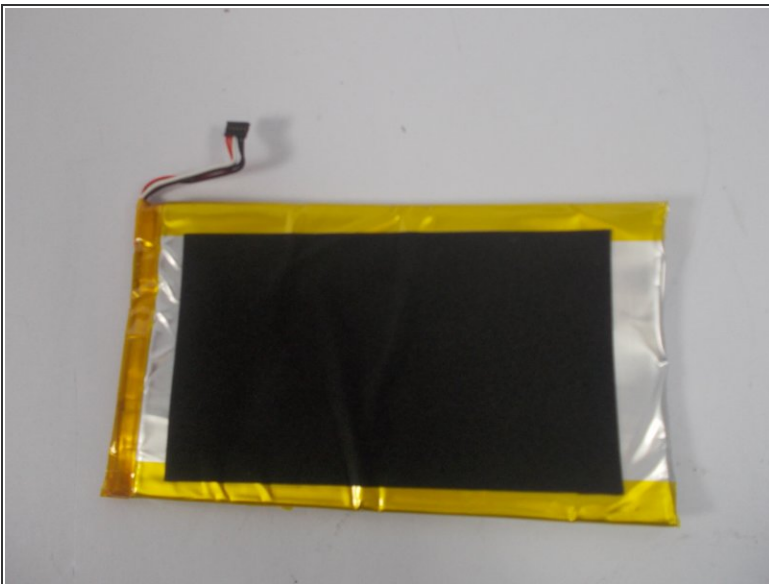

- Plug in the new battery.

To reassemble your device, follow these instructions in reverse order.