



Meizu MX3 Battery Replacement

This guide shows how to replace the battery in the 5.1 inch Meizu MX3

Written By: Mandela Robin



 **TOOLS:**

- [iFixit Opening Tools \(1\)](#)
- [64 Bit Driver Kit \(1\)](#)

Step 1 — Removing the Back Cover




- Insert the plastic opening tool in between the charging port and the back case of the device. Slowly move the tool to the left of the until you come the top by the power button.
- Using a paper clip or pointed edge spudger push in the pin located in the bottom right had corner of the back of the phone.

Step 2 — Removing the Screws in the Internal Casing



- Using one of the small Phillips screwdriver bits provided unscrew the 11 screws present on the protective plastic plate under the device case.

Step 3 — Removing the Battery

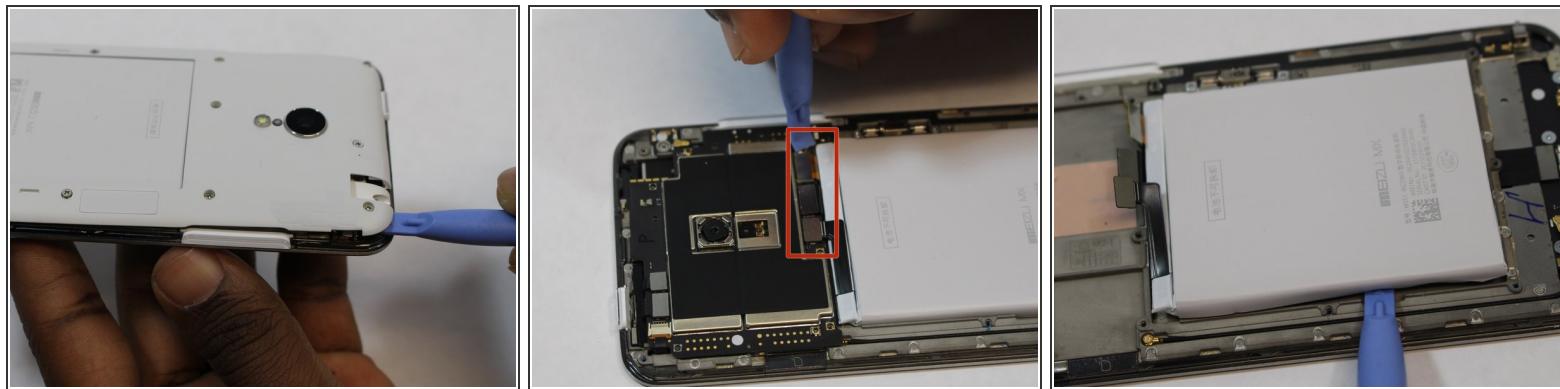

- After the 11 screws are loosened use the plastic opening tool and gently pry the protective plate from the back of the device.
- Once the plate is off, use the same tool to gently remove the 3 ribbon cables located directly above the battery.
- On the left side of the battery on the phone case, there is a groove where the plastic opening tool can be inserted to pry the battery up and out.

(i) The battery might be glued to the phone so exercise caution.

To reassemble your device, follow these instructions in reverse order.