



Mi Airdots disassembly

We'll disassemble the charging case and the earphones to discover its interior. Feel free to correct the traduction, english is not my first language.

Written By: Pau Colomé Diaz



 **TOOLS:**


- 1 x Opening Picks (1)
- Phillips #0 Screwdriver (1)

Step 1 — Case opening.




- With an opening pick we will leverage the edge between the interior part in which the earphones are placed and the exterior case. We will surround entire inner part with the opening pick until it comes out.

Step 2 — Board disassembly

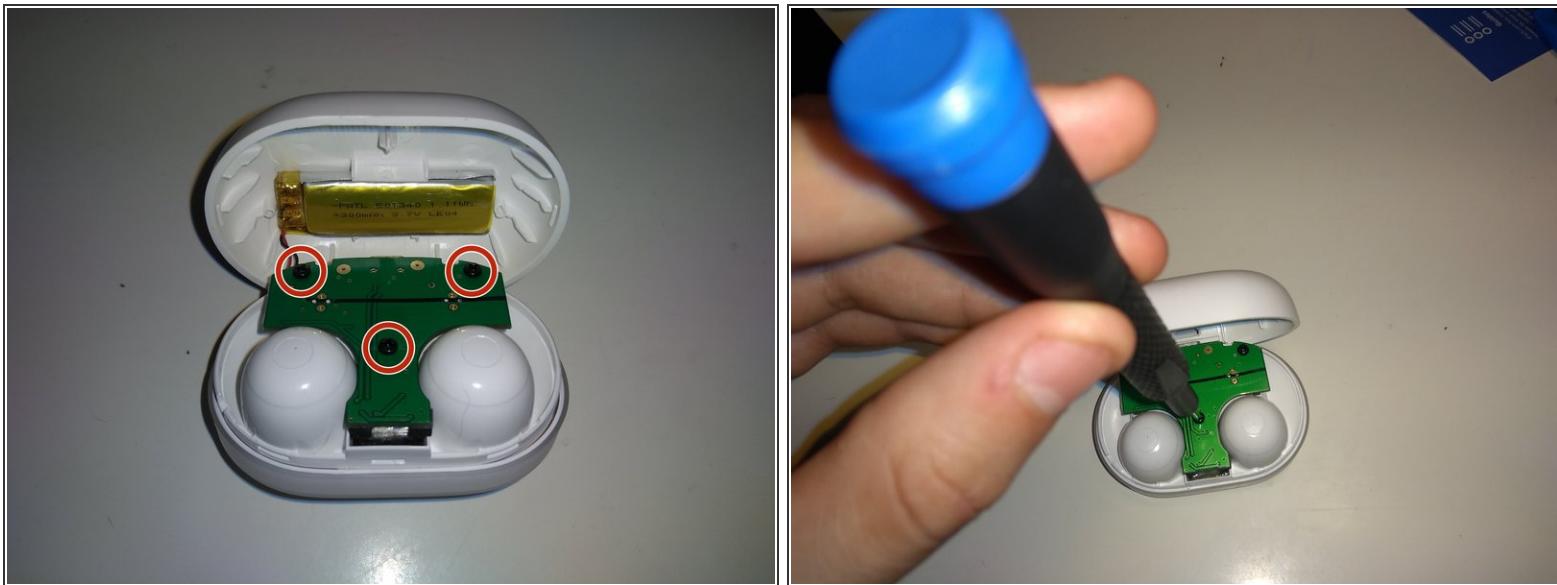

- We will unscrew the 3 screws that join the board to the part where we place the earphones (with a *Phillips 00* screwdriver).

Step 3 — Assembly

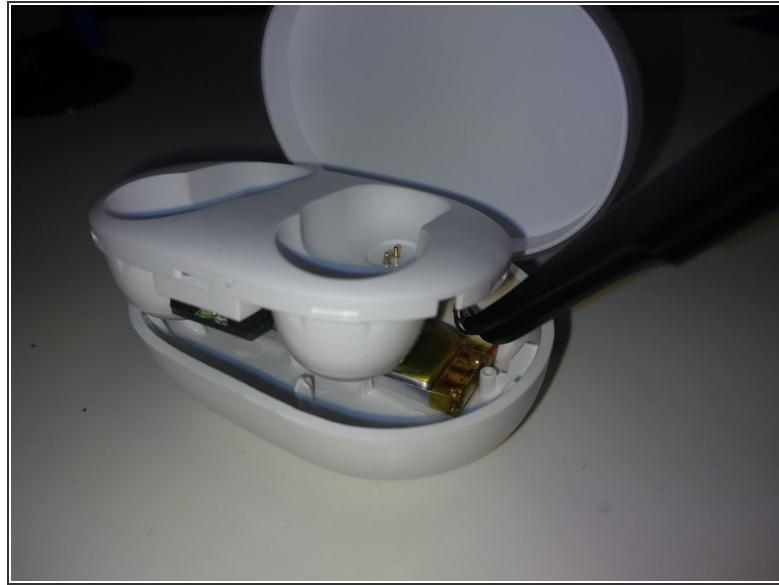

- The Mi Airdots case will be disassembled.
- To assemble it, the screws are replaced as they are in step 2. We look to place the cables that connect the plate to the battery so that we do not crush them when we assemble the box.

To reassemble your device, follow these steps in reverse order.