



Minolta QTsi Maxxum View Finder Replacement

This guide will show you how to replace the viewfinder in the Minolta QTsi Maxxum .

Written By: Maya Van Londen



INTRODUCTION

Replace your viewfinder if it breaks so that you can see through the camera to take pictures.

TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [Coin](#) (1)

Step 1 — View Finder



- Locate the battery compartment on the bottom panel of camera.
- Use a small coin to untwist and open the batter compartment door.
- Twist the coin counterclockwise to unlock the battery compartment door.

Step 2



- Two batteries are located inside the battery compartment
- Be careful, the batteries inside the compartment are small and easy to lose.
- Remove the two batteries from inside the battery compartment by individually pulling each out.

Step 3



- When the batteries are removed from the compartment, one screw will be visible in the bottom of the chamber.
- Unscrew the (1) black Phillips #00 5mm screw from the bottom of the battery chamber.

⚠ Be careful when unscrewing the screw because it's small and is easy to lose.

Step 4



- Remove the (2) black Phillips #00 5mm screws that lie on either side of the view finder.

⚠ Be careful because the two screws are small and are easy to lose.

Step 5



- Remove the (1) black Phillips #00 5mm screw from underneath the flash hood.

⚠ Be careful because the screw is small and is easy to lose.


Step 6



- Once all screws are removed, the top of the camera should come off easily.

⚠ Be careful when removing the top, there are wires connected that could be damaged.

Step 7

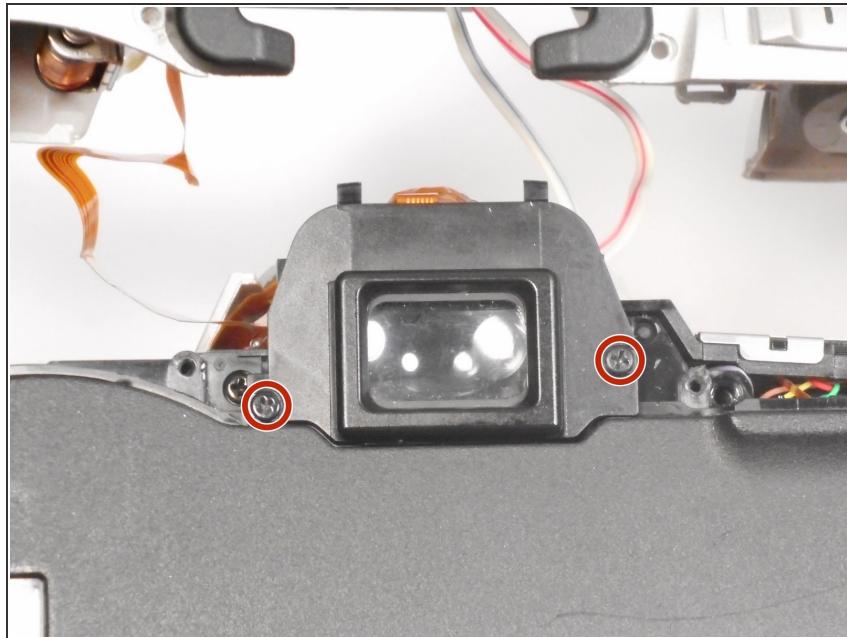

⚠ The viewfinder will fall when the screws are removed.

- Remove the (2) black Phillips #00 5mm screws that hold the viewfinder.

⚠ Be careful because the screws are small and easy to lose.

To reassemble your device, follow these instructions in reverse order.