



Mio ALPHA 2 Screen Replacement

This guide is to help users to replace the screen of the Mio ALPHA 2.

Written By: Wong Jun Hua



INTRODUCTION

To replace the screen of the Mio ALPHA 2, firstly you would need a proper repair toolkit. This is a relatively easy replacement as you would only need a Philip screwdriver with a PH0 head and tweezers. Be careful not to apply too much force or tug the cords inside.

This guide would be helpful if you're trying to replace the screen of your Mio ALPHA 2.

TOOLS:

- [JIS #00 Screwdriver](#) (1)
- [Tweezers](#) (1)



PARTS:



- [Mio ALPHA 2 screen](#) (1)

Step 1 — Motherboard



- Remove the four 6.7mm JIS #00 screws from the back cover.

Step 2

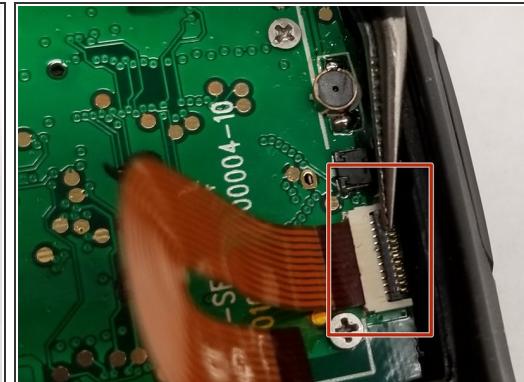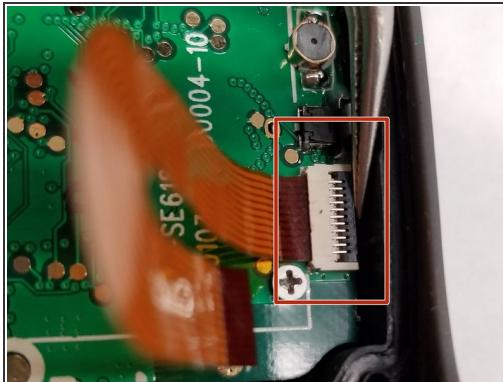


- Pull off the back cover of the watch
- Use a pair of tweezers to flip up the retaining flap on the ribbon cable [ZIF](#) socket.
- Remove the ribbon cable from its socket.

Step 3



- Remove the four 3.8mm JIS #00 screws from the motherboard.
- Remove the motherboard with tweezers

Step 4 — Screen

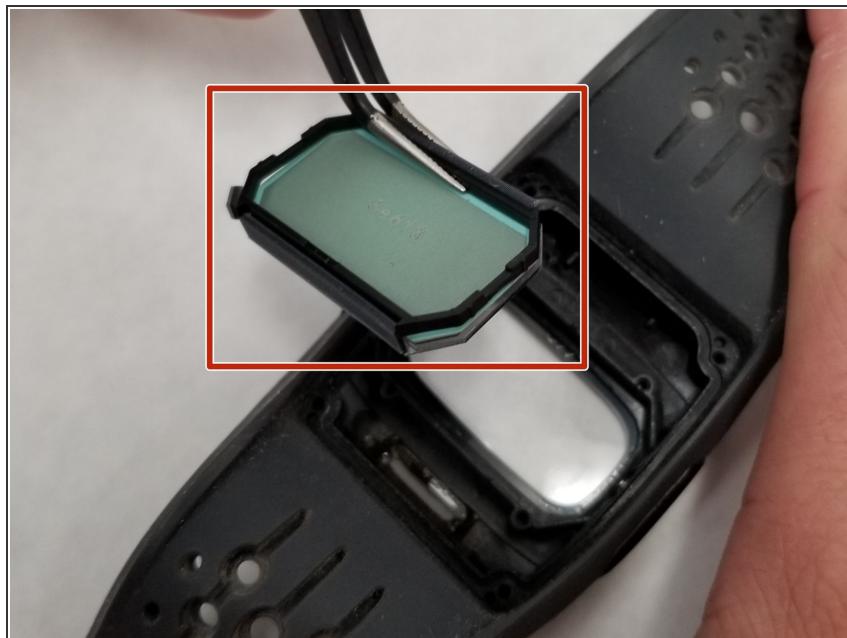

- Remove the screen using tweezers.

To reassemble your device, follow these instructions in reverse order.