




# Motorola 120c Display Replacement

This guide shows how to remove the Motorola 120c display.

Written By: Eric Dazet

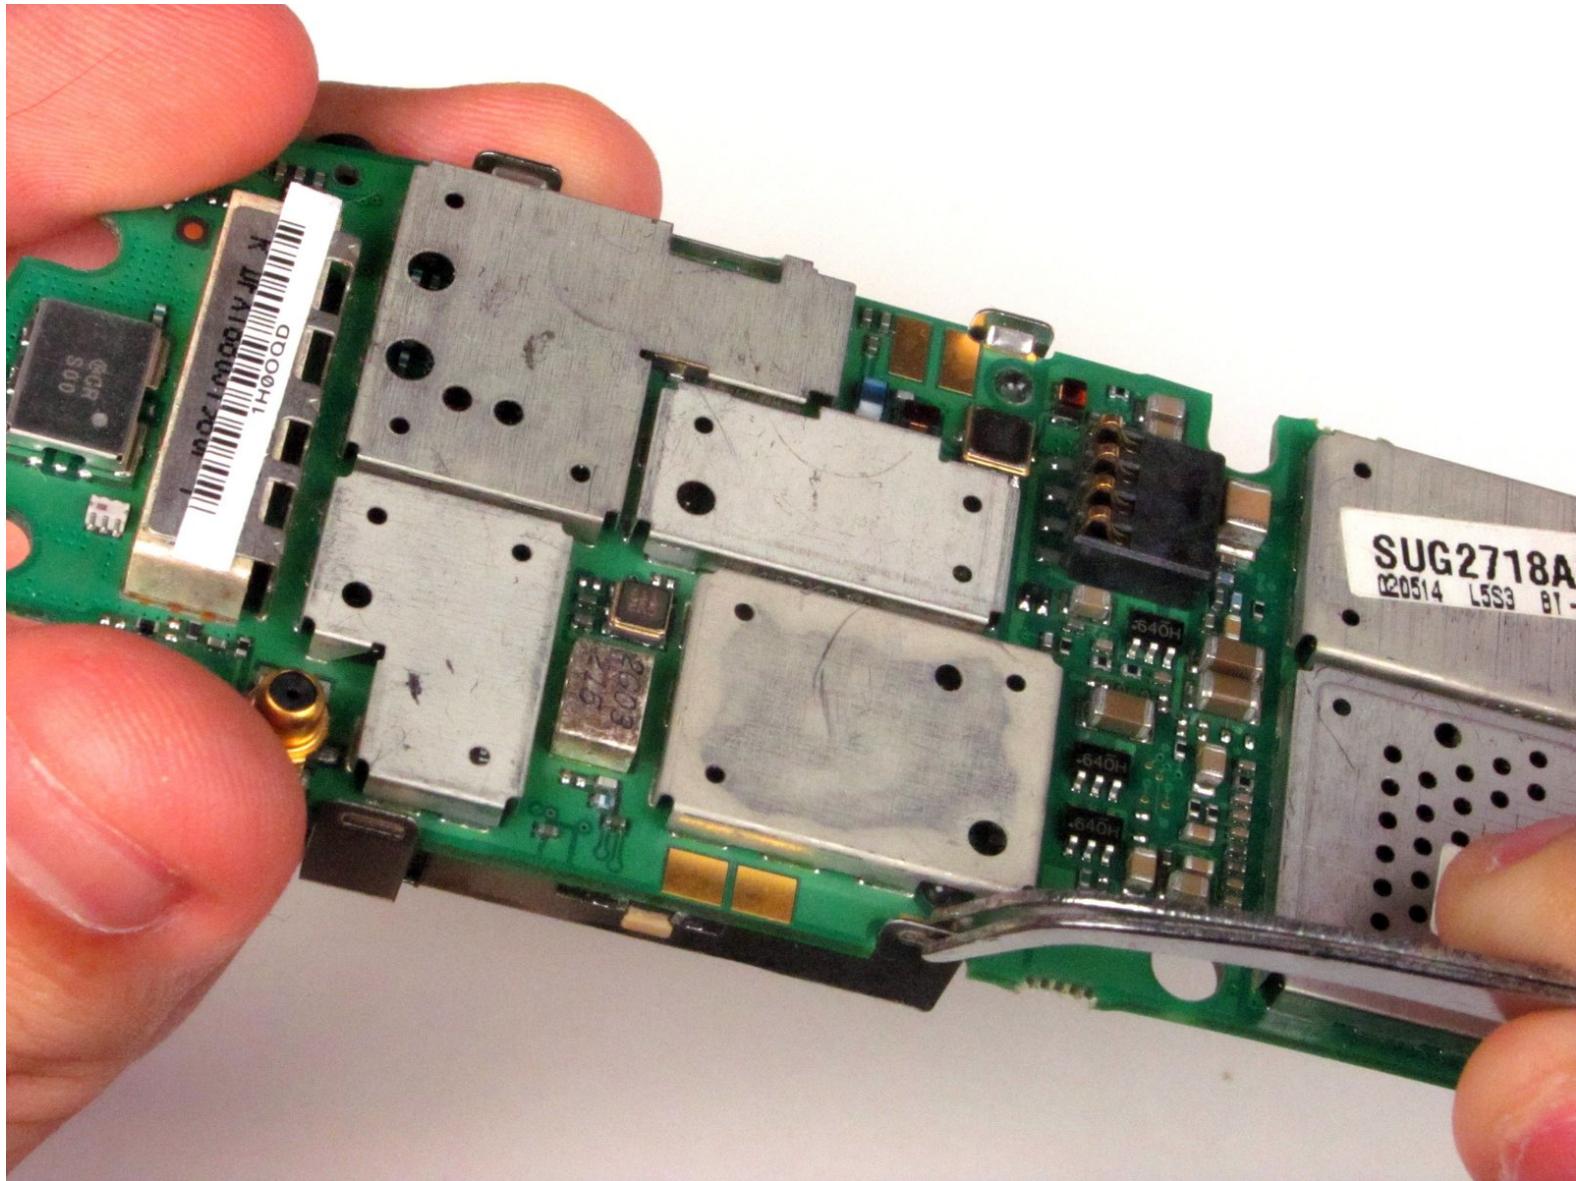

## INTRODUCTION

This process involves first removing the battery, outer case, and motherboard. After, the display can be removed from the motherboard.

### TOOLS:

- [Tweezers \(1\)](#)

## Step 1 — Battery



- Hold the phone and pull the back latch down towards the bottom.
- Remove the back panel by releasing the latch and lifting from the top.

## Step 2



- Remove the battery by pushing the bottom end towards the top, then lifting up.

## Step 3 — Motherboard




- Once the battery is out, unscrew the six 7.0 mm screws with T-6 screwdriver.
- Once the screws are removed, simply lift the back panel off

## Step 4





- Remove the motherboard by lifting it up and out.

## Step 5 — Display

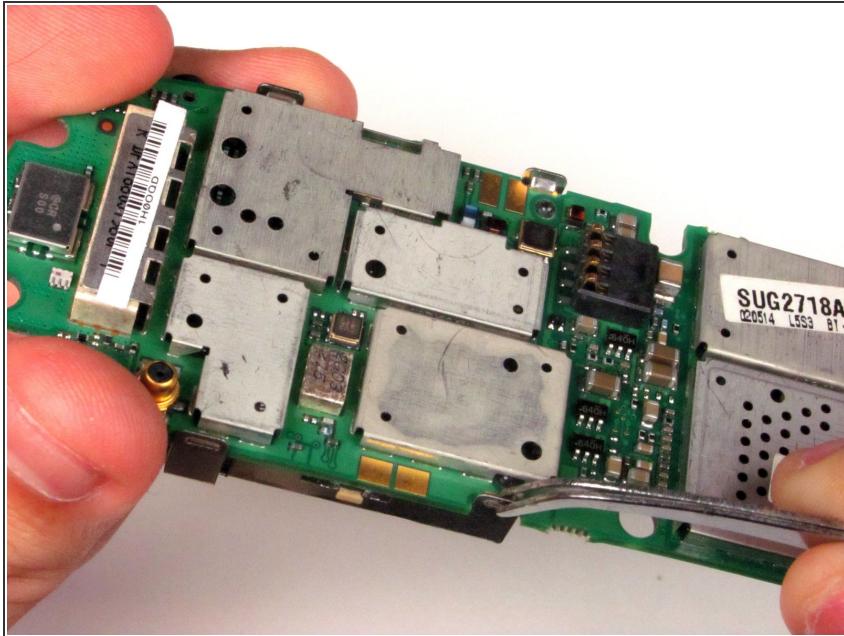

- Use tweezers to pry off the four clasps that hold the display in place.

## Step 6

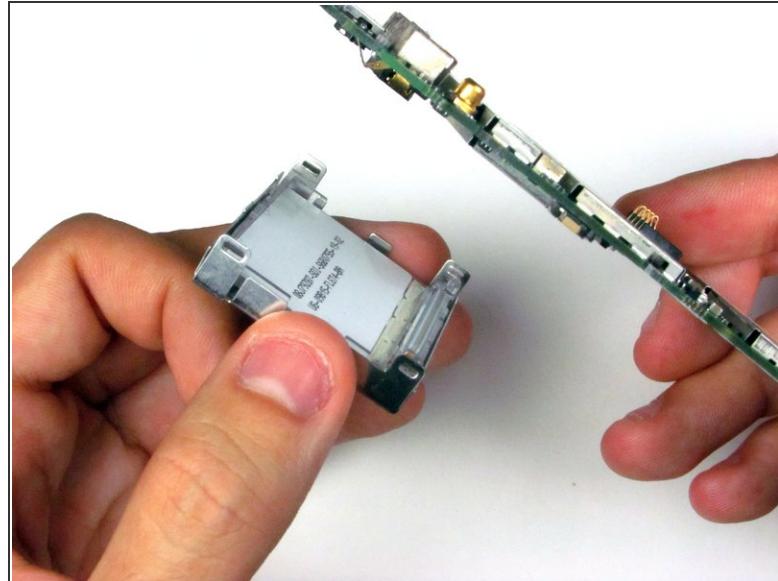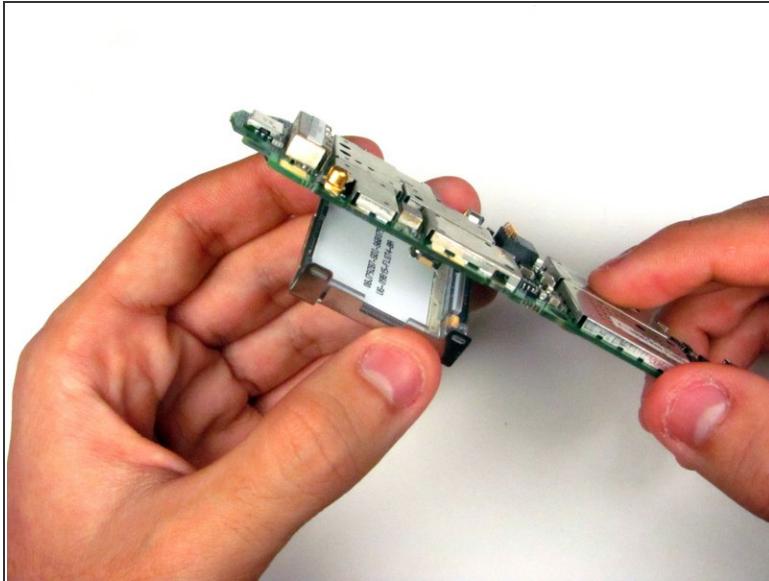

- Remove the display.

To reassemble your device, follow these instructions in reverse order.