



# Motorola Cliq Rear Speakers Replacement

Replace the rear speakers near the top of your Motorola Cliq.

Written By: Tony Tran



## INTRODUCTION

Too much Dubstep? Use this guide to replace a damaged or broken speakers on the Motorola Cliq. You will need to be ready to handle many small parts, including 4.0 mm screws and multiple small panels.

### TOOLS:

- [iFixit Opening Tools](#) (1)
- [Spudger](#) (1)
- [T4 Torx Screwdriver](#) (1)

## Step 1 — Battery



- Turning over your phone, place two fingers on the back cover and apply pressure away from the camera to slide the back cover off.

## Step 2




- Pinch the battery pull tab located below the camera, pull it upwards, and remove the battery.
- The pull tab may be tucked under the battery.

## Step 3 — Rear Casing



- Wedge a plastic opening tool behind the panel covering the camera, pry it up, and remove it using your fingers.  
*(i)* The panel is held down by adhesive and may require you to wedge and pry the right side of the panel before it can be easily removed.

## Step 4

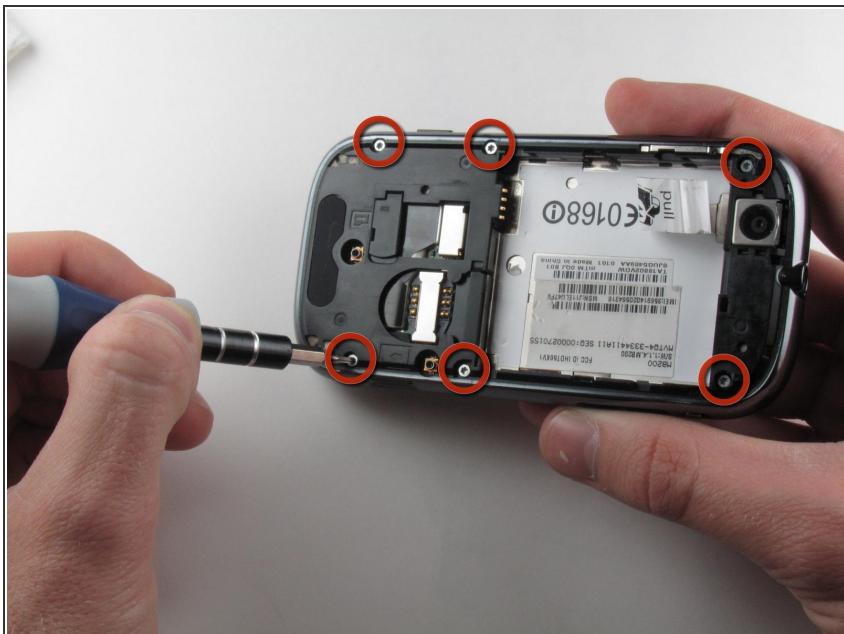

- Remove the six 4.0 mm T4 Torx screws which line the edge of the back of the phone.

## Step 5



- Turn the phone over and slide out the keyboard.
- Wedge a plastic opening tool where the keyboard meets the back casing of the phone next to the headphone jack.
- Carefully pry open the back casing along the keyboard's edge until at least two corners of the back casing are separated from the keyboard.


 Do not fully separate the rear panel from the phone. A cable is connecting the two parts together.

## Step 6



- Carefully separate the back casing from the rest of the phone.

## Step 7

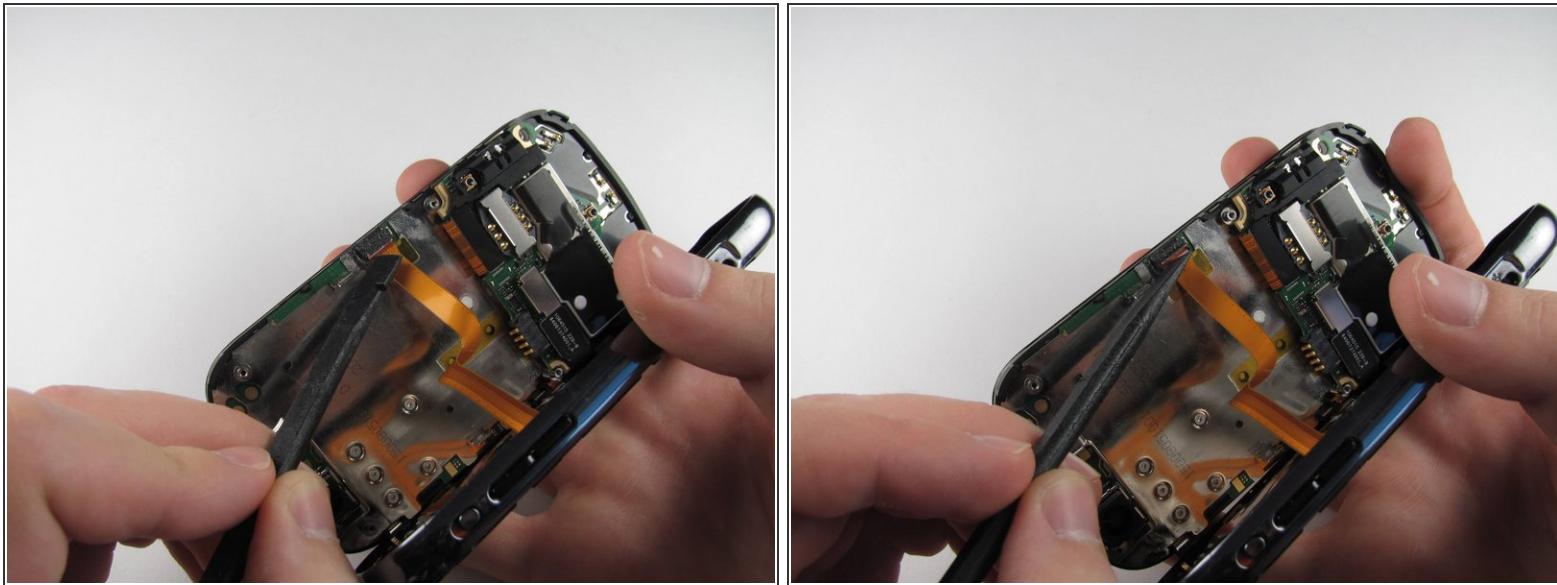

- Gently pry ZIF connector upwards using the flat end of a spudger tool.

! The ZIF connector is glued down. Be gentle! Ripping it off or breaking it will make your phone inoperable.



★ You may need adhesive to keep your power cable in place when reassembling your phone.

## Step 8



- Press your thumb against the orange power cable and pull it down slowly to disconnect the power cable from the bottom of the keyboard.
- The rear casing and the rest of the phone should now be completely separated.

## Step 9 — Rear Speakers

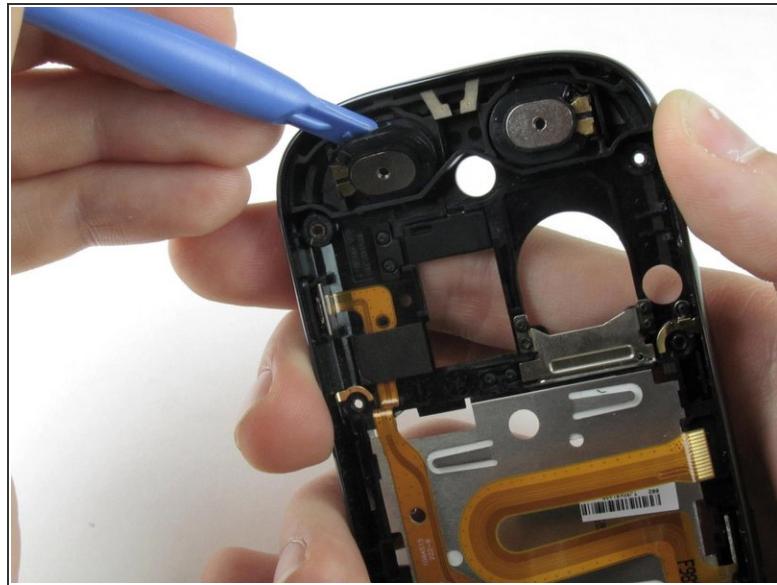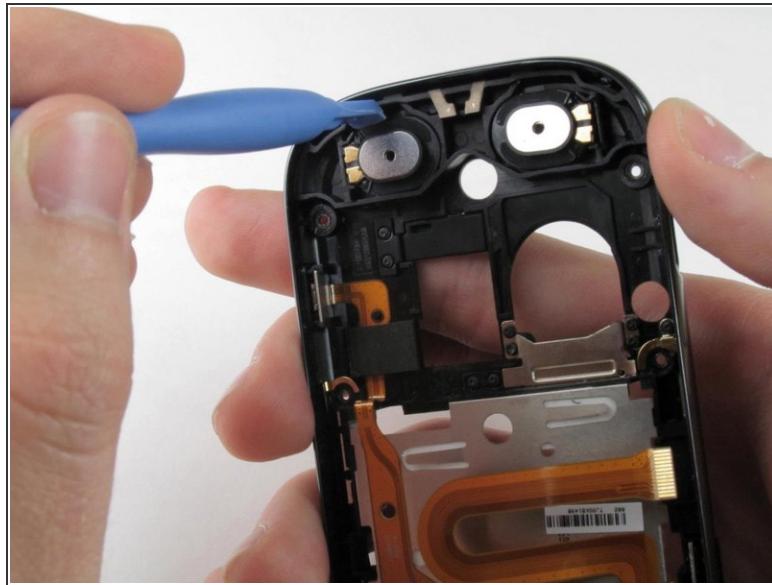

- Insert a plastic opening tool in the gap right above the speakers.
- Pry upwards to lift the speaker out of its bracket.

*(i)* The speakers are glued down and will cause a bit of resistance when prying.

**⚠** Do not pry anywhere else because it may lead to the bracket around the speaker to break.

## Step 10



- With your fingers, carefully remove the speaker.
- Repeat this process to remove the remaining speaker.

To reassemble your device, follow these instructions in reverse order.