



Motorola DROID RAZR MAXX Camera Cover Replacement

This guide will allow you to replace the broken or cracked camera cover with a new one.

Written By: Govind



This document was generated on 2019-09-23 09:01:16 AM (MST)



INTRODUCTION

The back cover may be made of Kevlar but the camera glass isn't, if it ends up breaking use this to help you replace it with a new one.

TOOLS:


- [iFixit Opening Tools \(1\)](#)

Step 1 — Camera Cover

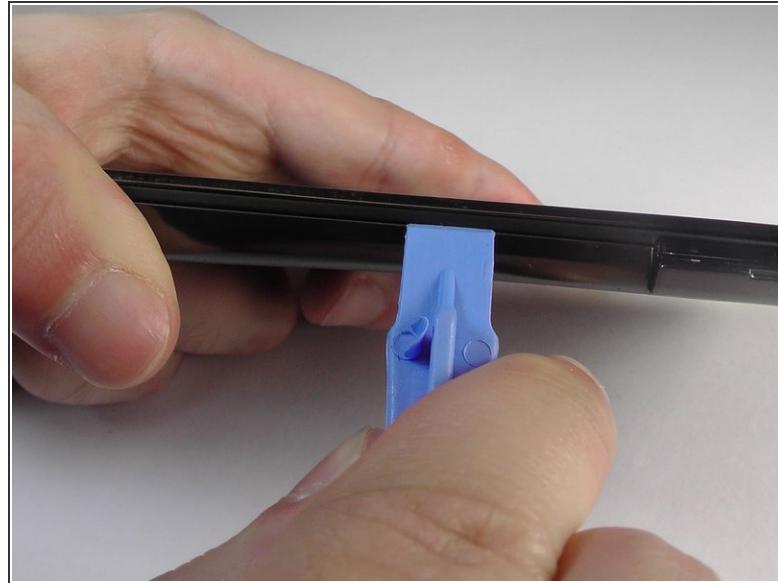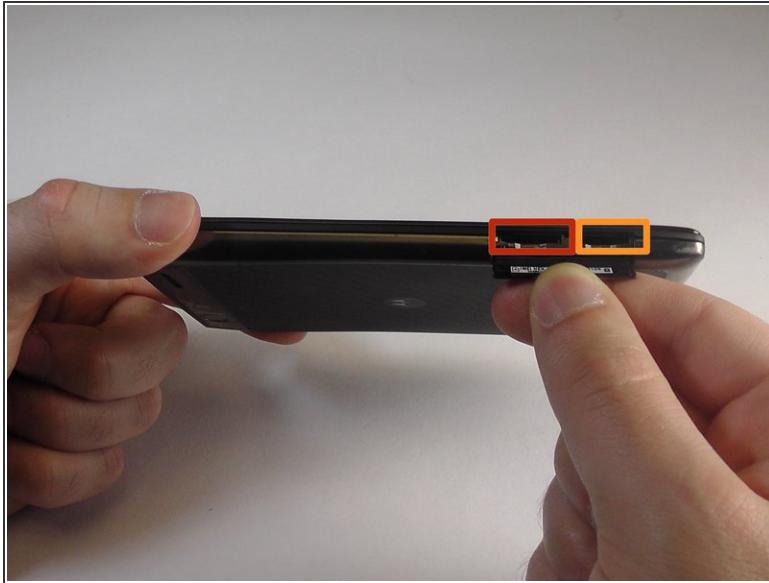

- Remove the SIM card.
- Remove the microSD card.
- Insert the plastic opening tool between the back cover and the front piece of the case, freeing the plastic clips between the phone.
- Do this along the back right side of the phone cover until you reach the top.

Step 2

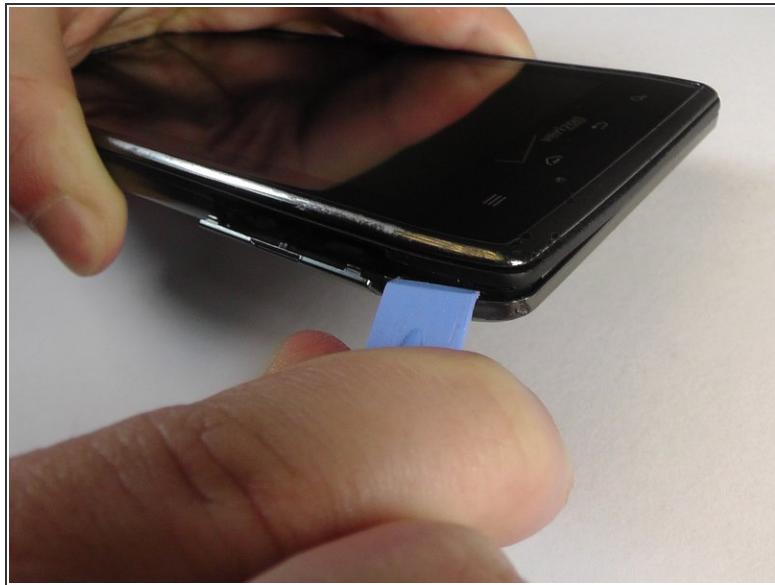

- Use the plastic opening tool to carefully work your way around the top of the phone, freeing the plastic clips.

! Be cautious when using the tool around the top of the device because the plastic case is very thin and could easily be cracked or snapped.

- Continue using the tool and pry down the remaining side and the bottom of the phone.

Step 3



- With all the plastic clips released, pull away the back cover from the phone to remove it.
- i* The back cover is attached to the battery with a large amount of adhesive. Some force may be required to pull the back cover from the phone.
- i* The back cover is very durable and will not break from some bending or pulling.

Step 4



- Looking at the top rectangular hump where the camera is located, use the plastic opening tool to remove the camera cover.
- Using the plastic opening tool, apply pressure into any surrounding crease of the camera cover to remove it.

To reassemble your device, follow these instructions in reverse order.