




Motorola Moto 360 2nd Gen Vibration Motor Replacement

This guide will instruct the user to replace the Vibration Motor in their Motorola Moto 360 2nd Gen device.

Written By: kushyal Budhan

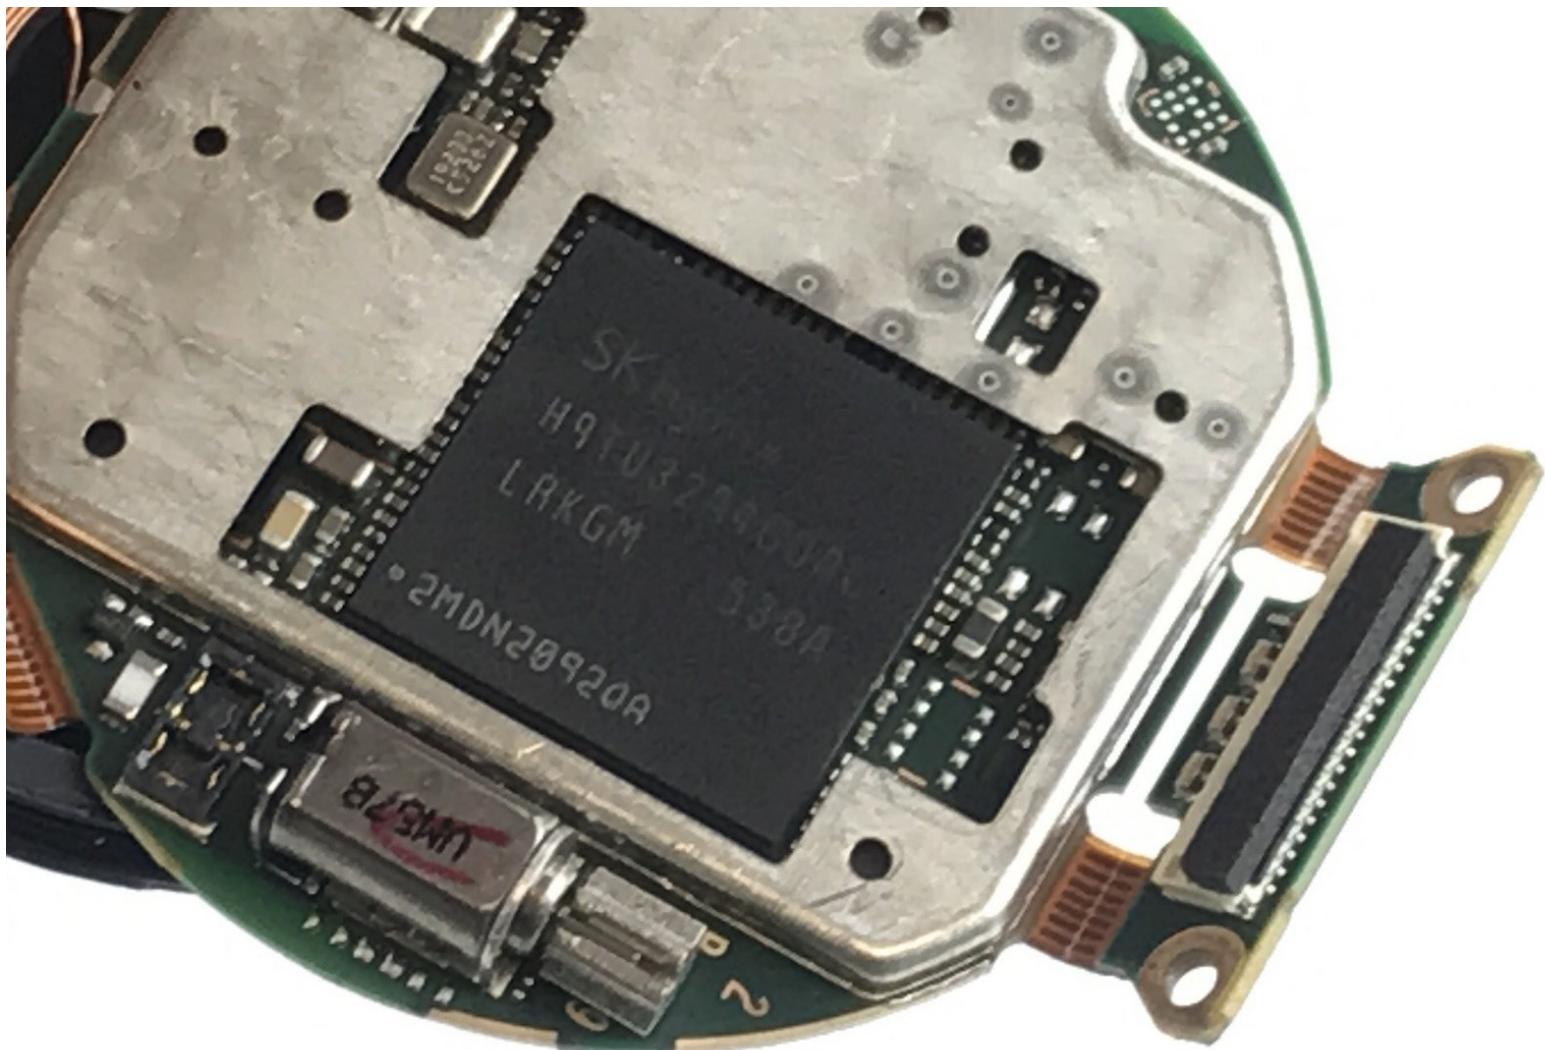

INTRODUCTION

Take care when handling the Moto 360 because it is very fragile. Also, take extreme caution when using tools. Use this guide to replace the vibration motor in your device.

TOOLS:

- [iOpener](#) (1)
- [Jimmy](#) (1)
- [Spudger](#) (1)
- [T3 Torx Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)
- [Tweezers](#) (1)

PARTS:

- [Vibrator Motor](#) (1)

Step 1 — Vibration Motor




- Set the watch face down on a flat surface.
- Place the heated iOpener on the face of the rear cover to loosen the adhesive underneath.

Step 2




- Carefully remove the inside of the watch.
- Carefully unscrew the two screw using the using the T3 Torx Screwdriver.

Step 3

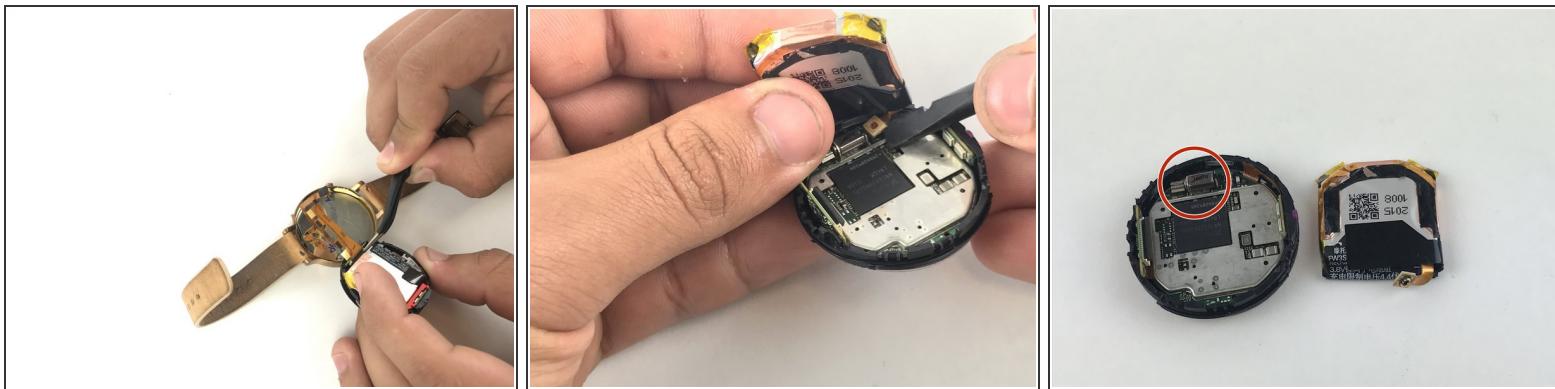


- Remove any connectors on the motherboard using the tweezers and spudger.
- Carefully remove the battery by disconnecting the connector.

Step 4

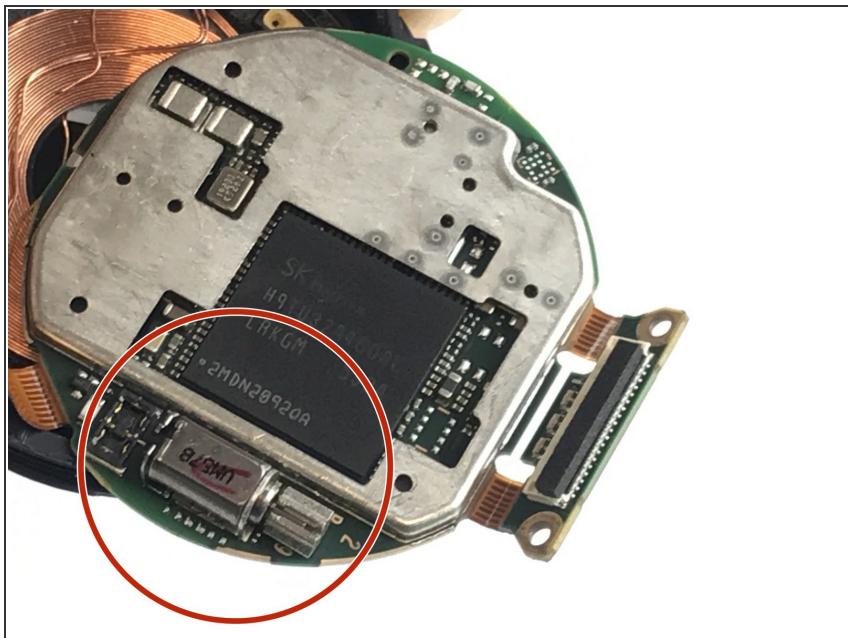

- After removing the battery the vibration motor will be visible.

Step 5

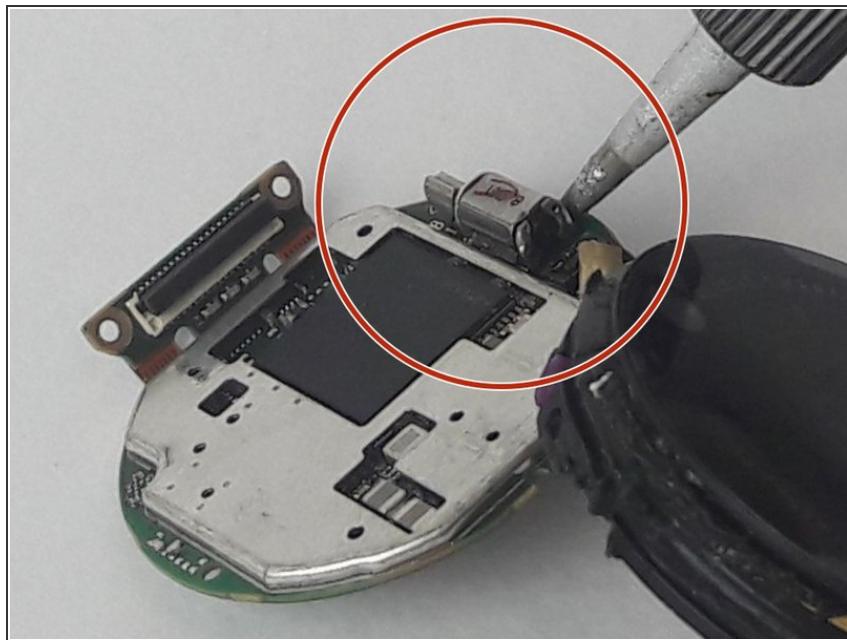

- Using a soldering iron, carefully remove the vibration motor by applying the tool under the vibration motor.

To reassemble your device, follow these instructions in reverse order.