




Motorola Moto E4 (XT1762) Motherboard Cover

This guide shows you how to remove the motherboard cover in the Motorola Moto E4 (XT1762).

Written By: Dominik Schnabelrauch

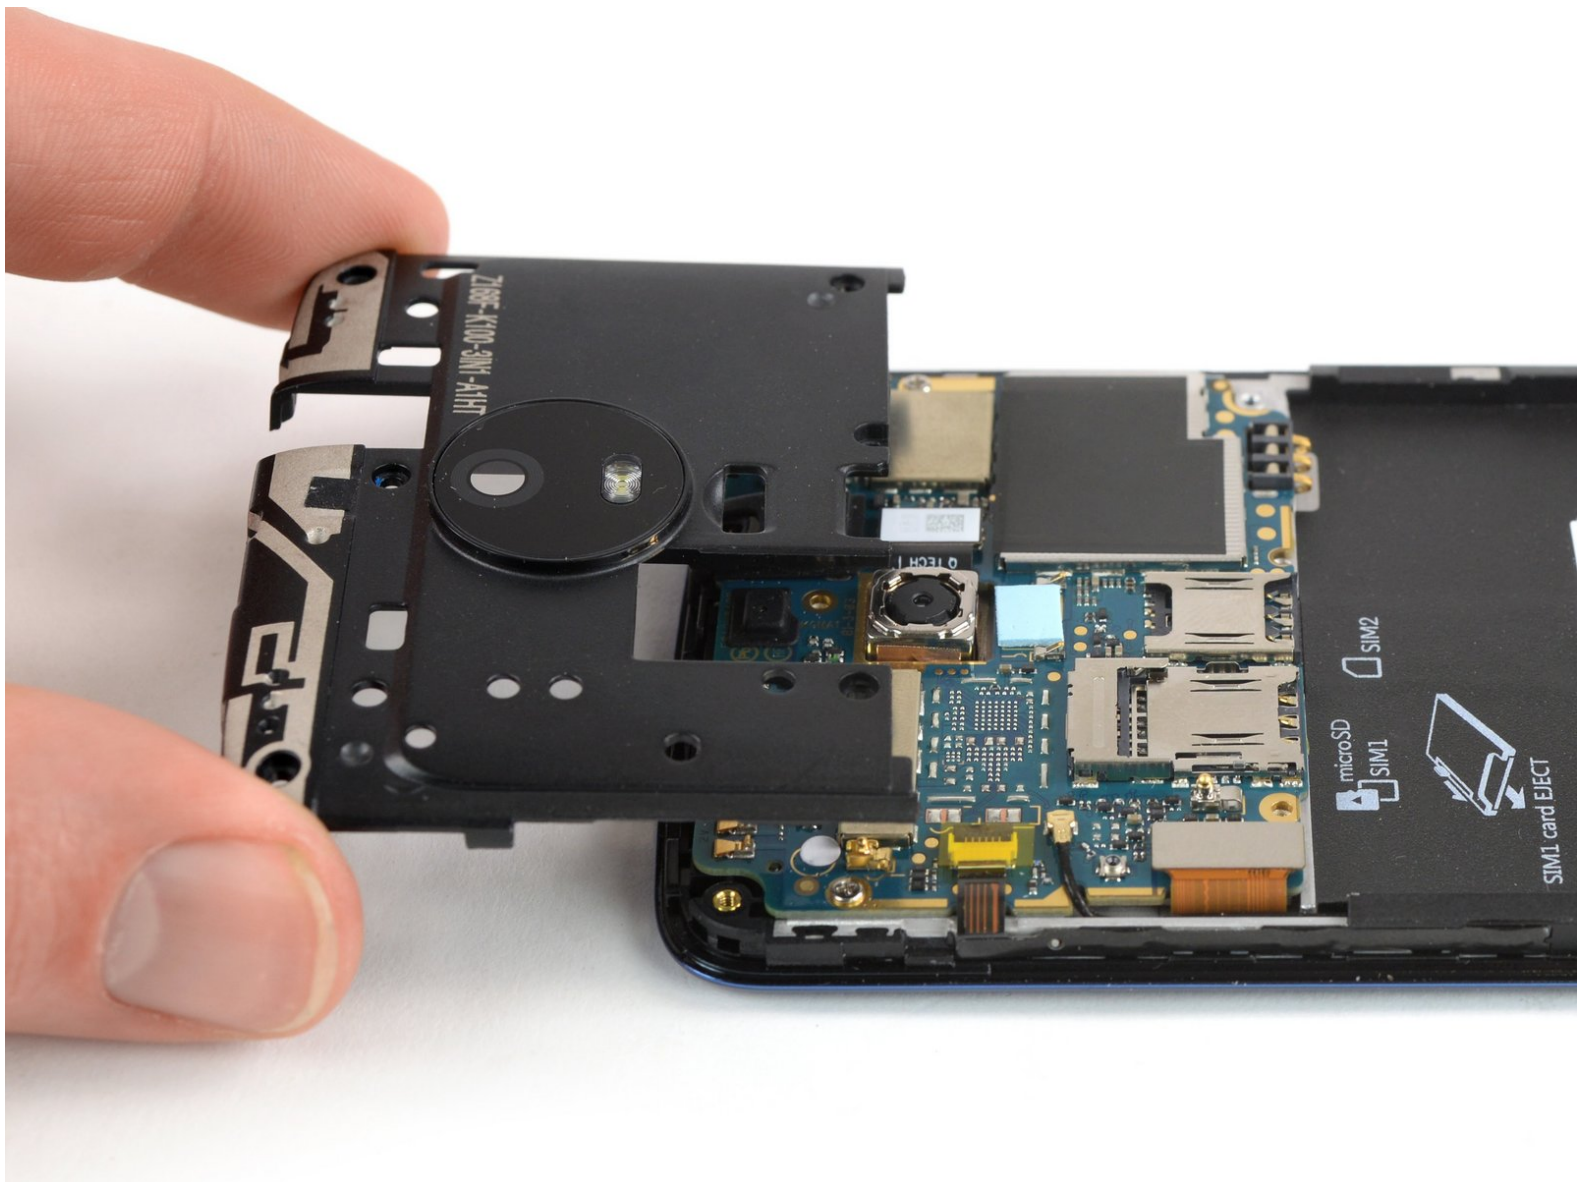

INTRODUCTION

Use this guide to remove the motherboard cover in the Motorola Moto E4 (XT1762).

TOOLS:

- [Spudger](#) (1)
 - [iFixit Opening Picks set of 6](#) (1)
 - [Phillips #00 Screwdriver](#) (1)
-

Step 1 — Back Cover



 Power off your phone before beginning disassembly.


- Insert a fingernail, or spudger, into the notch on the bottom right corner to start separating the phone unit from the back cover.
- Move to the bottom left corner to pry the phone out of the back cover.

Step 2



- Lift the phone out of the back cover.

Step 3 — Battery

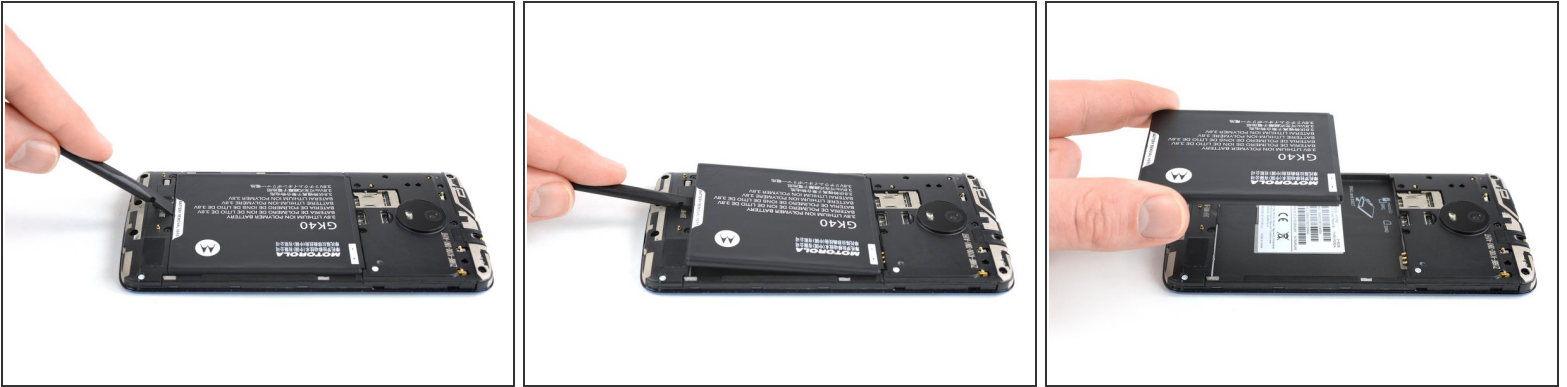

- Use a fingernail or spudger to pry at the notch at the bottom end of the battery.
- Lever the battery out of its recess and remove it.

Step 4 — Motherboard Cover




- Remove the seven 3.3 mm Phillips #00 screws.

Step 5




- Insert an opening pick between the cover and the motherboard at the bottom right corner.
- Slide the opening pick upwards to open the plastic clips.

Step 6

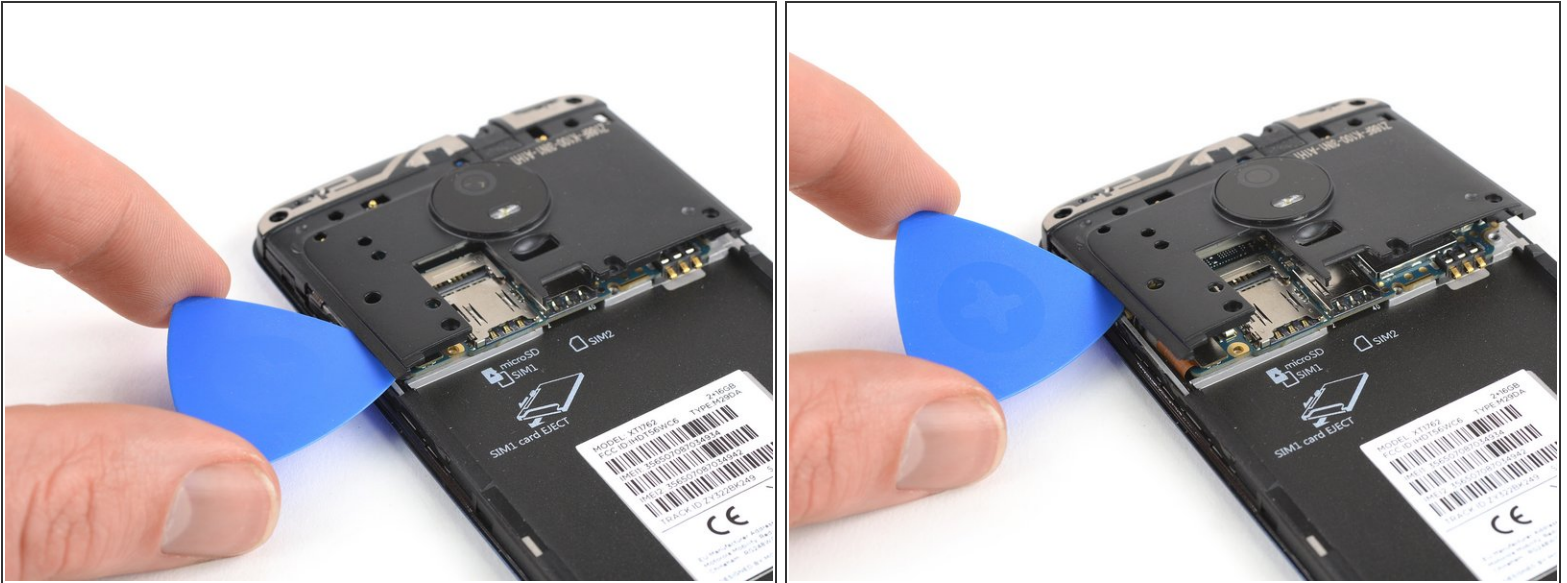

- Insert an opening pick between the cover and the motherboard at the bottom left corner.
- Slide the opening pick upwards to open the plastic clips.
- Pry up the motherboard cover by twisting the opening pick.

Step 7

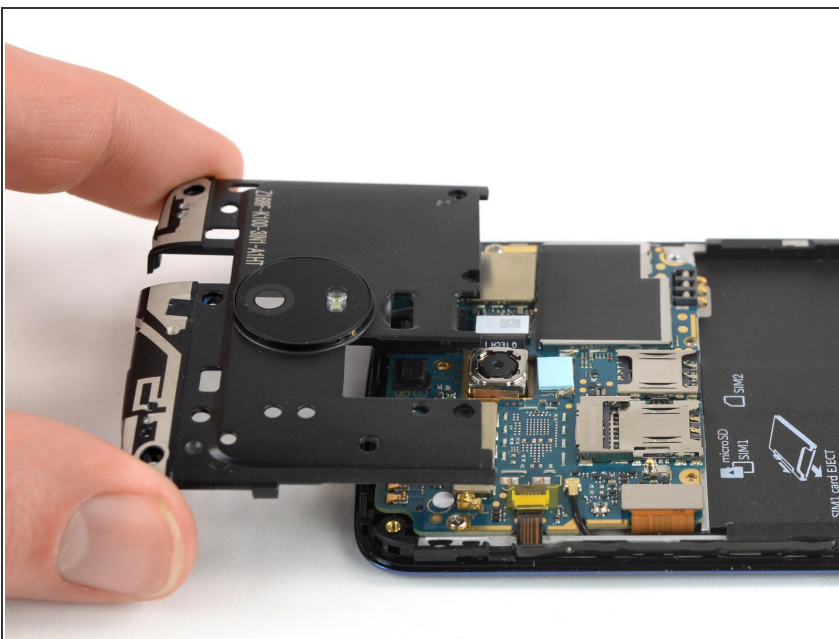

- Remove the motherboard cover.

To reassemble your device, follow these instructions in reverse order.