



Motorola Moto G 1st Generation Battery Replacement

An easy step-by-step guide for replacing your battery with minimal efforts.

Written By: Radostin Lobodov



 **TOOLS:**

- [iFixit Opening Tools \(1\)](#)
- [T5 Torx Screwdriver \(1\)](#)
- [Tweezers \(1\)](#)

Step 1 — Rear Panel



- **(i)** Before you start following any of the steps of this guide, completely turn the device off.
- Take the plastic back cover off by either using a plastic Pry tool or simply using your hands. Start from the bottom by the charging port

Step 2 — Removing the Screws



- Unscrew the 3.5mm screws, total of 14, located on the back protective cover by using a T5 Torx screwdriver.

Step 3 — Battery Cover




- Use a plastic opening tool to remove the protective cover.

⚠ Carefully work the plastic tool around all the edges of the phone.

i The protective cover holds the **Volume** and the **Home** buttons which might fall off the assembly when the cover is removed.

Step 4 — Disconnecting the Battery

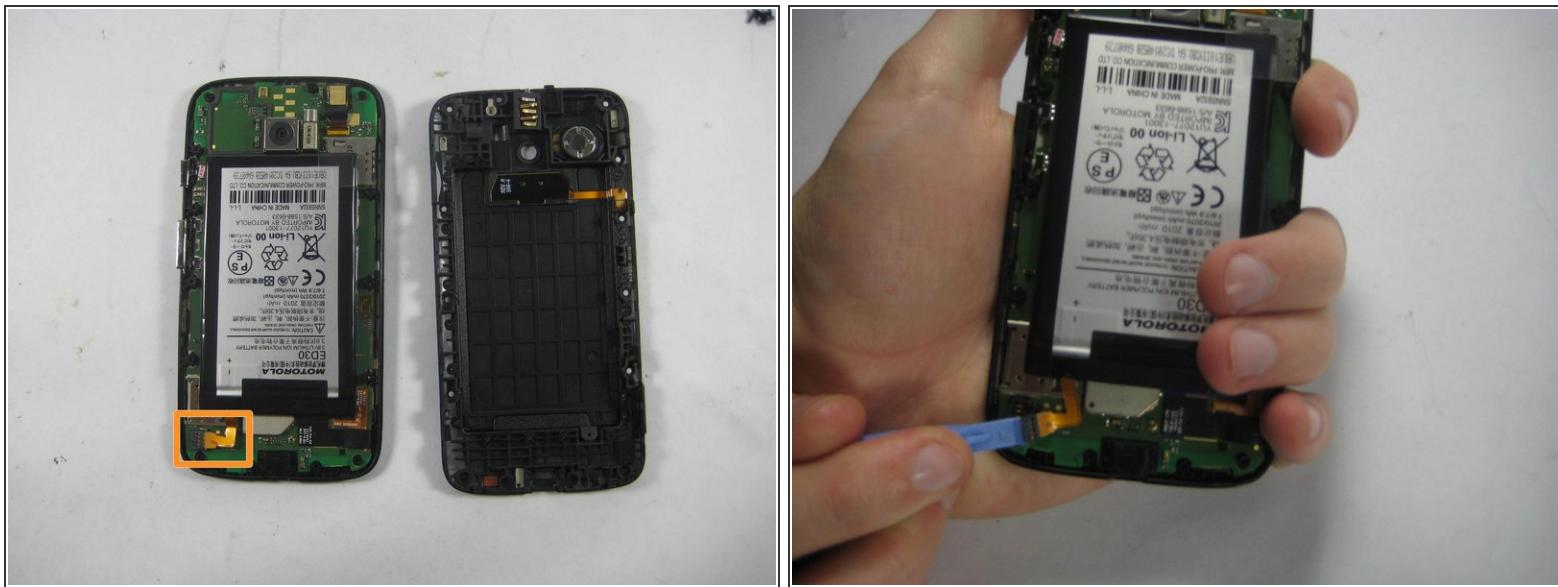

- Disconnect the connection between the Battery and the Mother Board by using the Pry tool.

Step 5 — Removing the Battery



- With the battery already disconnected, work around its edge with the pry tool to remove it from the assembly.

⚠ The battery is attached with a sticker, so it may take some work to pry up. Just work at it slowly and carefully until you get it.

To reassemble your device, follow these instructions in reverse order.