



Motorola Moto G 2nd Generation LCD Screen Replacement

Written By: idea



INTRODUCTION

[video: <https://www.youtube.com/watch?v=cohYFqRjr14>]

TOOLS:

- T5 Torx Screwdriver (1)
- Spudger (1)
- Heat Gun (1)
- iFixit Opening Picks set of 6 (1)

PARTS:

- Moto G2 LCD screen (1)

Step 1 — LCD Screen




- Remove back cover, SIM card, and SD card (if applicable)

Step 2



- Remove back frame. Be sure to remember where the screws go; they are different sizes

Step 3

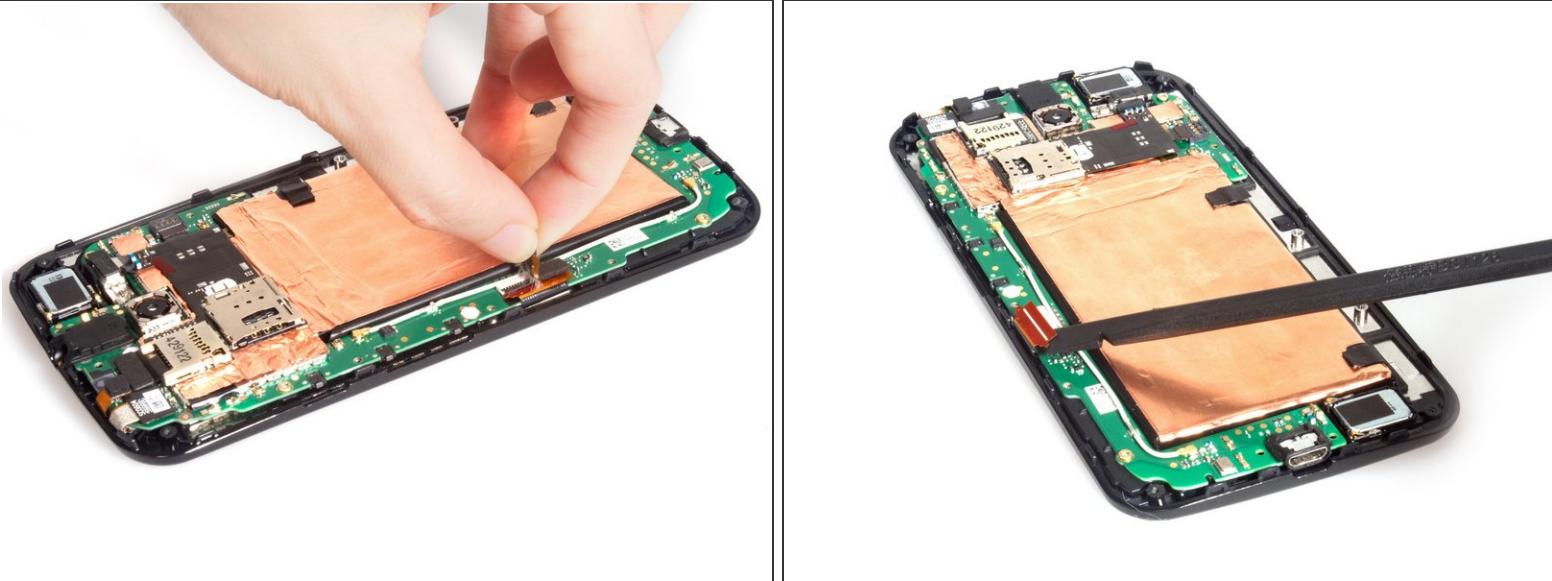

- Release LCD screen connector.

Step 4



- Remove the screen.

To reassemble your device, follow these instructions in reverse order.