



Motorola Moto G 2nd gen. 2014 Battery Replacement

Written By: Sophia



 **TOOLS:**

- [T5 Torx Screwdriver \(1\)](#)
- [Spudger \(1\)](#)
- [Tweezers \(1\)](#)

Step 1 — Battery and SIM&SD Card Reader



- Remove back cover.

Step 2




- Unscrew 14 screws and remove the back frame.

Step 3



- Release SIM & SD card reader assembly connector and battery connector. Get loosen the vibrator.

Step 4

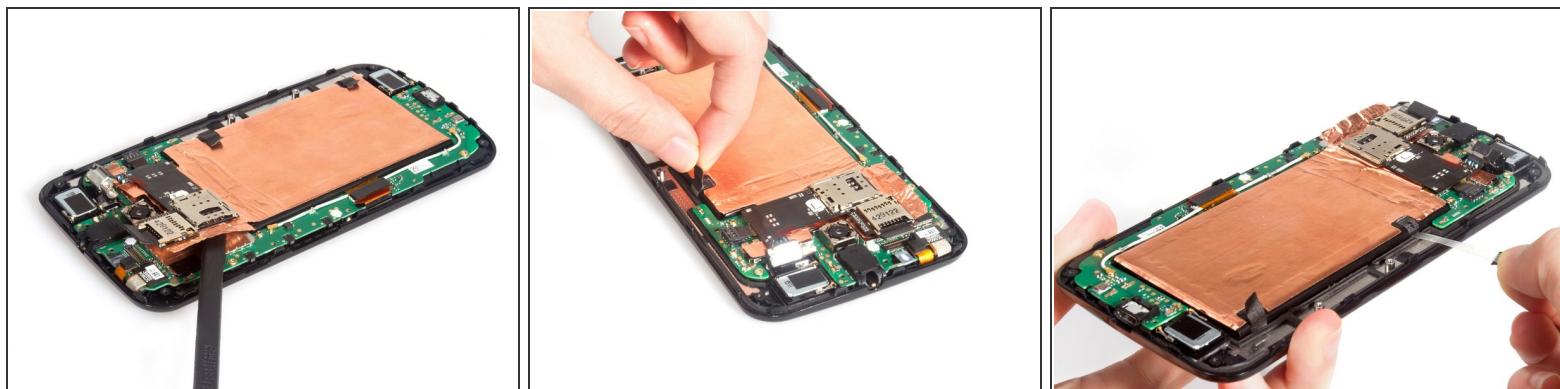

- Loosen kinds of stickers fastening card reader assembly and battery.

Step 5



- Remove the battery with card reader assembly together at first. And then separate them. The battery flex is stuck on the back of the card reader assembly.

Step 6



- The battery can be replaced now.

To reassemble your device, follow these instructions in reverse order.