




Motorola Moto X 2nd Generation Front Camera Replacement

Written By: Sophia

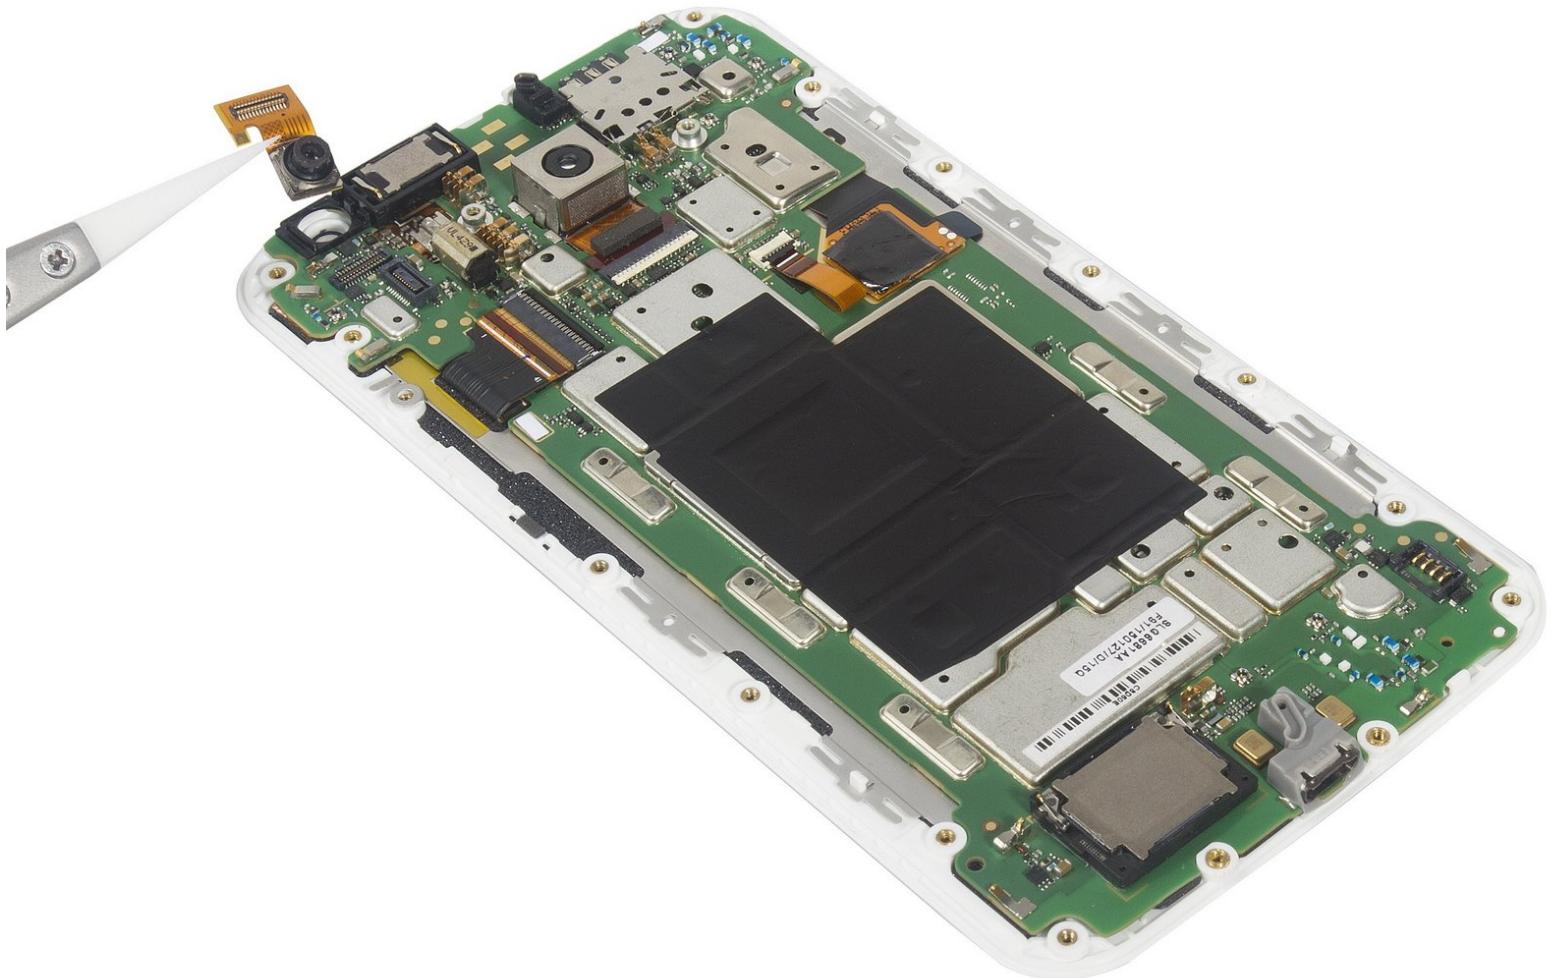

 **TOOLS:**

- [T3 Torx Screwdriver \(1\)](#)
- [iFixit Opening Picks set of 6 \(1\)](#)
- [Spudger \(1\)](#)

Step 1 — Front Camera



- Remove SIM card tray. Remember to power off the phone at first.

Step 2



- Push the eject pin to open a gap and place a guitar pick into the gap.

Step 3



- Slide the guitar pick to cut the adhesive sticker and peel off the soft back cover carefully.

Step 4




- Remove those two pieces rubber cover.

Step 5



- Release power button connecting flex connector and battery connector.

Step 6

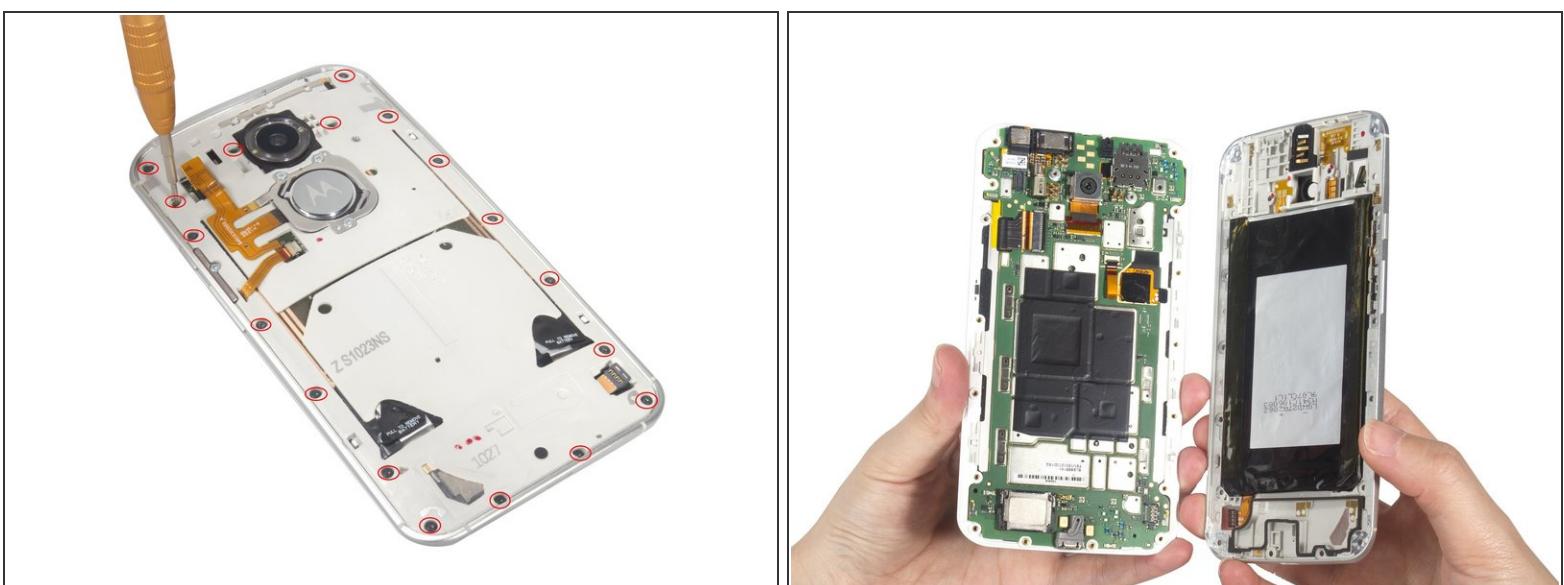

- Twist off all 18 black torx screws and remove middle housing from front assembly.

Step 7



- Release front camera connector and remove it.

To reassemble your device, follow these instructions in reverse order.