



Motorola Razr V3 Upper Casing Replacement

This guide will show you how to install the upper casing of the phone.

Written By: Ian Cottengim




INTRODUCTION

This guide will show you how to install the upper casing of the phone. This guide is necessary in order to remove the LCD screen or the call speaker.

TOOLS:

- [iFixit Opening Tools](#) (1)
- [T5 Torx Screwdriver](#) (1)
- [Tweezers](#) (1)

Step 1 — Battery

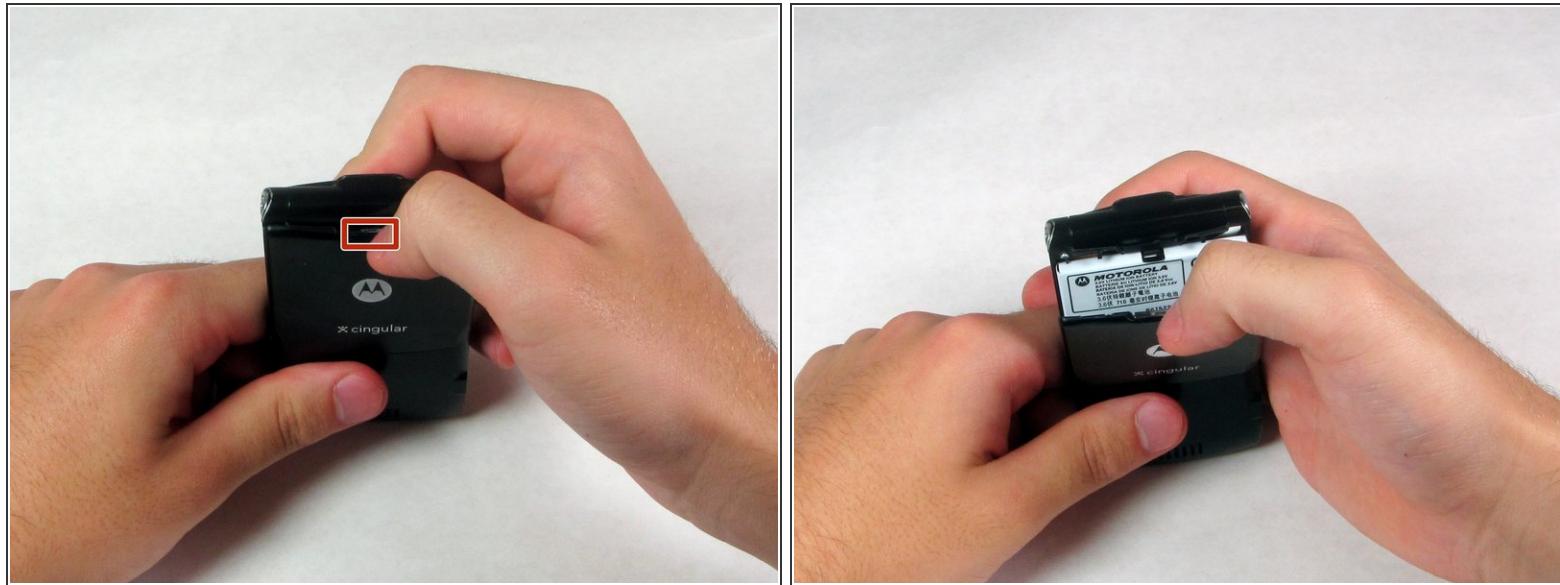

- Remove the back cover by pressing down the silver button.
- Pull the cover away from the phone.

Step 2



- Remove the battery by pushing down on the top and pulling it away from the phone, similar to the cover.

Step 3 — Upper Casing



- Use tweezers to pry off all four rubber screw covers from the inside face, pulling them towards you.
- *i* Our phone is missing the two left screw covers, be careful not to lose yours too!

Step 4



- Remove the four T5 Torx screws that were underneath the rubber covers.

Step 5



- Use the plastic opening tool to pry the top cover away from the phone.
- *(i)* The side buttons on the phone may fall out when the top cover is separated from the phone. They can easily be put back by placing them in their original spot.

To reassemble your device, follow these instructions in reverse order.