




Motorola Razr V3m Antenna Replacement

How to replace the antenna on a Motorola Razr V3m

Written By: Daniel Simcock

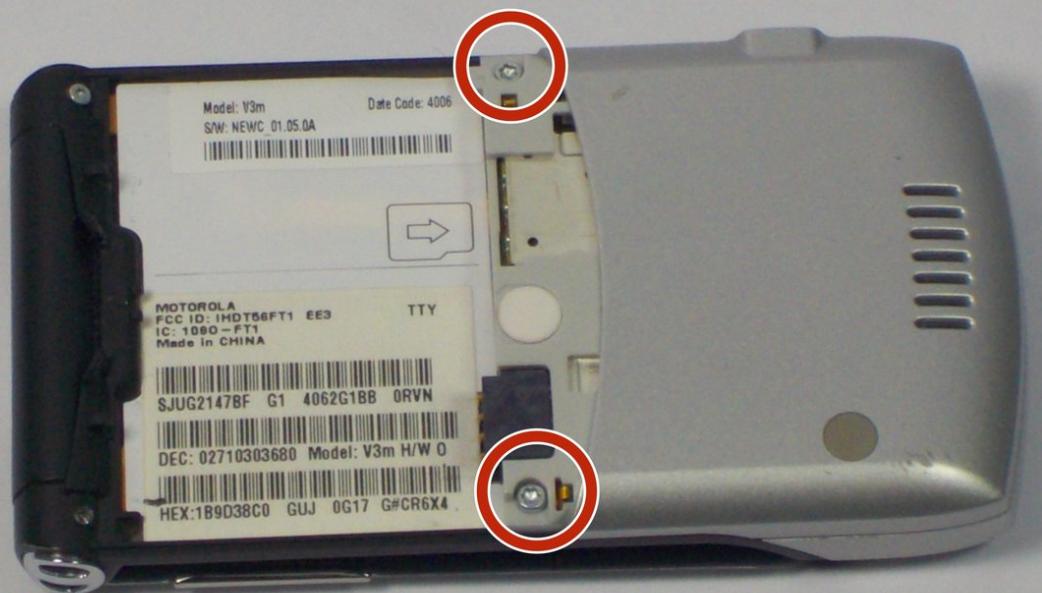

 **TOOLS:**

- [T6 Torx Screwdriver \(1\)](#)
- [Tweezers \(1\)](#)
- [iFixit Opening Tools \(1\)](#)

Step 1 — Battery



- Press the release button located on the upper edge of the battery cover. At the same time, lift the battery cover away from the phone.

Step 2



- Push the top edge of the battery and lift away from the phone.

Step 3 — SIM Card



- Gently pull the SIM Card toward the top of the phone with your finger.

Step 4 — Antenna



- Remove the two screws from the back panel with a T6 screwdriver.


Step 5



- Carefully use a plastic opening tool to pry back panel open.
- *(i)* The back panel is attached to the phone with a copper ribbon that acts as a hinge.
- Carefully open out the back panel to the side of the phone corresponding with the hinge.


⚠ Do not pull back away from phone. It may damage the copper ribbon.

Step 6

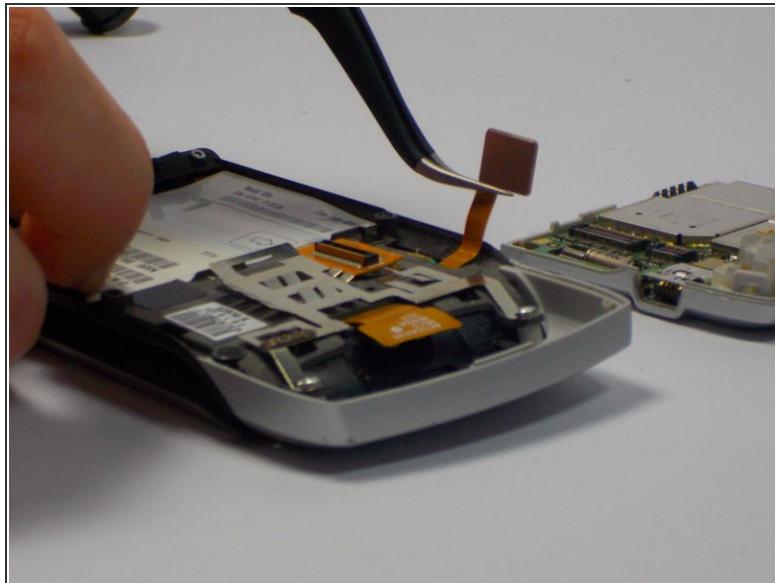



- Use tweezers to disconnect the copper ribbon from the inside of the back panel.

Step 7

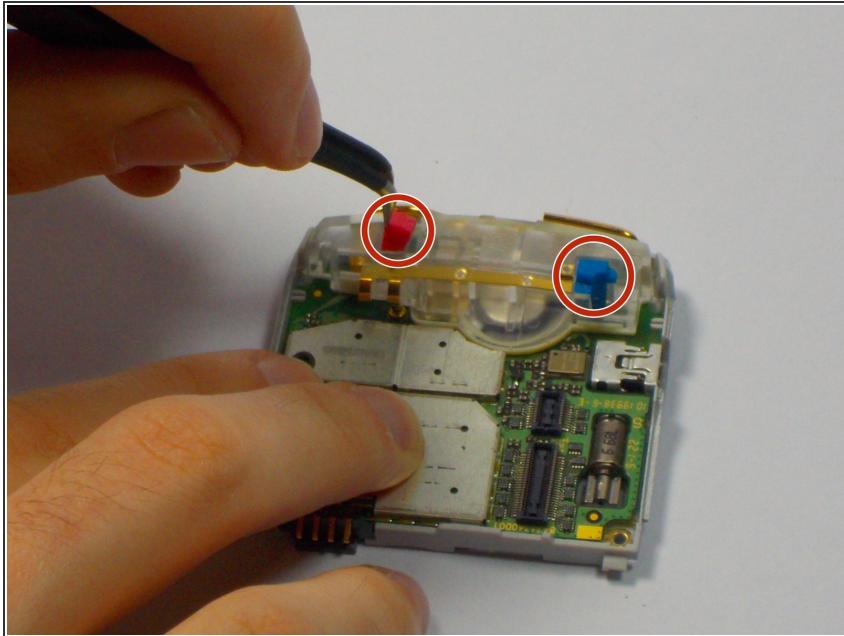

- Use tweezers to remove the tiny red and blue rubber covers located on the top of the antenna.

Step 8

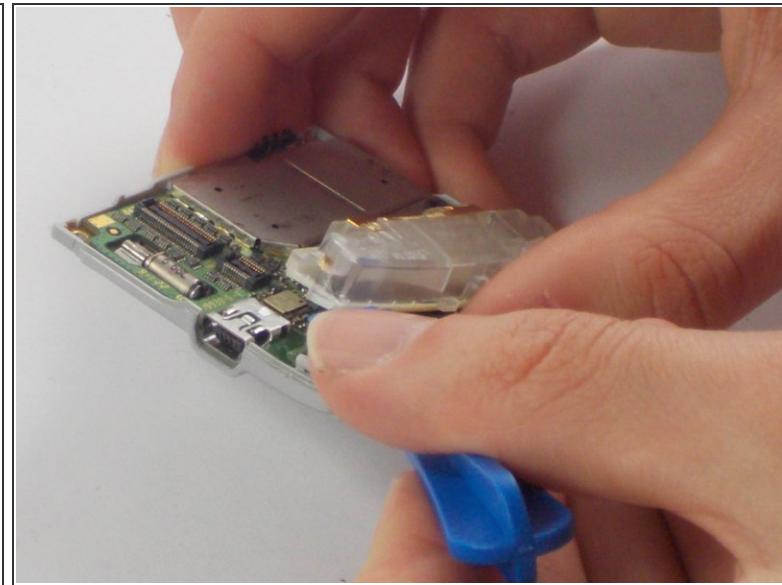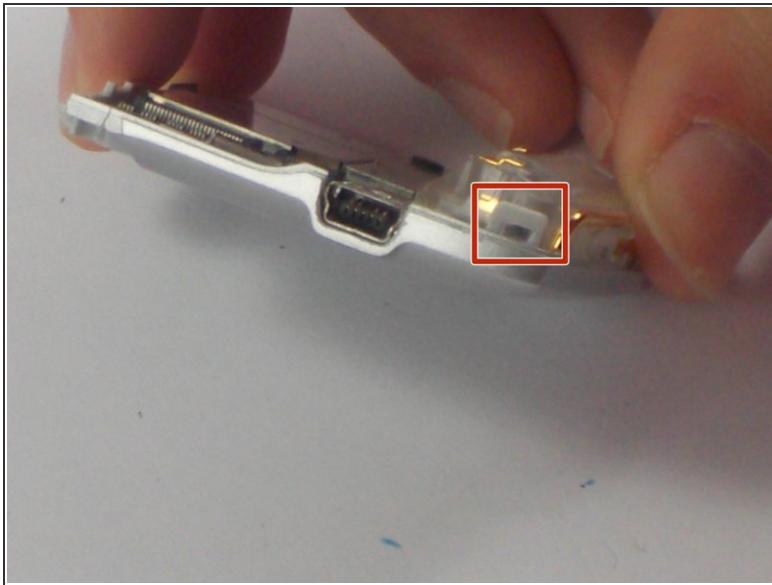

- Use a plastic opening tool to pry the edge of the antenna away from back panel.

(i) The antenna may be fastened with two grey clips on either side. If this is so, unfasten two plastic clips located on the edge of the antenna.

- Lift antenna away from back panel.

This document was generated on 2019-10-01 03:31:51 PM (MST).

To reassemble your device, follow these instructions in reverse order.