



# Motorola Razr V3m Screen/Camera Replacement

How to replace the screen and front facing camera.

Written By: Daniel Simcock



 **TOOLS:**


- [T4 Torx Screwdriver \(1\)](#)
- [Tweezers \(1\)](#)
- [Spudger \(1\)](#)
- [iFixit Opening Tools \(1\)](#)

## Step 1 — Battery



- Press the release button located on the upper edge of the battery cover. At the same time, lift the battery cover away from the phone.

## Step 2

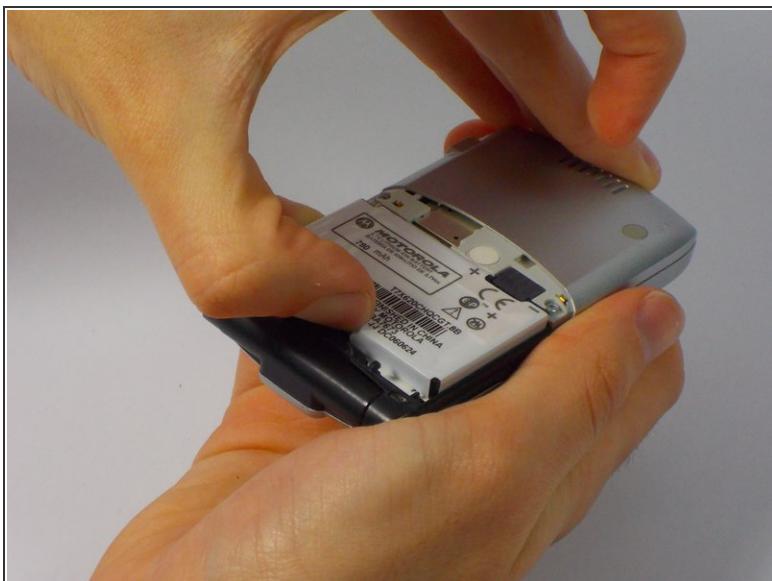

- Push the top edge of the battery and lift away from the phone.

## Step 3 — Screen/Camera




- Remove the 4 screws on the corners of the inside screen with the T4 screwdriver
- *(i)* The phone may have rubber plugs covering the screws of the inside screen. If so, remove the rubber plugs with a thin metal needle.

## Step 4




- Use a plastic opening tool to pry the external shell off of the phone.
- **⚠** Use care when doing this step because you don't want the external shell or the pieces inside the phone to break.

## Step 5

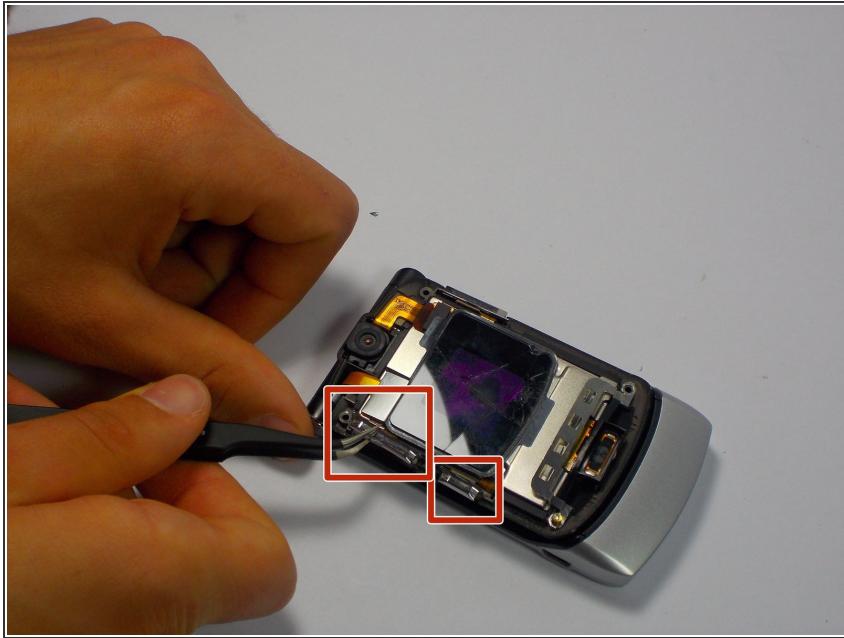



- Remove the two side buttons with tweezers.

## Step 6

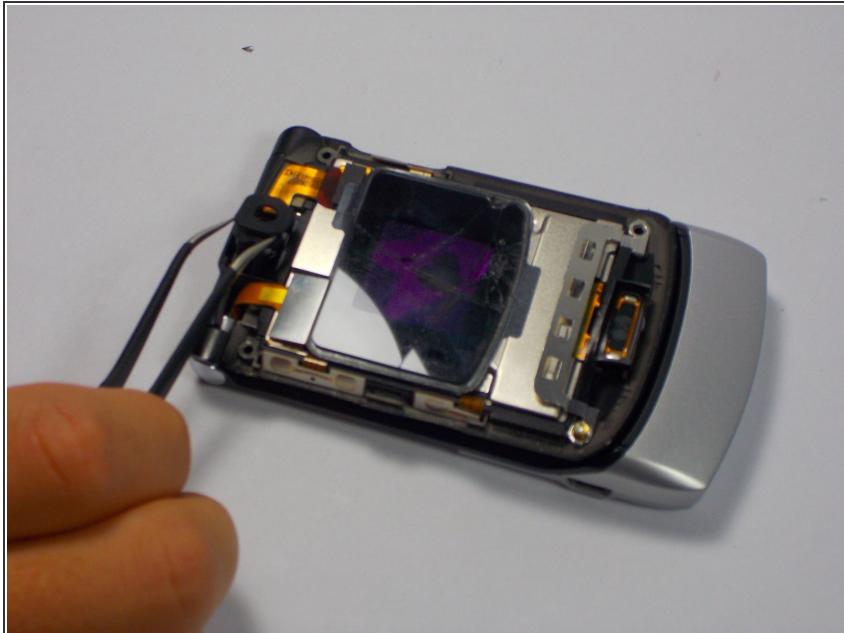

- Use tweezers to remove the circular magnetic ring covering the camera.

## Step 7

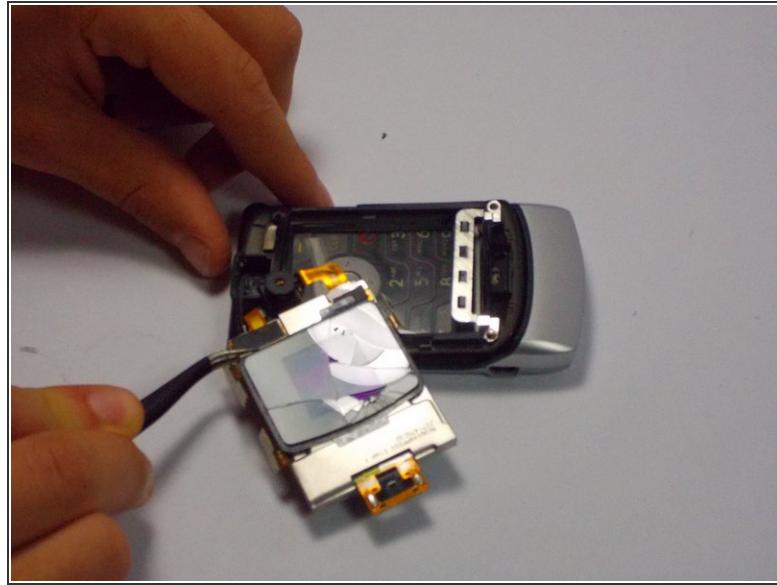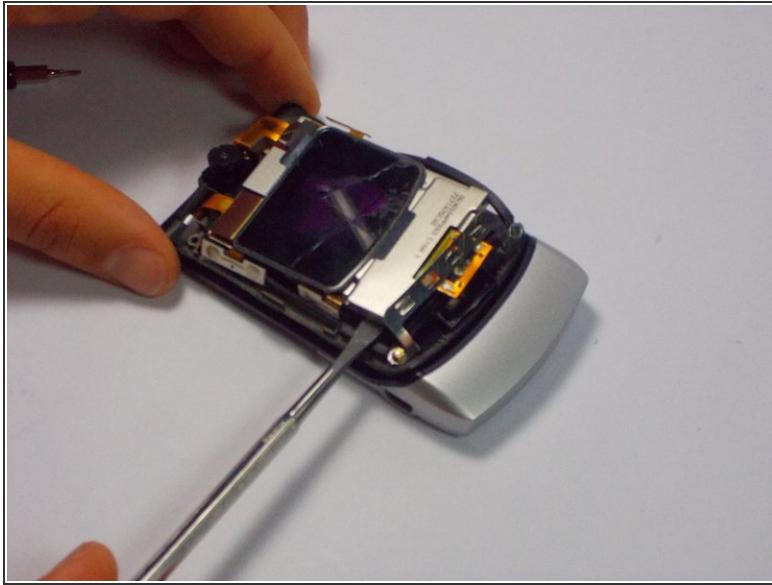

- Use a spudger to pry the screen from the inside front part of the phone.
- ⓘ You may choose to use tweezers to remove the screen instead.

To reassemble your device, follow these instructions in reverse order.