




Motorola Razr V3m Speaker Replacement

How to replace the speaker on the Motorola Razr V3m

Written By: Daniel Simcock

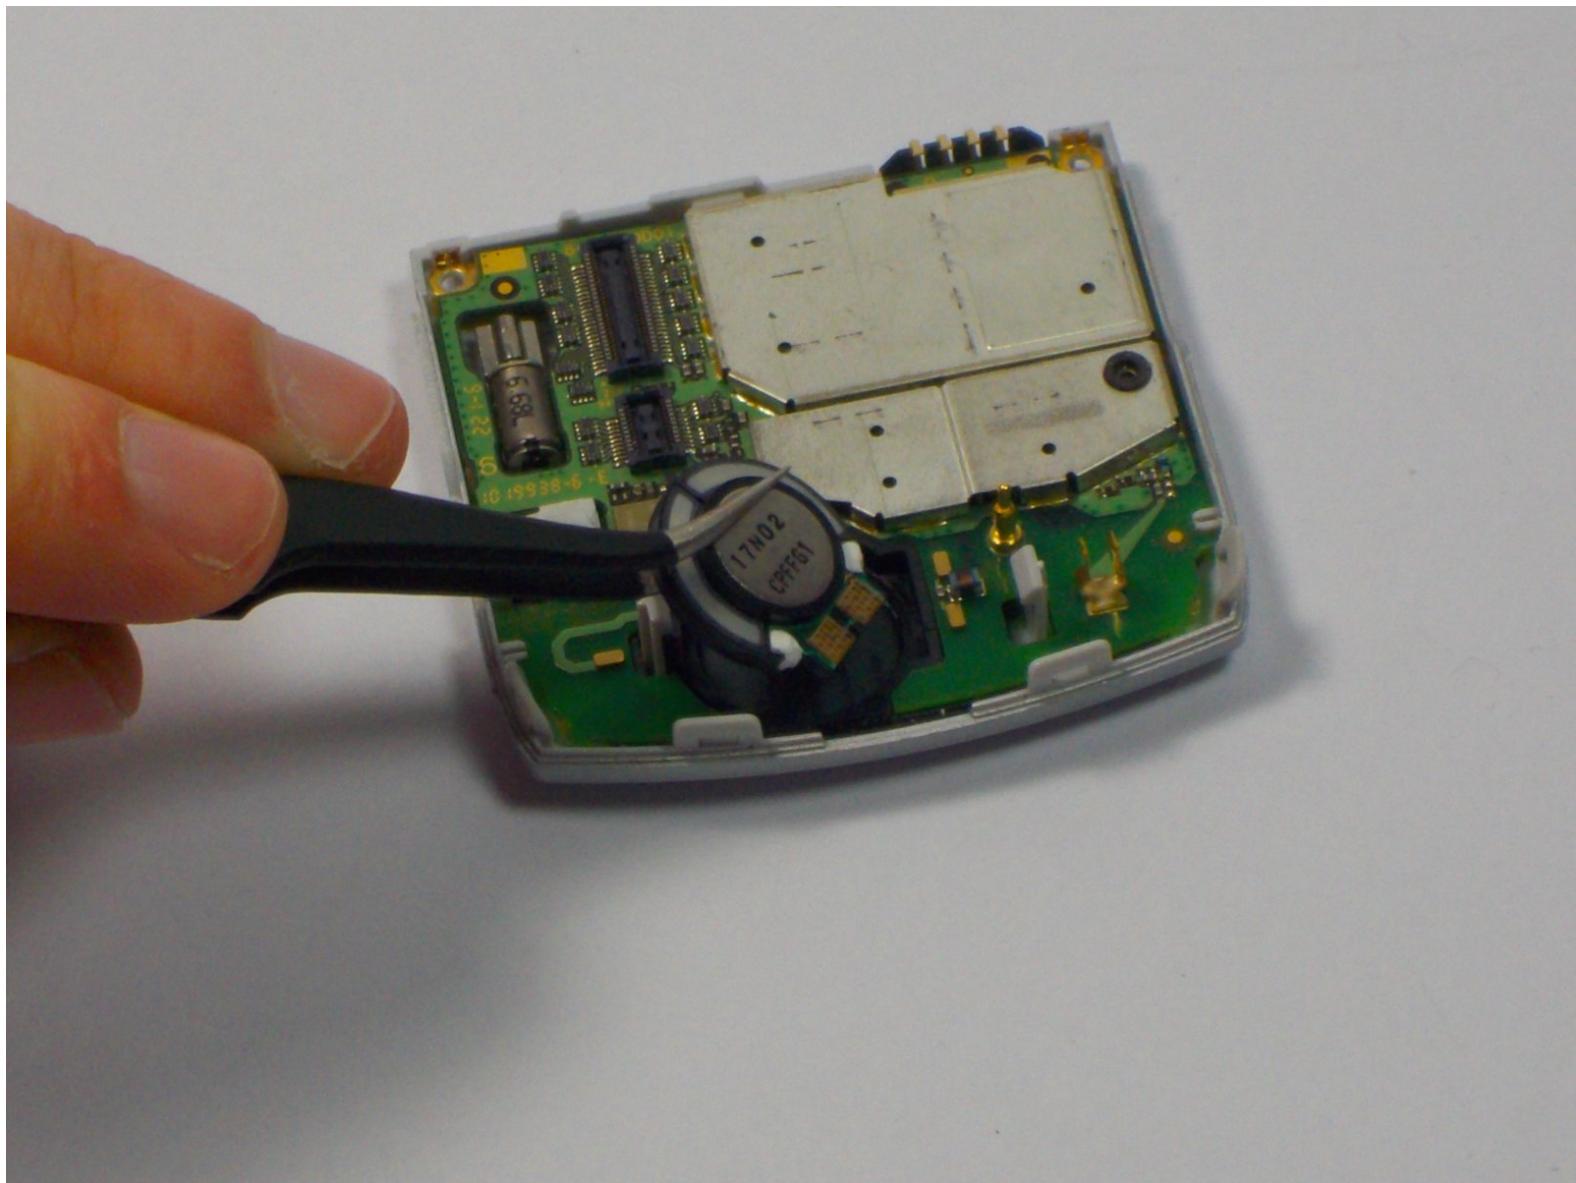

 **TOOLS:**

- [Spudger \(1\)](#)
- [T6 Torx Screwdriver \(1\)](#)
- [Tweezers \(1\)](#)
- [iFixit Opening Tools \(1\)](#)

Step 1 — Battery



- Press the release button located on the upper edge of the battery cover. At the same time, lift the battery cover away from the phone.

Step 2



- Push the top edge of the battery and lift away from the phone.

Step 3 — SIM Card



- Gently pull the SIM Card toward the top of the phone with your finger.

Step 4 — Antenna



- Remove the two screws from the back panel with a T6 screwdriver.


Step 5



- Carefully use a plastic opening tool to pry back panel open.
- *(i)* The back panel is attached to the phone with a copper ribbon that acts as a hinge.
- Carefully open out the back panel to the side of the phone corresponding with the hinge.


⚠ Do not pull back away from phone. It may damage the copper ribbon.

Step 6

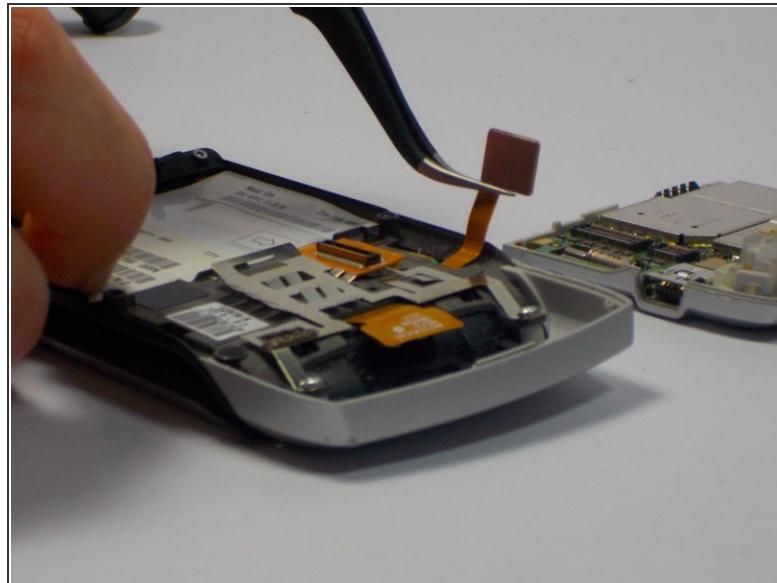



- Use tweezers to disconnect the copper ribbon from the inside of the back panel.

Step 7

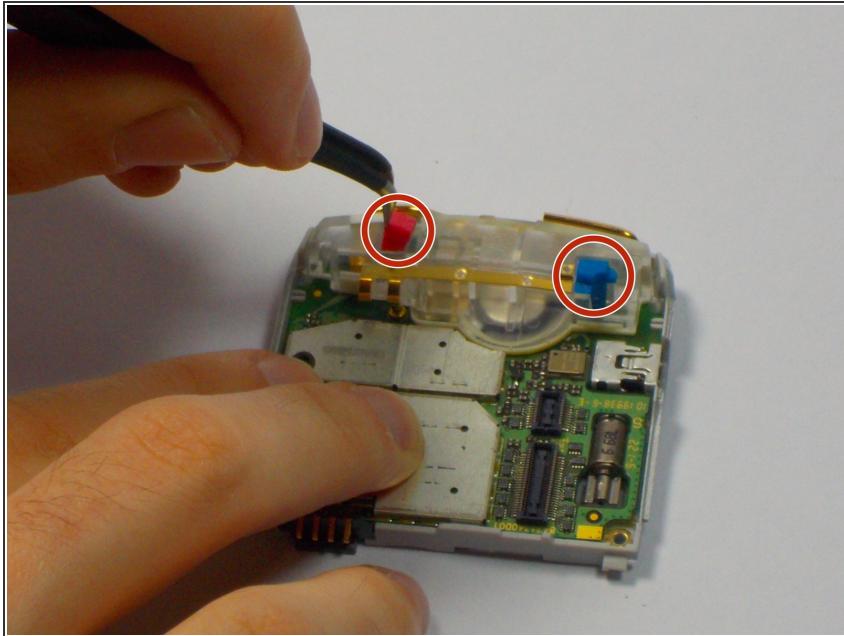

- Use tweezers to remove the tiny red and blue rubber covers located on the top of the antenna.

Step 8

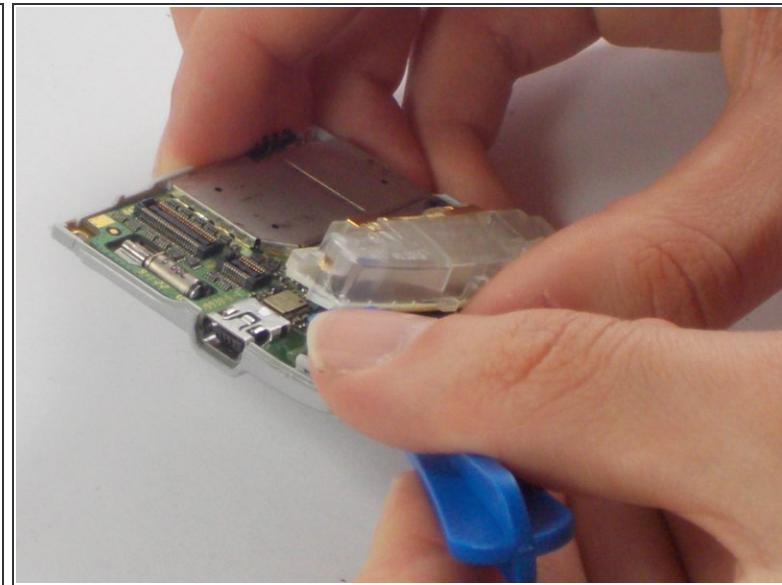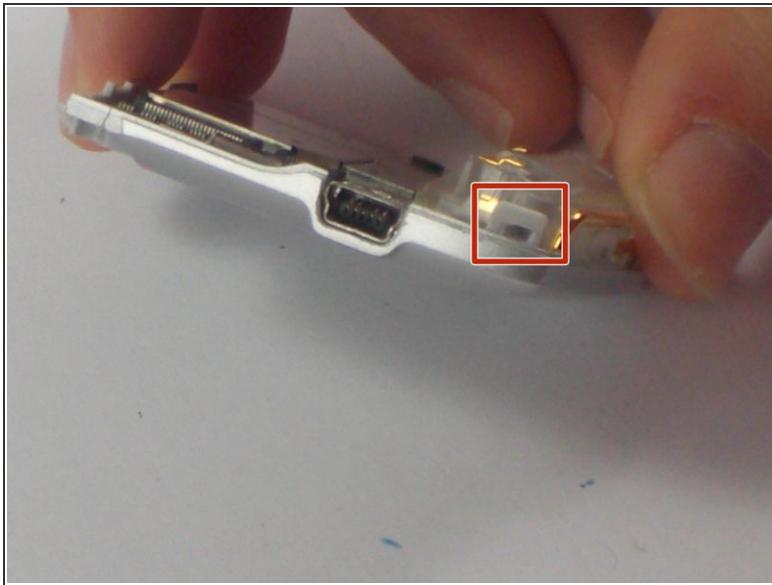


- Use a plastic opening tool to pry the edge of the antenna away from back panel.

ⓘ The antenna may be fastened with two grey clips on either side. If this is so, unfasten two plastic clips located on the edge of the antenna.

- Lift antenna away from back panel.

Step 9 — Speaker

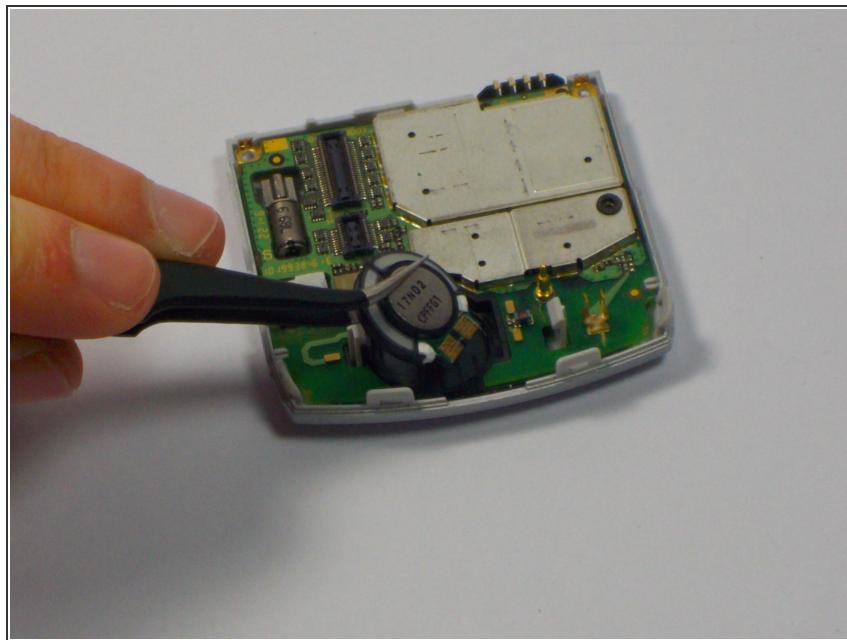

- ⓘ The Speaker is the round piece located beneath the antenna.
- Use tweezers to remove the speaker.

To reassemble your device, follow these instructions in reverse order.