



Motorola Triumph Camera Replacement

This will teach you how to replace your camera.

Written By: greg



INTRODUCTION

This guide details the process of removing the camera from an Motorola Triumph. Installation of the camera can be accomplished by reversing the process.

TOOLS:

- [T4 Torx Screwdriver](#) (1)
- [T5 Torx Screwdriver](#) (1)
- [Spudger](#) (1)

Step 1 — Battery



- Slide the back cover down.
- Lift the back cover up.
- Pry the battery out with the spudger

Step 2



- Pry the battery out using the spudger

Step 3 — Speakers



- After removing the Battery remove the two screws with a T4 screwdriver.

Step 4



- With the spudger, go around the seam of the phone and pry away the back chassis.

Step 5



- Using the T5 screwdriver, remove all the four screws shown in the picture.

Step 6



- Lift up the motherboard out of the device,

Step 7





- Pry the speakers out using the plastic spudger.

Step 8 — Camera



- Locate the camera at the top of the motherboard.

Step 9

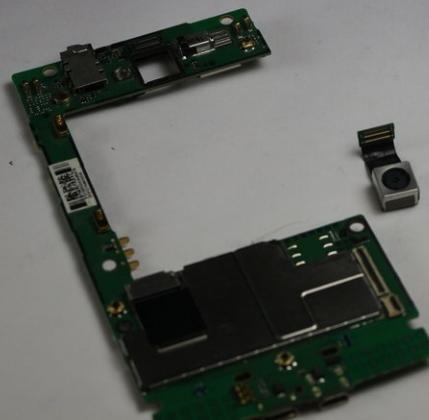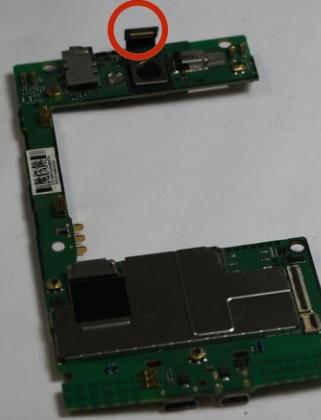

- Use the the spudger to unclip the connector above the camera.
- Remove the camera.

To reassemble your device, follow these instructions in reverse order.