




Motorola V180 Motherboard Replacement

Written By: Tyler Knisley

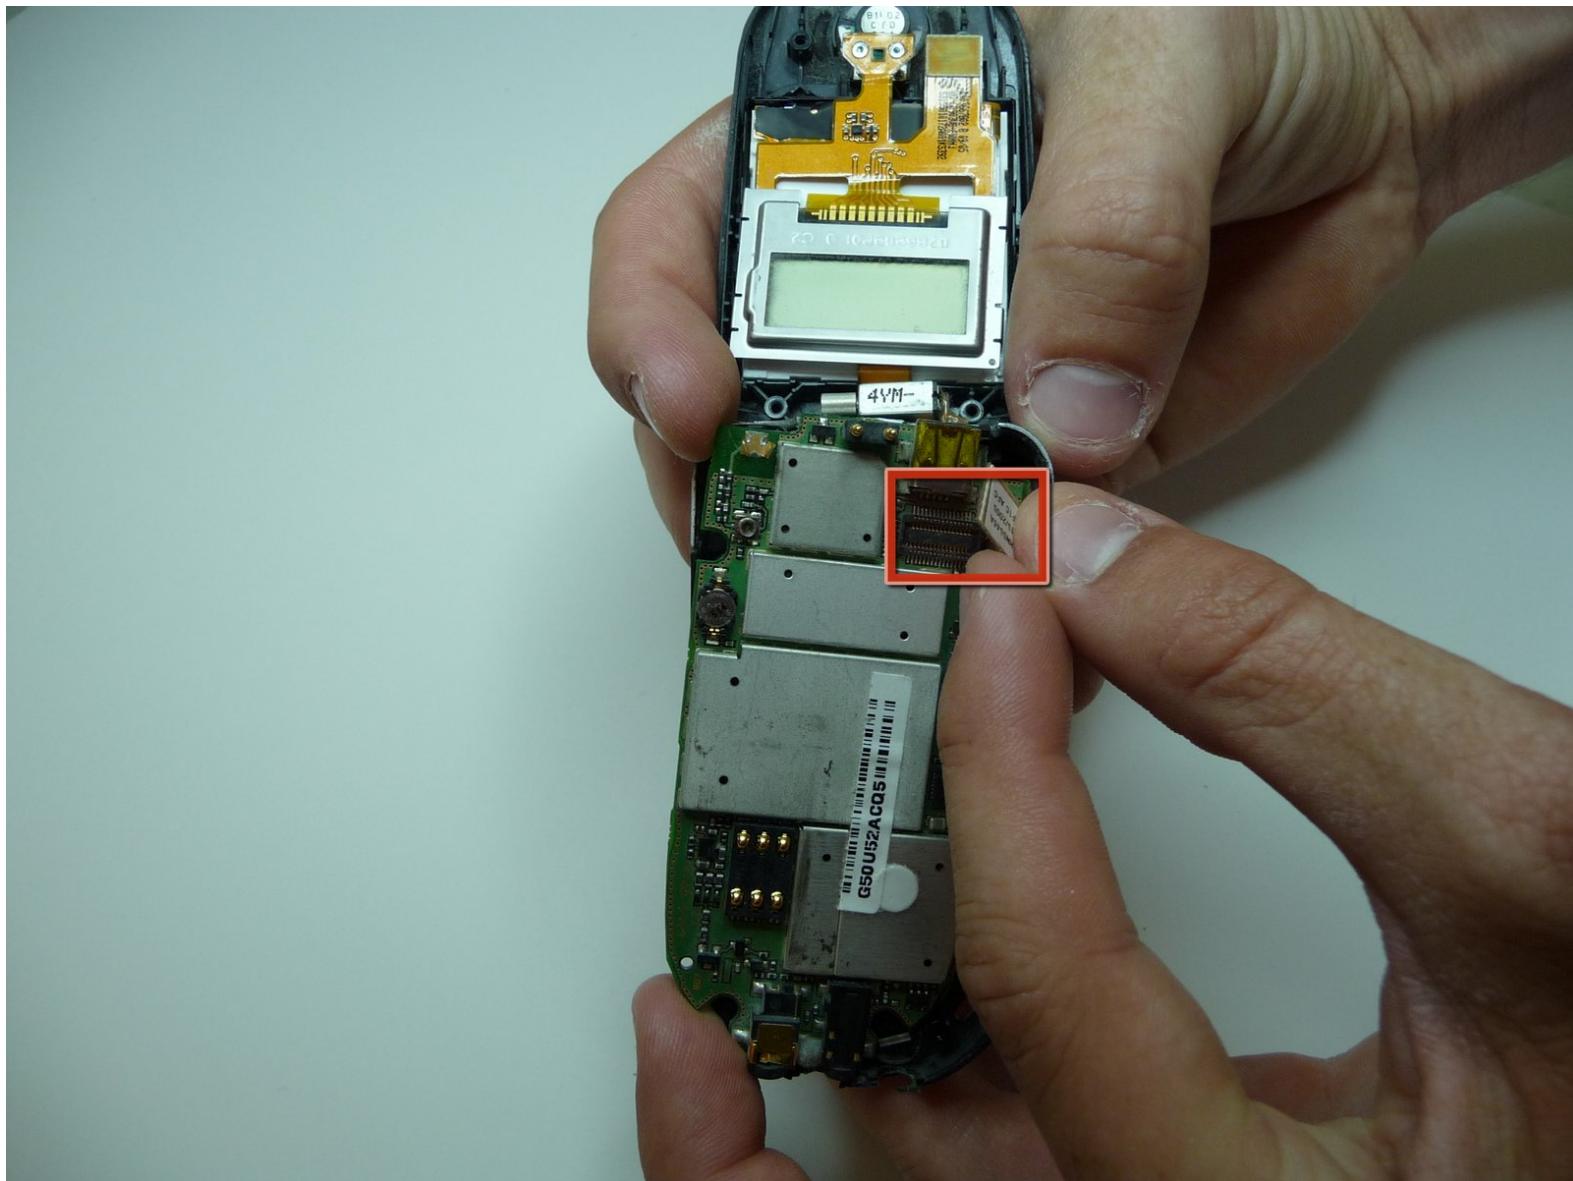


INTRODUCTION

The following repair instructions will guide you through the removal of your Motorola V180 Motherboard. However, be careful as some parts do easily fall off.

TOOLS:


- [T6 Torx Screwdriver](#) (1)

Step 1 — Battery

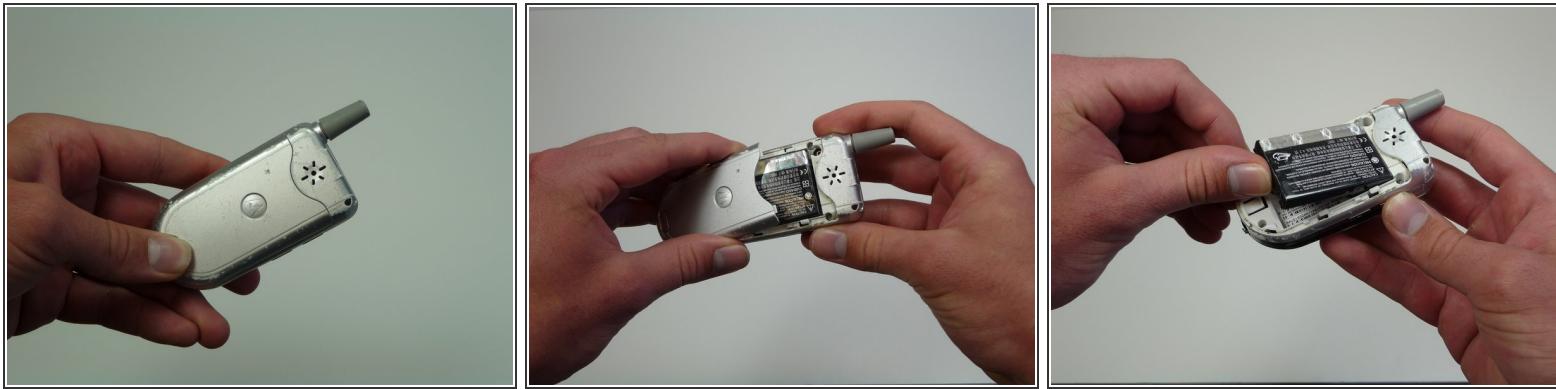

- Flip over the phone, press down the button and slide off the back cover.
- Remove the battery.


Step 2 — Keypad

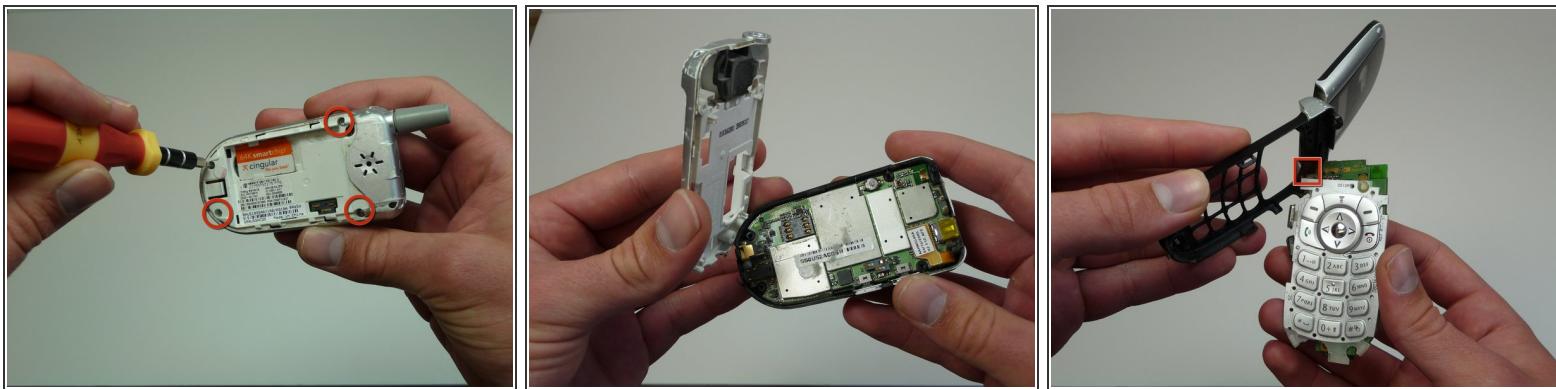

- Locate the four screws on the back of the phone.
- Using your T6 Torx Screwdriver, unscrew these screws.
- Remove the SIM card located on the back of the phone.

! A ribbon near the antenna is still attached to the motherboard. Do not break this ribbon.

Step 3 — Motherboard

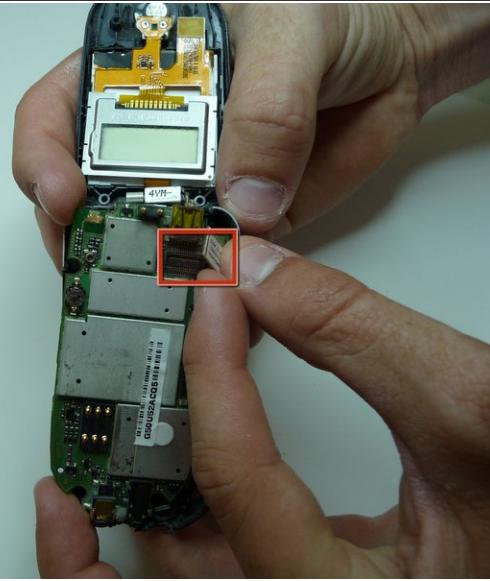

- Unclip the pronged rectangle connector ribbon attached to the motherboard.
- Remove the motherboard.

To reassemble your device, follow these instructions in reverse order.