




Motorola V276 Ear speaker replacement

Written By: Kyle Klitzner

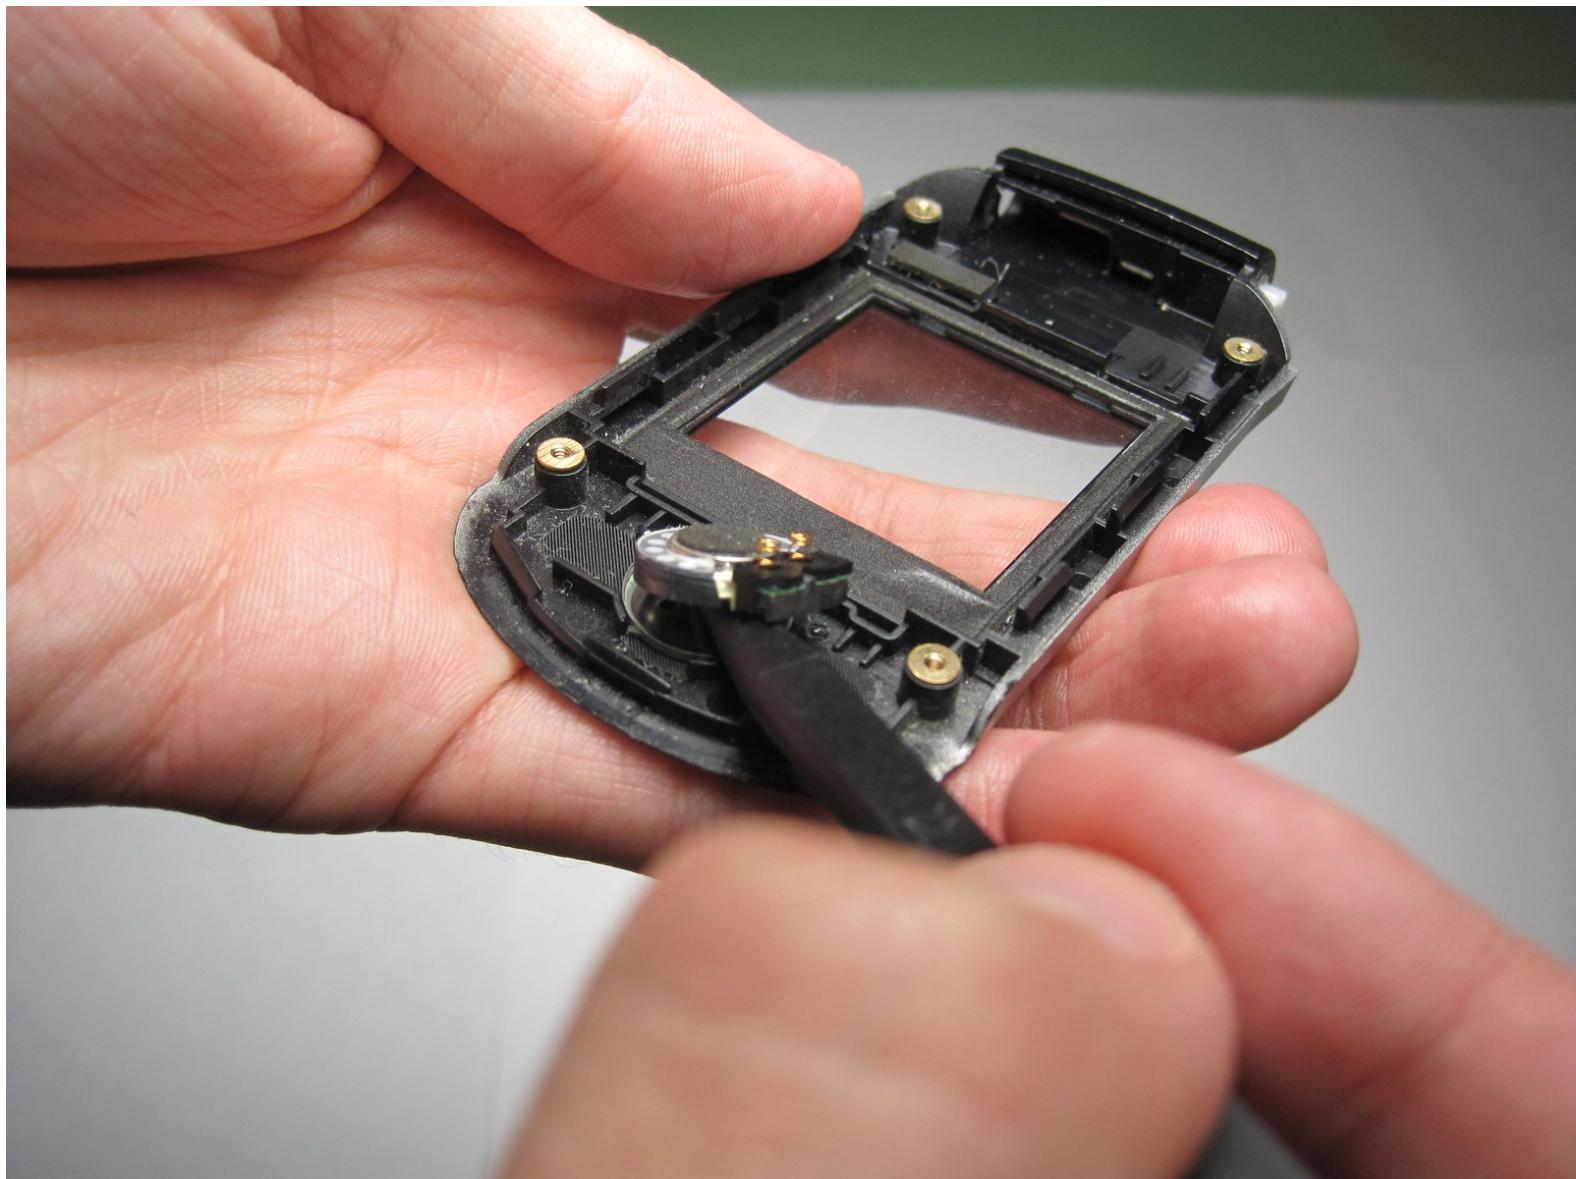

INTRODUCTION

A guide for replacing or inspecting the Motorola V276 ear speaker

TOOLS:

- [Spudger \(1\)](#)
- [T6 Torx Screwdriver \(1\)](#)
- [iFixit Opening Tools \(1\)](#)

Step 1 — ear speaker




- Place a plastic opening tool in the small crack that runs along the side of the front case to pry it off.

Step 2




- Use a T6 Torx Screwdriver to remove all 4 small screws.

Step 3

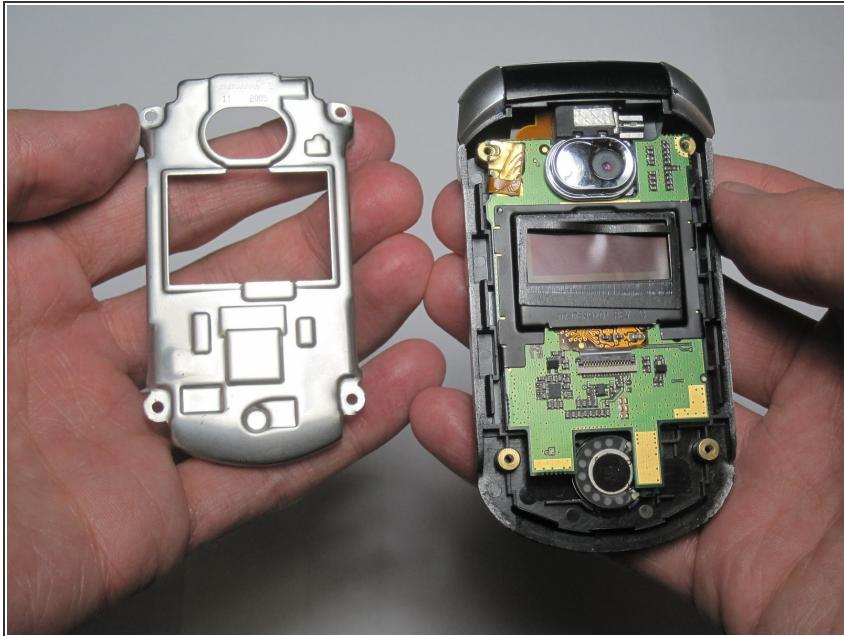

- Remove the midframe from phone.

Step 4

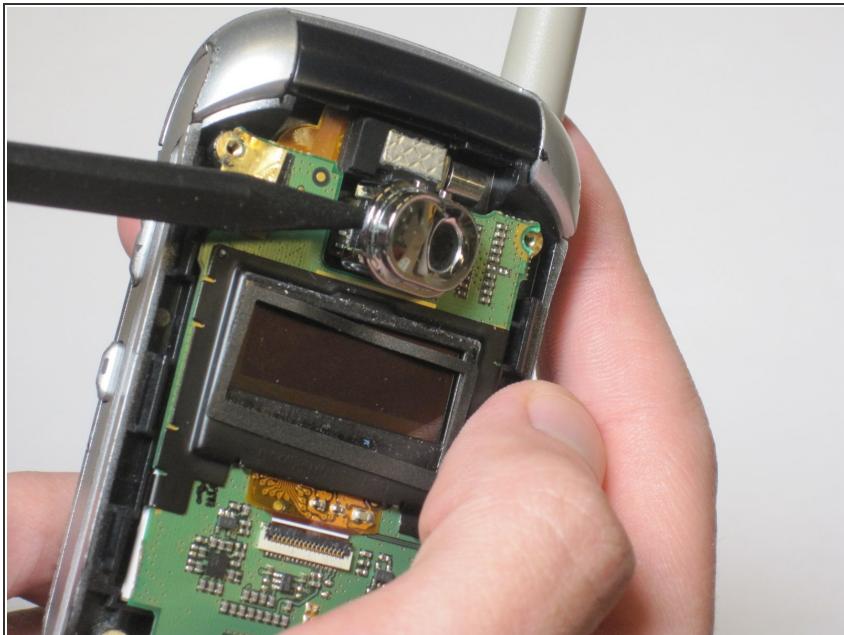


- Use a spudger to remove the plastic camera casing.

Step 5



- Gently lift the LCD away from the frame.

Step 6

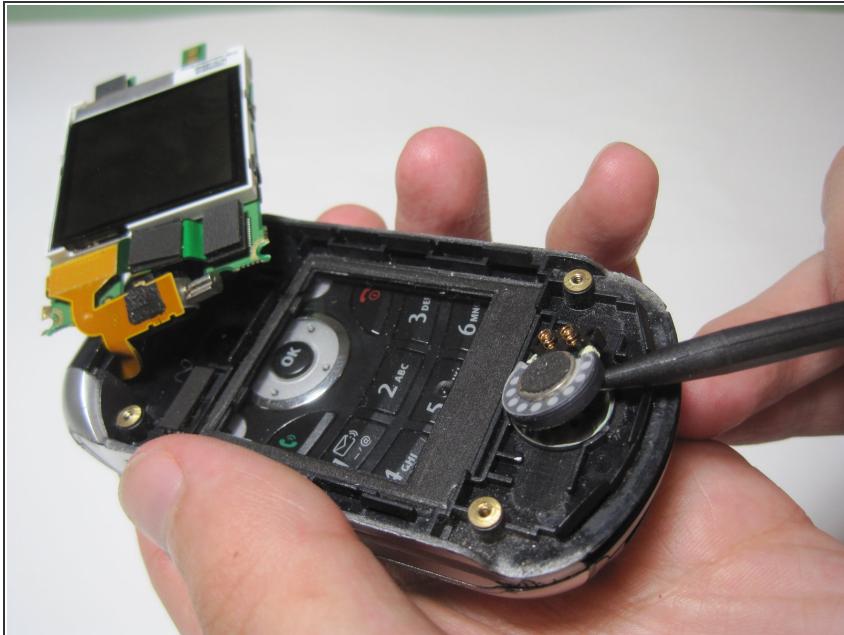

- Use your hands or a spudger to remove the ear speaker.

To reassemble your device, follow these instructions in reverse order.