



Motorola V551 Earpiece Speaker Replacement

Written By: gregatron



INTRODUCTION

This guide is for removing the phone's earpiece speaker.

TOOLS:

- [iFixit Opening Tools](#) (1)
- [Spudger](#) (1)
- [T6 Torx Screwdriver](#) (1)

Step 1 — Screen




- Using a spudger, remove the four rubber covers from over the screws.

Step 2



- Unscrew the four cover screws using the T6 bit.

Step 3

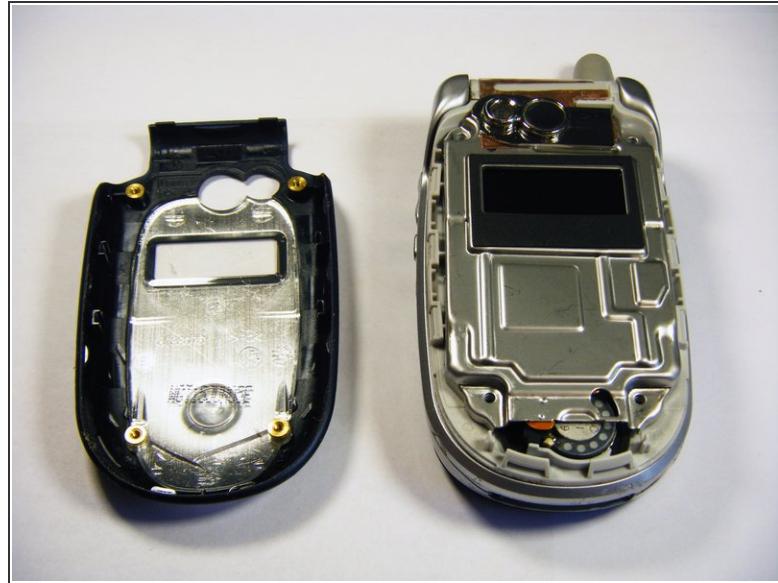


- Loosen and remove the cover with a plastic opening tool.

Step 4



- Gently loosen the protective cover with the plastic opening tool.


Step 5

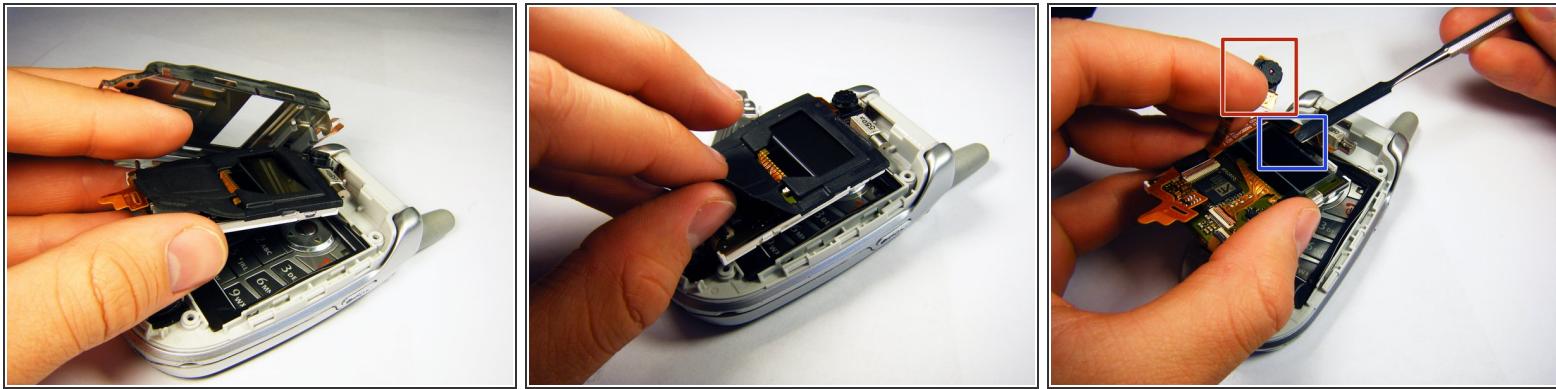

⚠ Carefully remove the protective cover from the circuitry

- Slowly peel the black rubber gasket up off the circuit board.
- Carefully move the camera out of the way using your hand.
- Use a flat tool to separate the connection between the upper and lower circuit boards.

Step 6

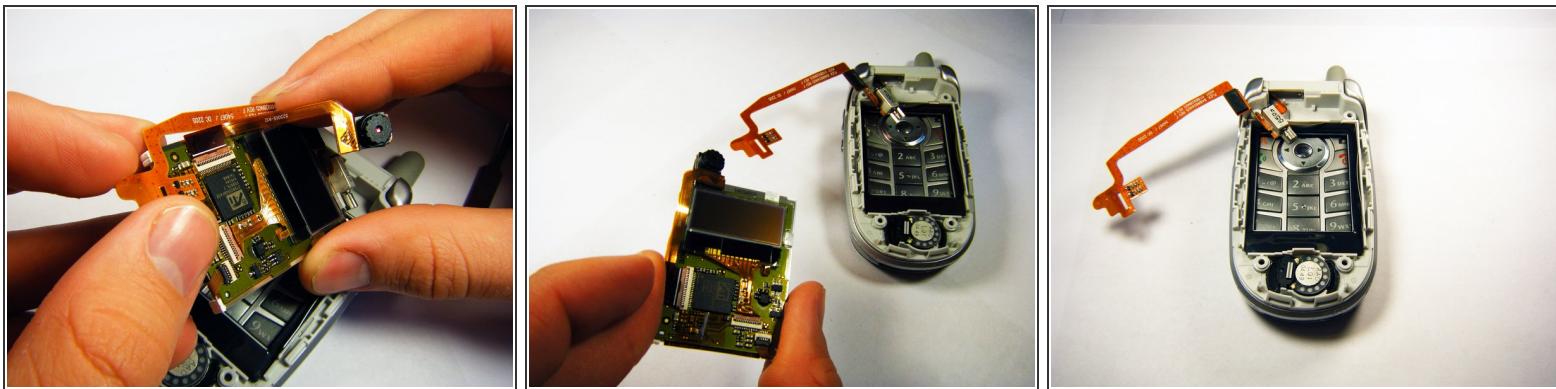

- Gently slip the copper strip out from under the circuitry by hand.

Step 7 — Earpiece Speaker



- Pry out the speaker using your fingers.

To reassemble your device, follow these instructions in reverse order.