



Motorola V557 Camera Replacement

Written By: Matthew Sanders



INTRODUCTION

Prerequisites: Battery, Faceplate

TOOLS:


- [iFixit Opening Tools](#) (1)
- [Push Pin](#) (1)
- [Spudger](#) (1)
- [T6 Torx Screwdriver](#) (1)

Step 1 — Battery



- Push down on the silver button while sliding the back plate down to reveal the battery.

Step 2

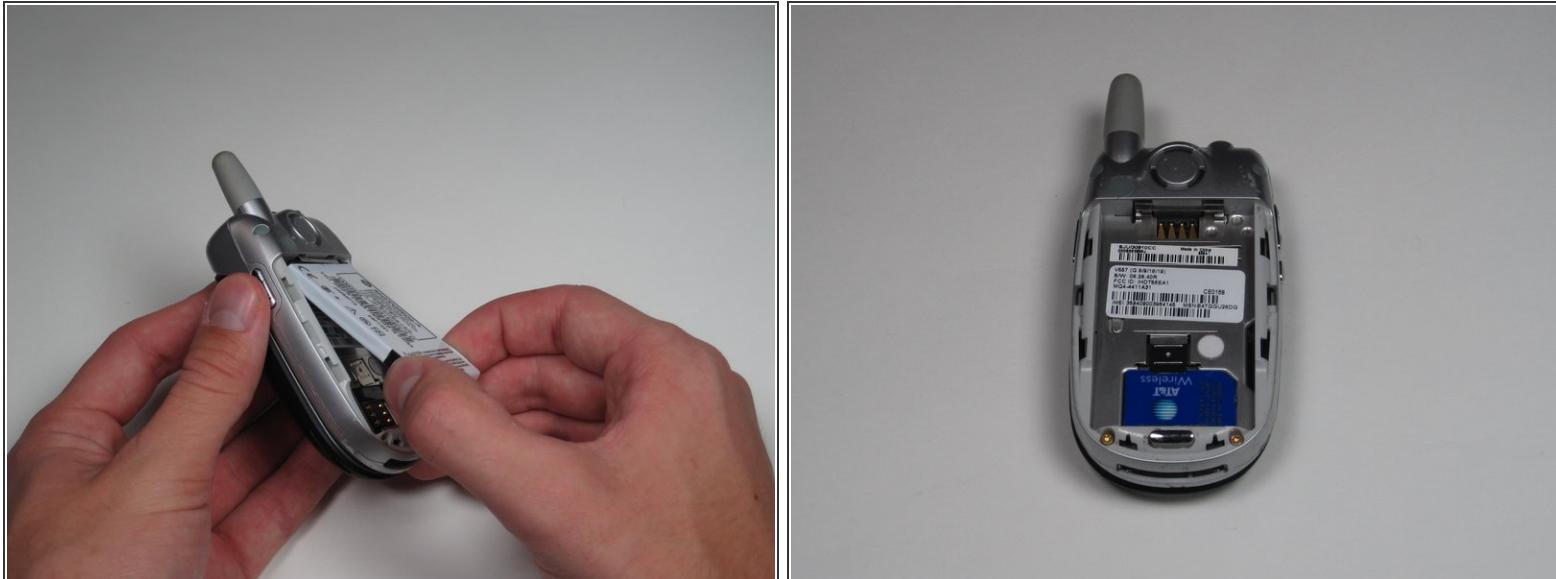


- Grab the lower edge of battery at the black areas and pull upward on the edges to remove it.

Step 3 — Faceplate



- Remove the four rubber stoppers from around the screen with a pin to reveal four screws.

Step 4

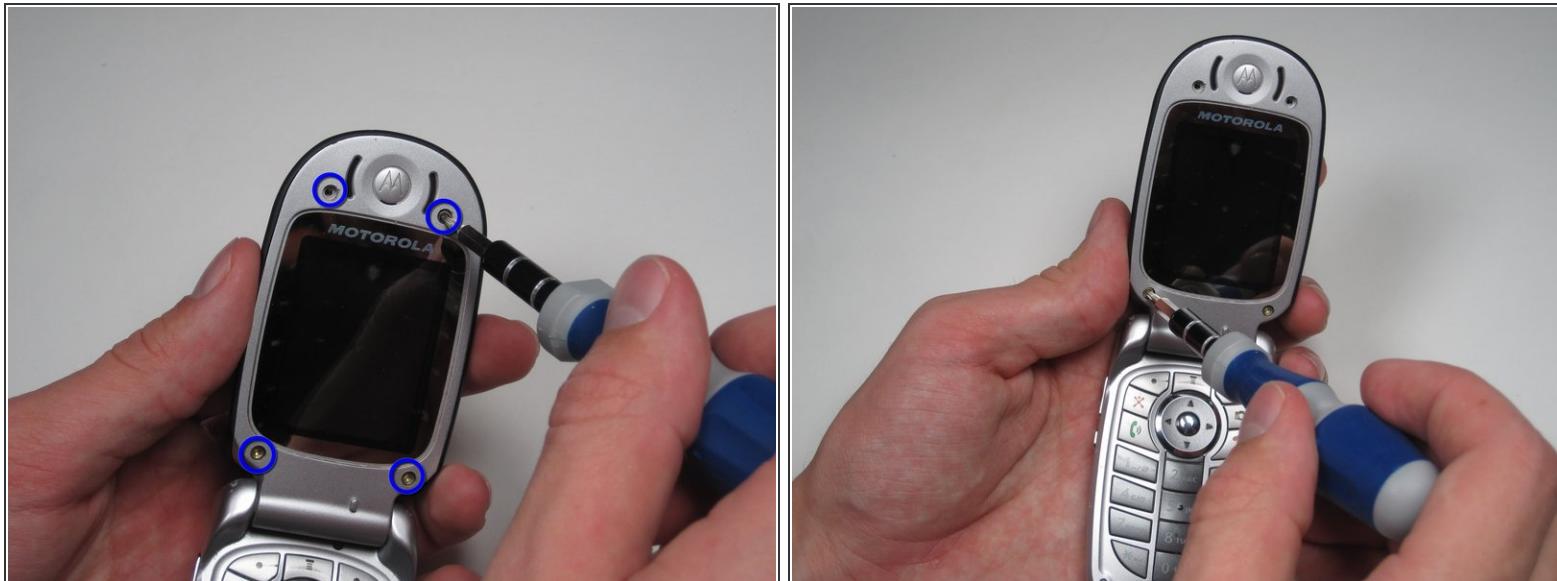

- Remove the four 3.8 mm T-6 Torx screws.

Step 5




- Separate the cover from the edges using a plastic opening tool.

Step 6



- With the edges separated, close the phone and lift off the faceplate with your fingers.

Step 7 — Camera

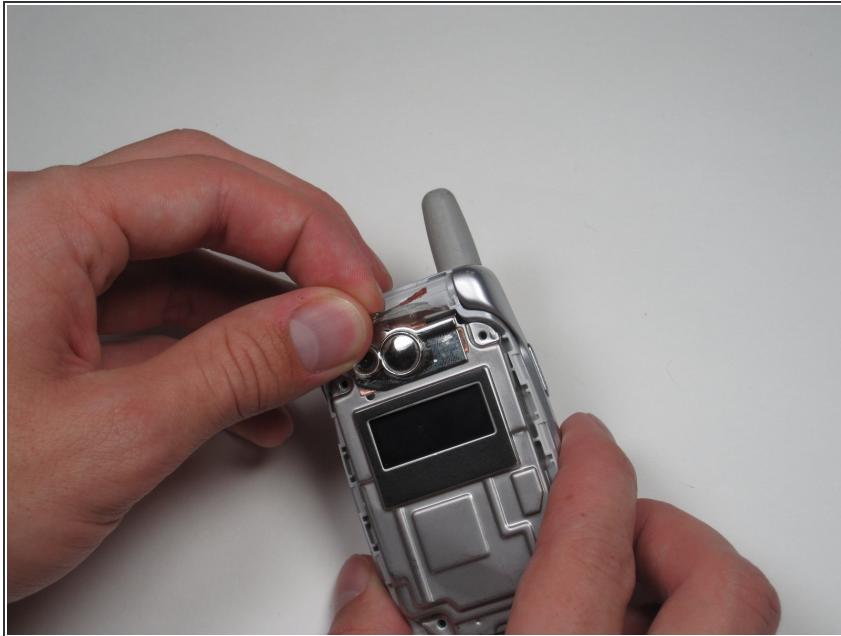


- Gently peel off the plastic film from the metal plate above the camera lens as shown.

Step 8




- Insert the spudger into the slots marked and gently pry upwards to remove the metal cover.
- Repeat the previous bullet for the two corresponding tabs on the opposite side of the phone.

Step 9

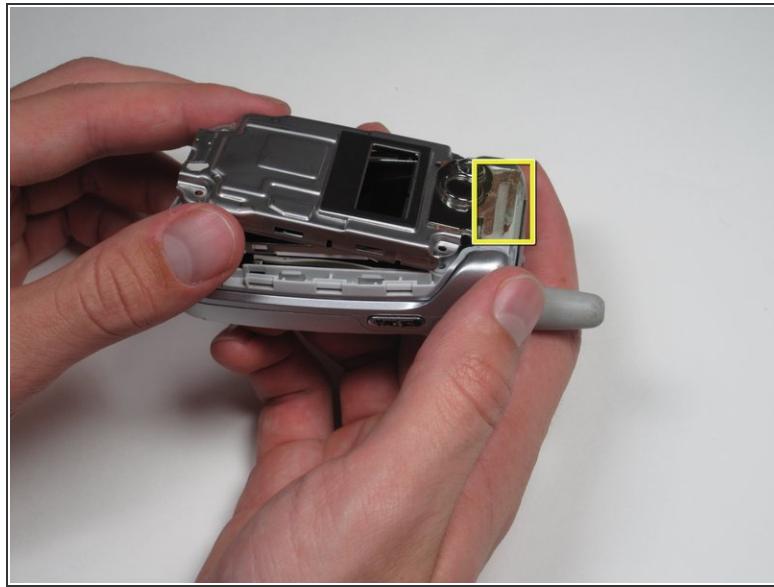

- Lift and peel back the tape attaching metal casing to body of the phone.
- Gently lift the metal cover and remove to expose the circuit board.

Step 10

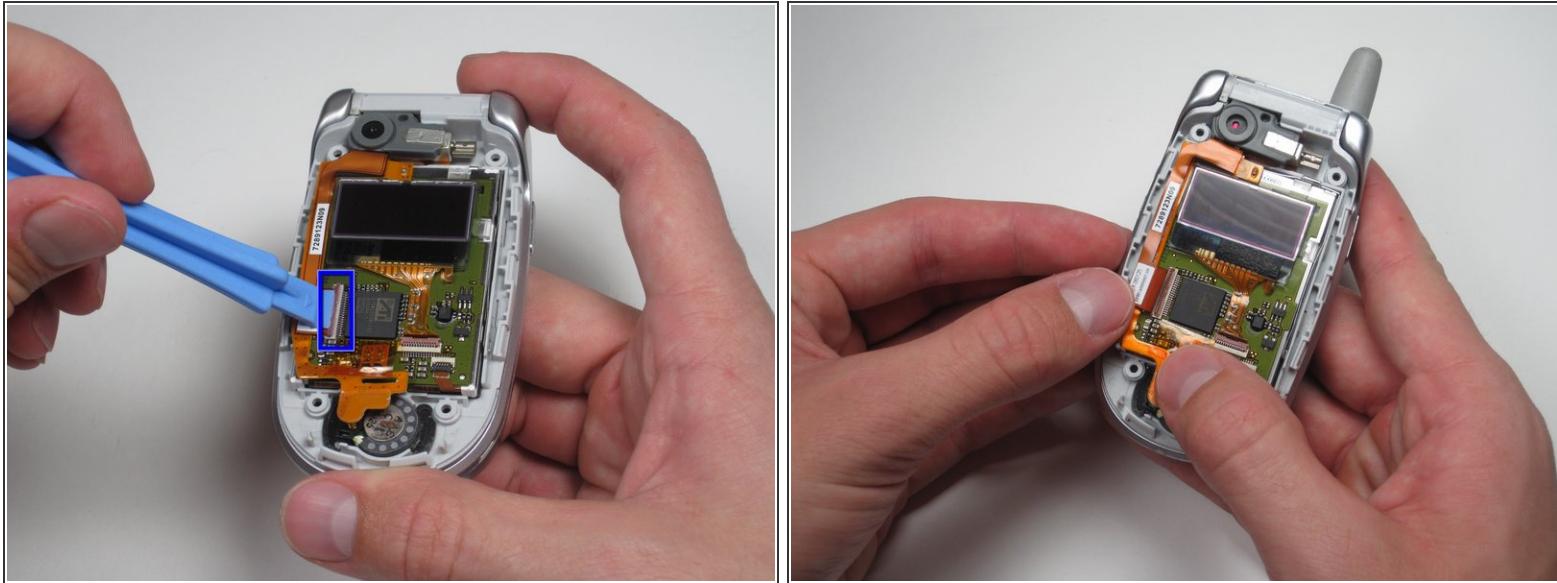

- Using a plastic opening tool, pry or lift open the pink door shown.
 - After the door is open, gently pull on the ribbon cable's corner to separate it from the board.


⚠ Work out the ribbon cable's end slowly and gently to avoid damaging the pink door port.

Step 11



- Use a plastic opening tool to dislodge and remove the rubber camera cover.

Step 12

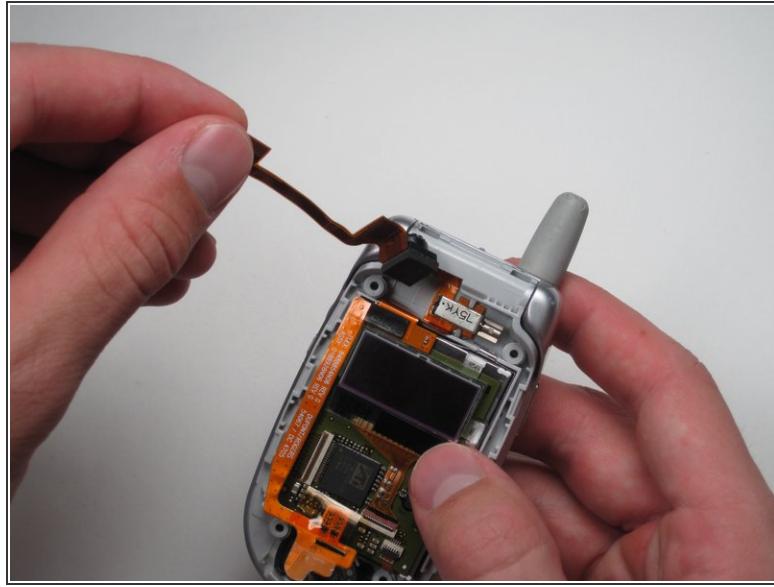

- Lift the top ribbon cable, with camera attached, up and away from the rest of the phone.

To reassemble your device, follow these instructions in reverse order.