



Motorola V557 Faceplate Replacement

Removal of Motorola V557 Faceplate to access screen and camera

Written By: Blair Frandeen



 **TOOLS:**


- [iFixit Opening Tools \(1\)](#)
- [Push Pin \(1\)](#)
- [T6 Torx Screwdriver \(1\)](#)

Step 1 — Faceplate



- Remove the four rubber stoppers from around the screen with a pin to reveal four screws.

Step 2

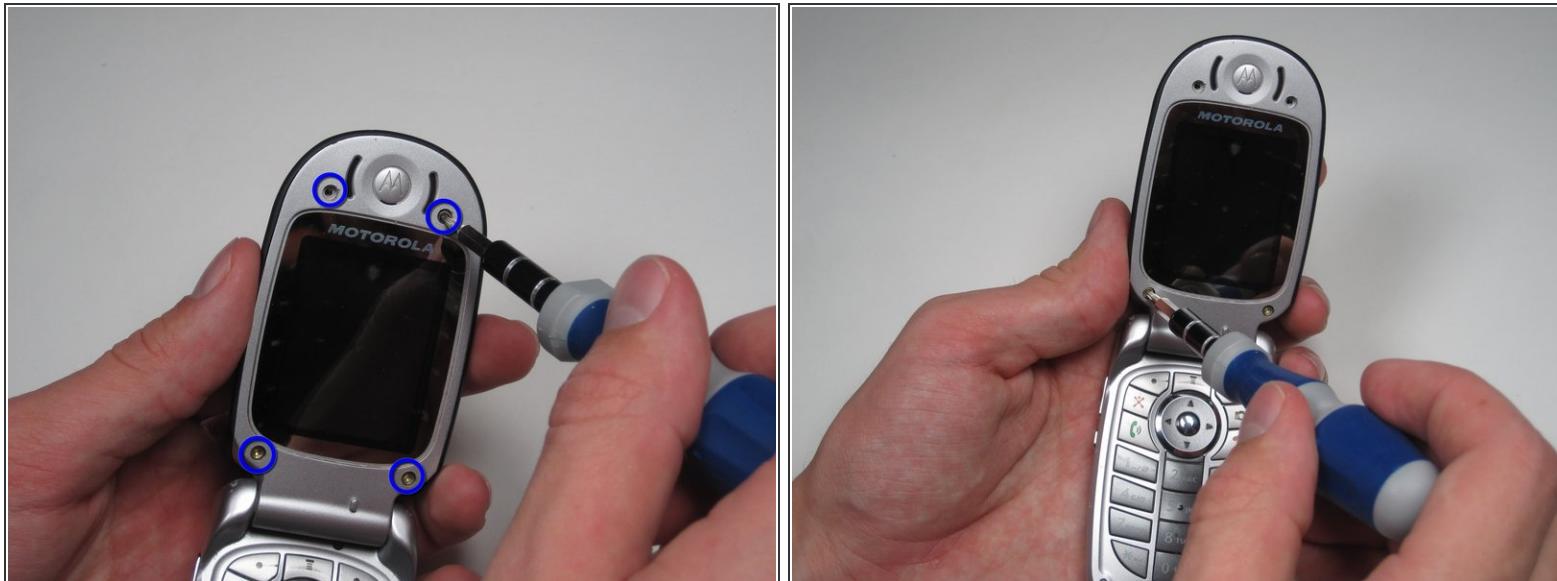

- Remove the four 3.8 mm T-6 Torx screws.

Step 3



- Separate the cover from the edges using a plastic opening tool.

Step 4



- With the edges separated, close the phone and lift off the faceplate with your fingers.

To reassemble your device, follow these instructions in reverse order.