




Motorola V557 Rear Casing Replacement

This guide will show how to separate out the pieces of the lower case to access the logic board, keypad, headphone jack and external speaker.

Written By: Alex Georges

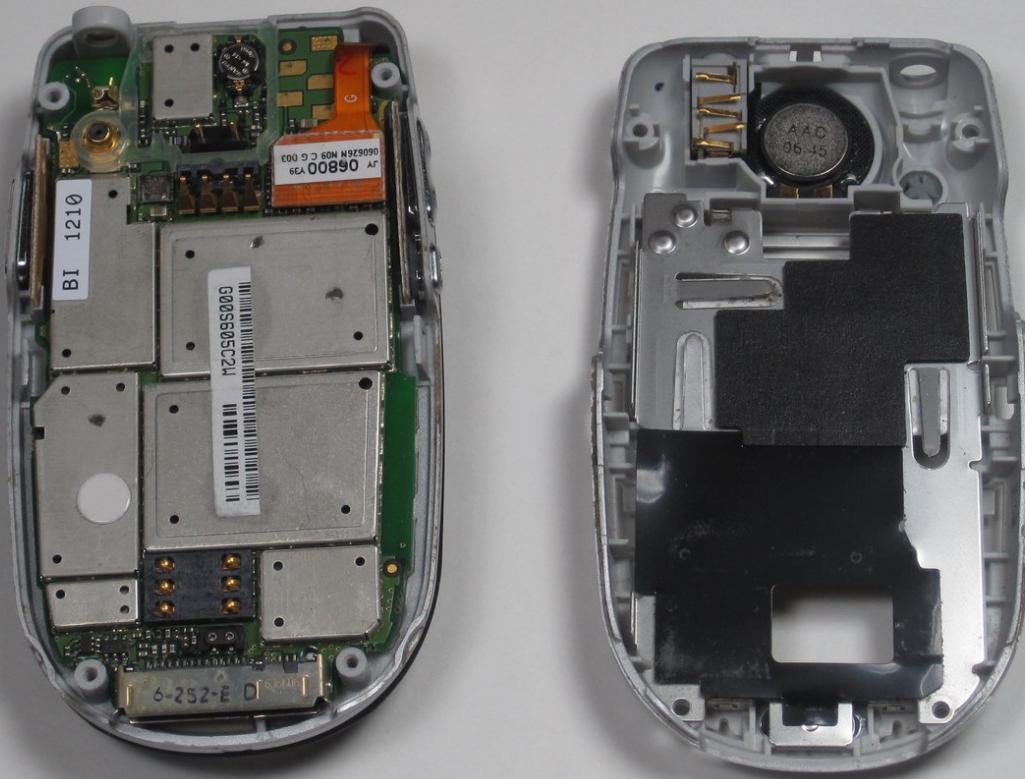

INTRODUCTION

This section will show how to separate the pieces of the main case to reveal the internal components.

TOOLS:


- Push Pin (1)
- Spudger (1)
- T6 Torx Screwdriver (1)

Step 1 — Battery




- Push down on the silver button while sliding the back plate down to reveal the battery.

Step 2

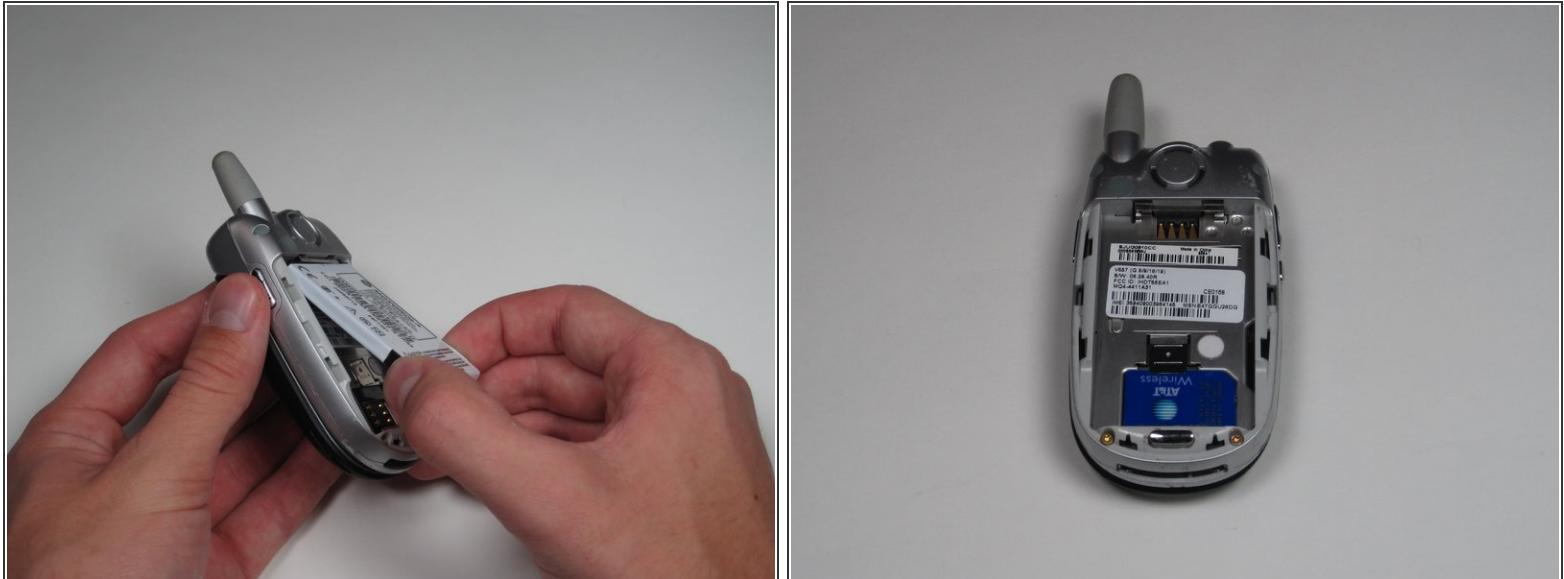

- Grab the lower edge of battery at the black areas and pull upward on the edges to remove it.

Step 3 — SIM Card

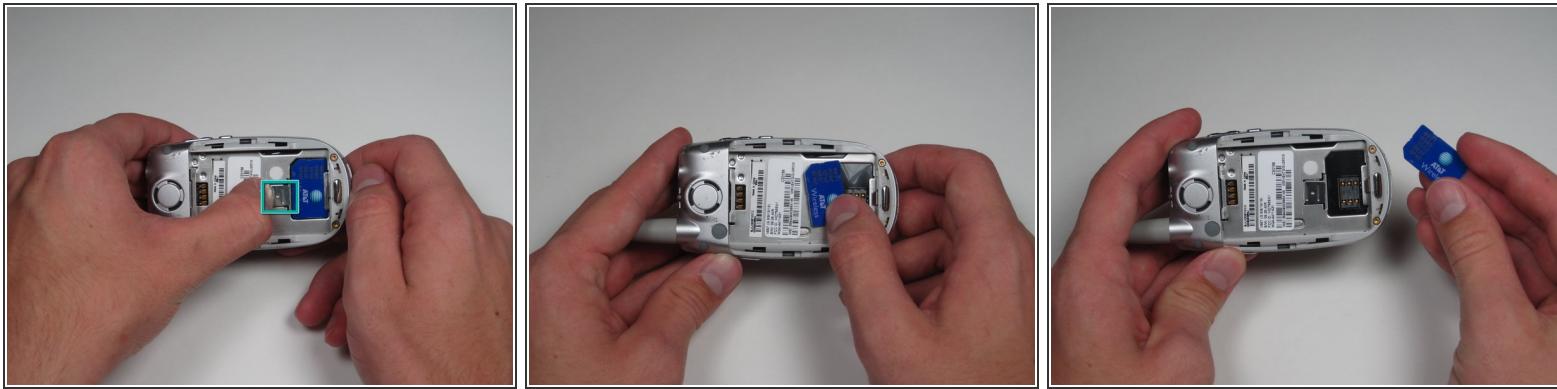

- Move the the metal slider towards the top of the phone until it clicks out of its original position.
- Slide out and remove the SIM card.

Step 4 — Antenna



- Grip the antenna and twist it counterclockwise to loosen it.
- When it has been loosened all the way, pull gently to remove the antenna piece.

Step 5 — Rear Casing



- Remove the screw covers over the two top screws by prying gently with a pin.
- The large cover in the upper left of the back plate has no screw behind it, so should *not* be removed.

Step 6



- Remove all four 6.0 mm Torx screws.

Step 7



- Insert a spudger into marked holes, one at a time, and pry away from the phone to release internal tabs.
- Separate and detach the rear casing.

To reassemble your device, follow these instructions in reverse order.