




# Motorola V60c Antenna Replacement

Written By: Ryan Kuroiwa

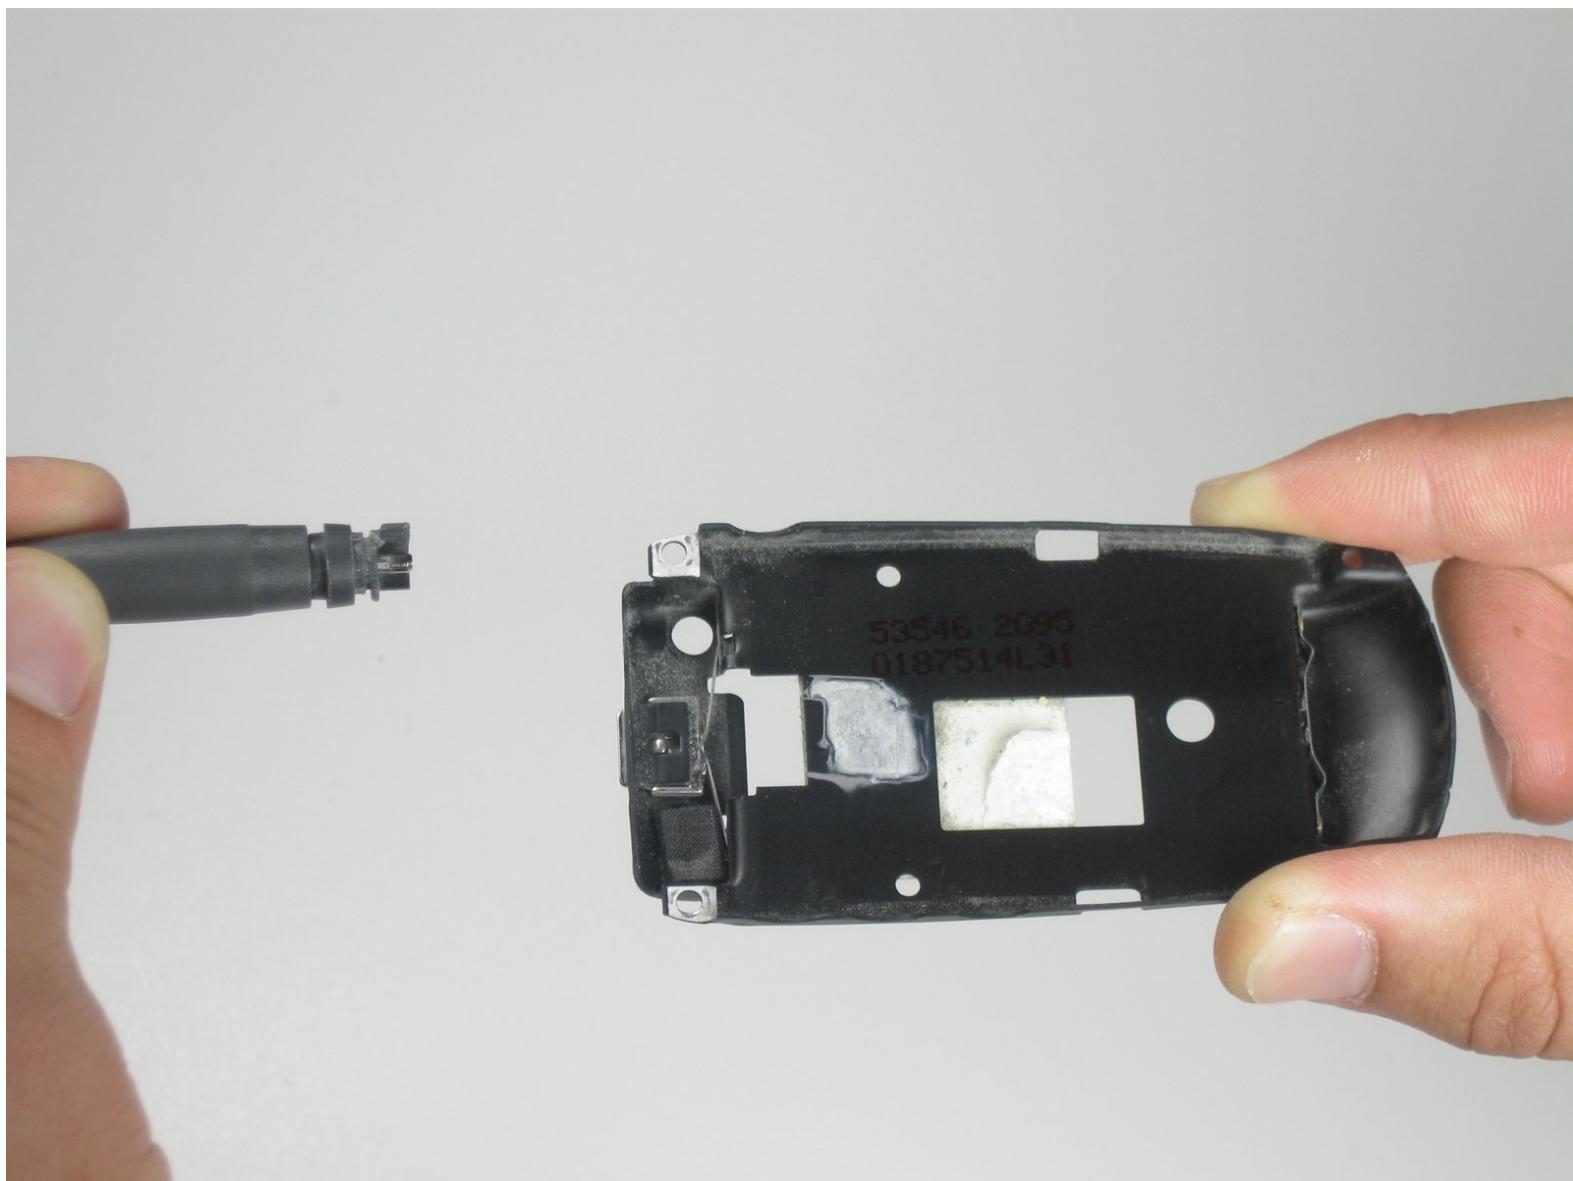

# INTRODUCTION

How to replace a faulty antenna.

## TOOLS:

- iFixit Opening Tools (1)
- T6 Torx Screwdriver (1)

## PARTS:

- Motorola V60c Antenna (1)

## Step 1 — Battery



- Depress the silver button.
- Pull from top of phone to lift the cover.

## Step 2



- Hold battery from both sides at the bottom.
- Push upwards and gently lift to remove.

## Step 3 — Antenna




- Remove the four screws from the corners using a T-6 screwdriver.  
*(i)* NOTE: Bottom two screws are gold.  
*(i)* NOTE: Make sure screws return to correct place when reassembling.

## Step 4




- Use spudger to pry up back cover from the two side clips.  
*(i)* NOTE: sticker might be attached to rest of phone.

## Step 5

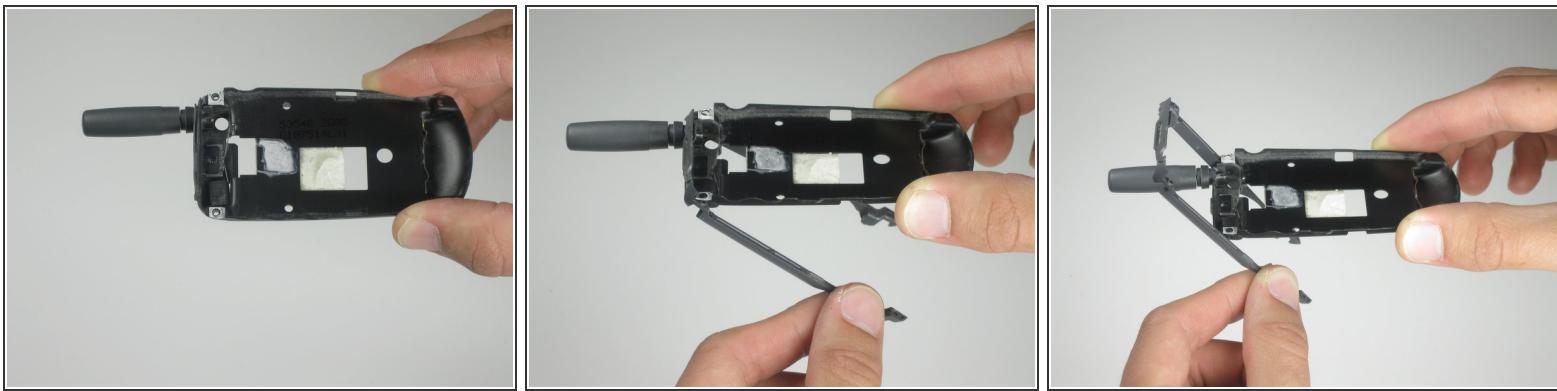

- Flip over the back cover.
- Remove the plastic frame.

## Step 6

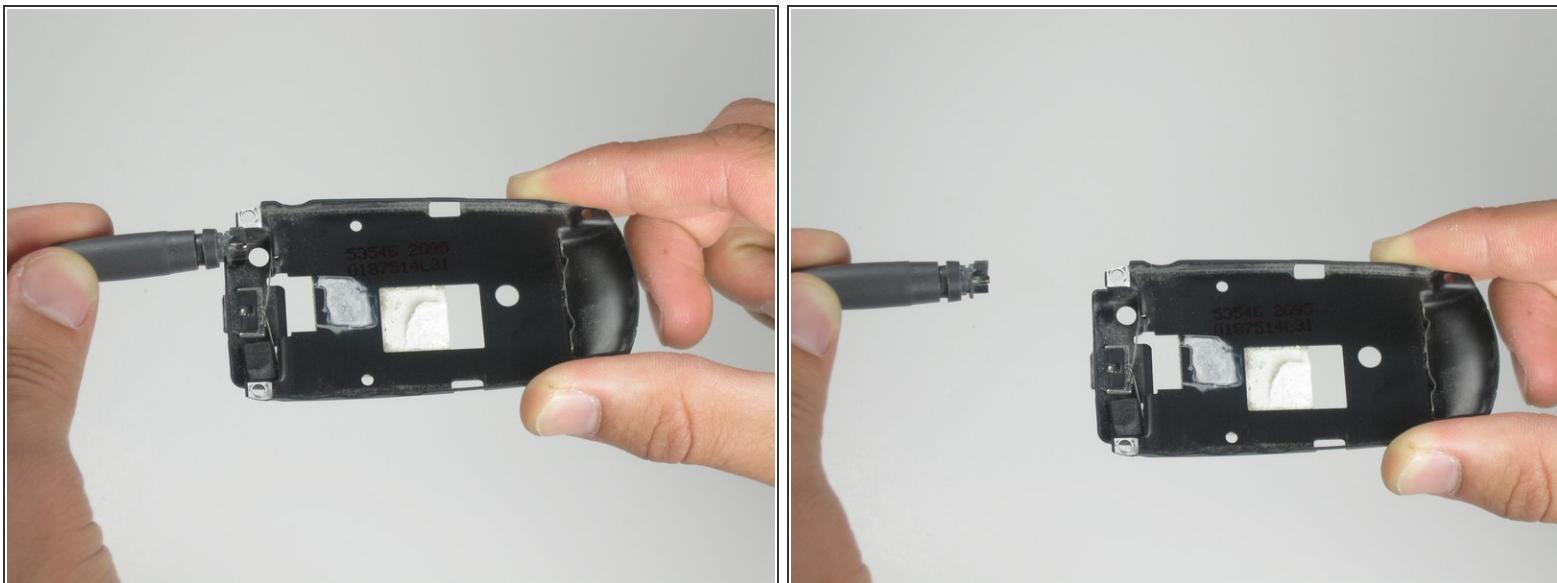

- Lift up antenna.

To reassemble your device, follow these instructions in reverse order.