



# Motorola V60i Back Plate Replacement

Step-by-step guide to removing your Motorola V60i phone's back plate.

Written By: Elizabeth OBrien



## INTRODUCTION

This guide will cover the steps on how to remove the back plate of a Motorola V60i.

### TOOLS:

- [Spudger \(1\)](#)
- [T6 Torx Screwdriver \(1\)](#)

## Step 1 — Battery



- Flip the phone over so the back cover is facing up.
- Using either a finger or a spudger, press the button located near the top of the phone by the antenna.

## Step 2




- Pry up the back plate from the phone.
- Push the button near the bottom of the battery using either your finger or the spudger to release the battery.

## Step 3 — Back Plate



- Using a T6 Torx screwdriver, remove the four screws from the back of the phone.

## Step 4

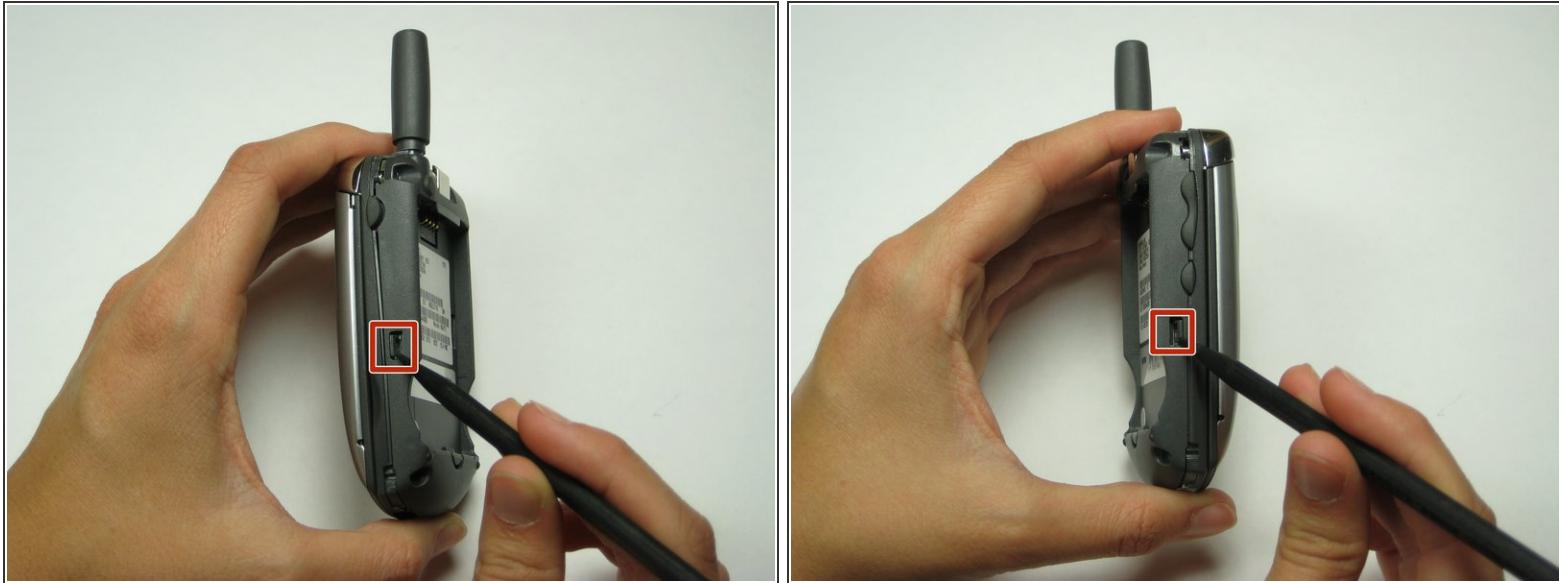

- Simultaneously press the highlighted buttons on both sides of phone.

## Step 5



- Separate the back plate from the rest of phone.

**⚠** Do not pull the wire connecting the front and back plates.

To reassemble your device, follow these instructions in reverse order.