




Motorola V60s Front Chassis Disassembly

Written By: Eric Freeman

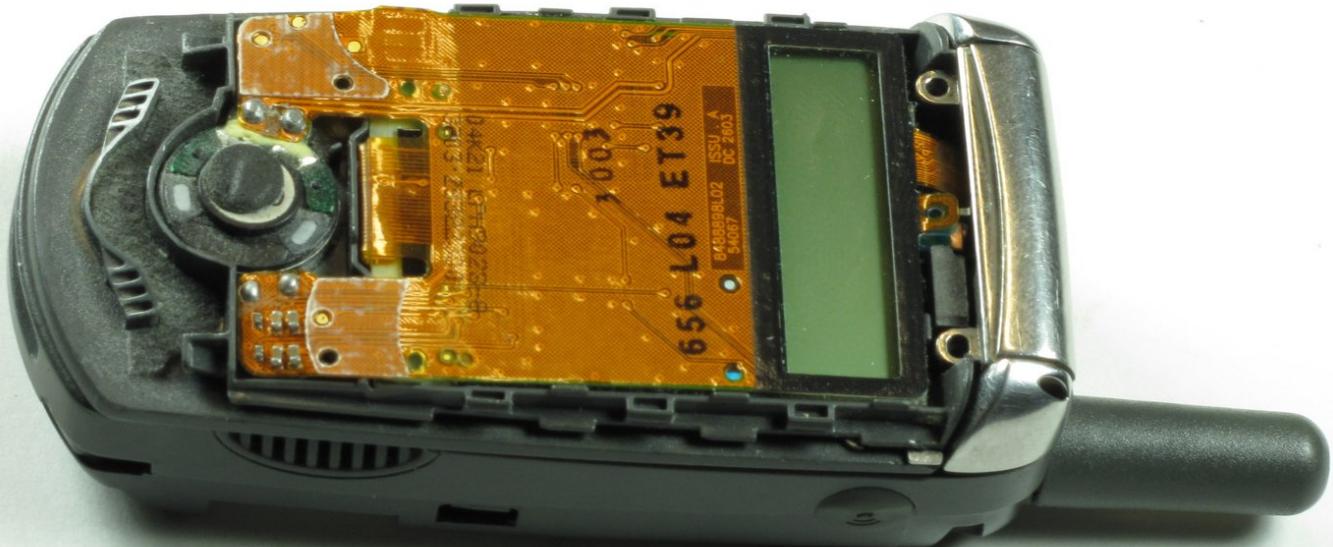

INTRODUCTION

This guide shows how to take apart the front casing. This allows access to the front LCD screen.

TOOLS:

- [Phillips #1 Screwdriver \(1\)](#)
- [iFixit Opening Tools \(1\)](#)

Step 1 — Motorola V60s Front Chassis Disassembly



- Push in and hold small release latch.
- *i* Hold the latch through step 2.

Step 2




- While holding the release latch, use a [opening tool](#) to help you slide off the front cover.

Step 3



- Remove the two Philips screws at top of phone with a #1 Philips screwdriver.

Step 4

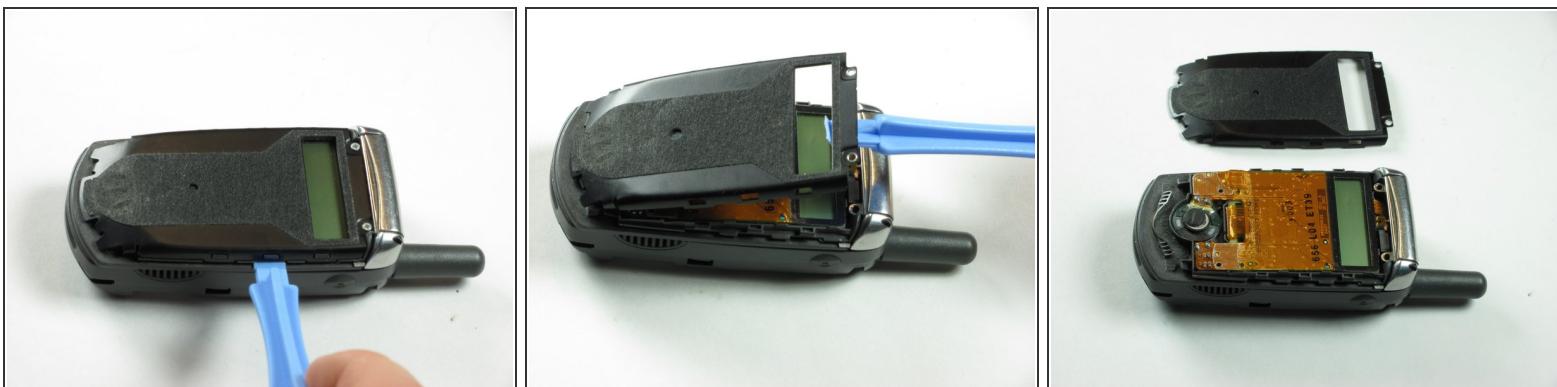

- Use a opening tool to gently pry off black cover, revealing the internal LCD display.

To reassemble your device, follow these instructions in reverse order.