




Motorola V60s Speakers Replacement

Written By: Eric Freeman

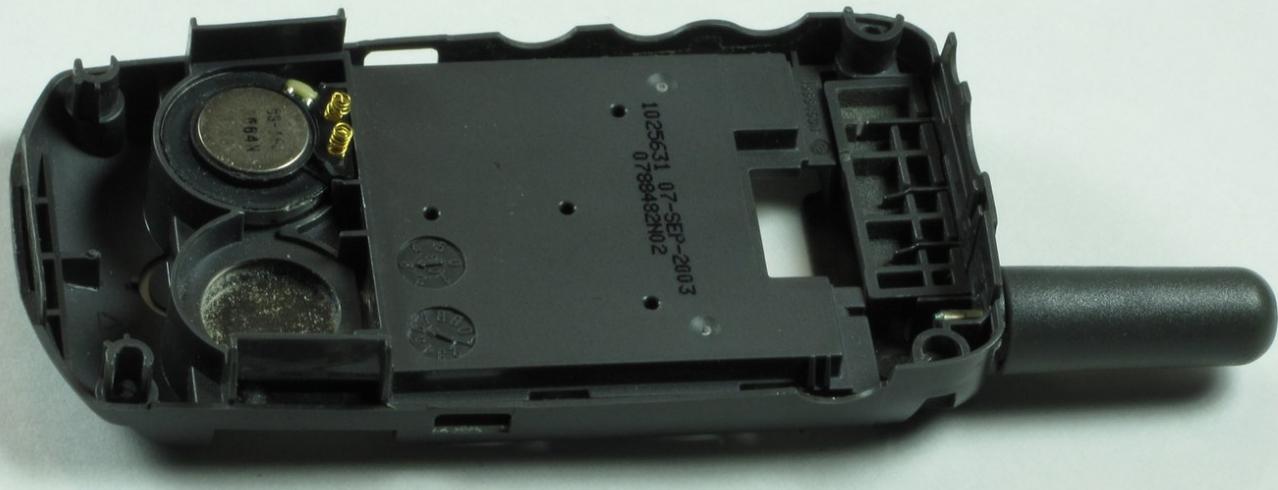

INTRODUCTION

This is a guide showing how to replace the Motorola V60 speakers.

TOOLS:

- [iFixit Opening Tools](#) (1)
- [Spudger](#) (1)
- [T6 Torx Screwdriver](#) (1)

Step 1 — Battery



- Remove the battery cover by pushing down the release lever at the top of the phone while prying off the cover.
- Set the cover aside.

Step 2




- Remove the battery by grabbing it near the bottom and lifting out.

Step 3 — Speakers




- Unscrew four corner screws with T6 screwdriver.
- Note: Top screws are silver and short while bottom screws are black and longer.

Step 4

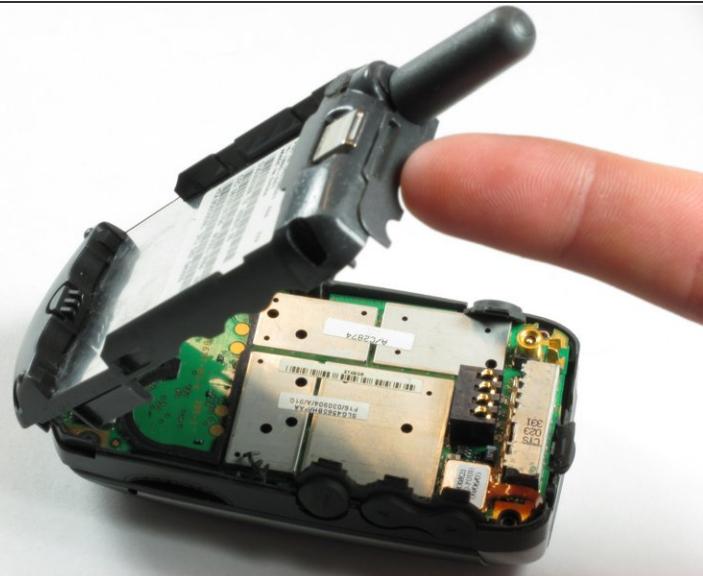

- Pry off back chassis by wedging spudger in crevice between back panel and phone and lifting.

Step 5

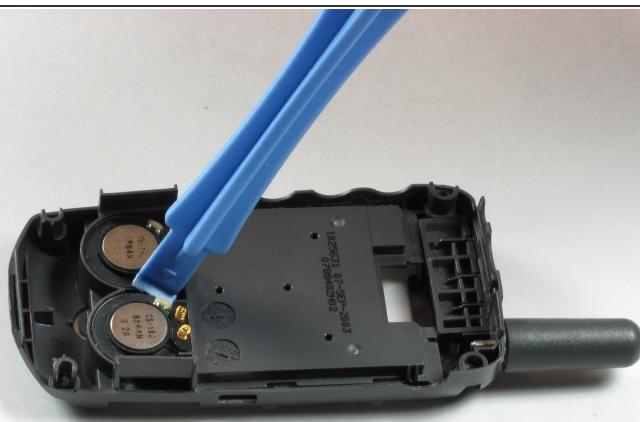

- Insert spudger between speaker and back chassis and lifting.
- Note: This may take some effort.

To reassemble your device, follow these instructions in reverse order.