



# Neato Botvac D75 LCD Screen Replacement

This guide shows the steps required to remove and replace the LCD screen on your Botvac D75.

Written By: Juan Cornejo



## INTRODUCTION



Removing and replacing the LCD screen on your Botvac requires the removal of a couple of other components in order to gain access to it. Included in this guide are instructions on how to remove the battery and brushes. Make sure to keep these components organized in your removal process to ensure an easy re-assembly process.

Also, please note that there may be dirt and debris that are knocked lose while disassembling your Botvac. Keeping a clean work area will prevent you from losing parts in the mess.

### TOOLS:

- Spudger (1)
- Phillips #1 Screwdriver (1)
- T10 Torx Screwdriver (1)


## Step 1 — Battery

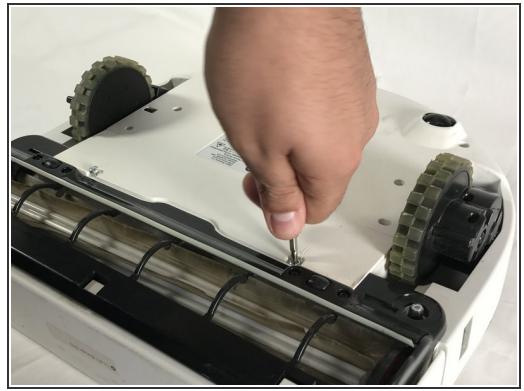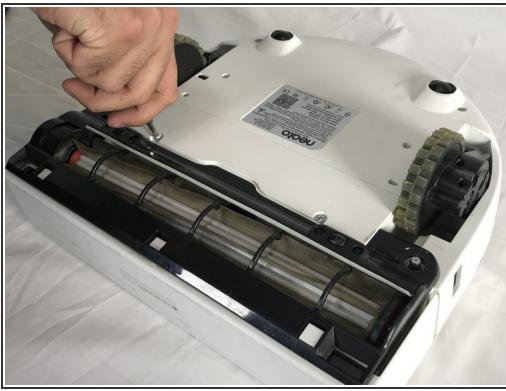

- Use Phillips #1 screwdriver to unscrew the two bottom cover screws

Be careful, the screws are self-retained on the cover itself and does not come off the battery cover.

## Step 2

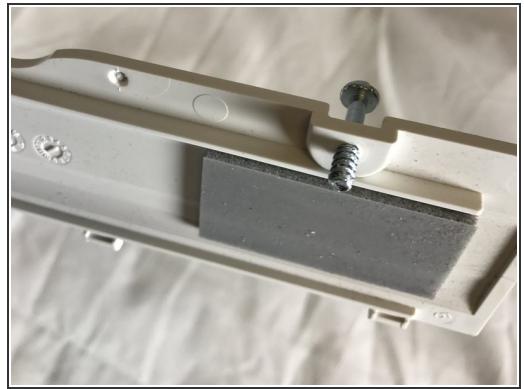

- Lift battery cover out.


## Step 3



**⚠** Be careful when taking out the battery. Do not pull on the wires or battery trying to get the connector out.


- The cord has prongs on it that are a little difficult to get out. Use a flathead screwdriver to press the release tab on the connector to remove it.

## Step 4 — Brushes

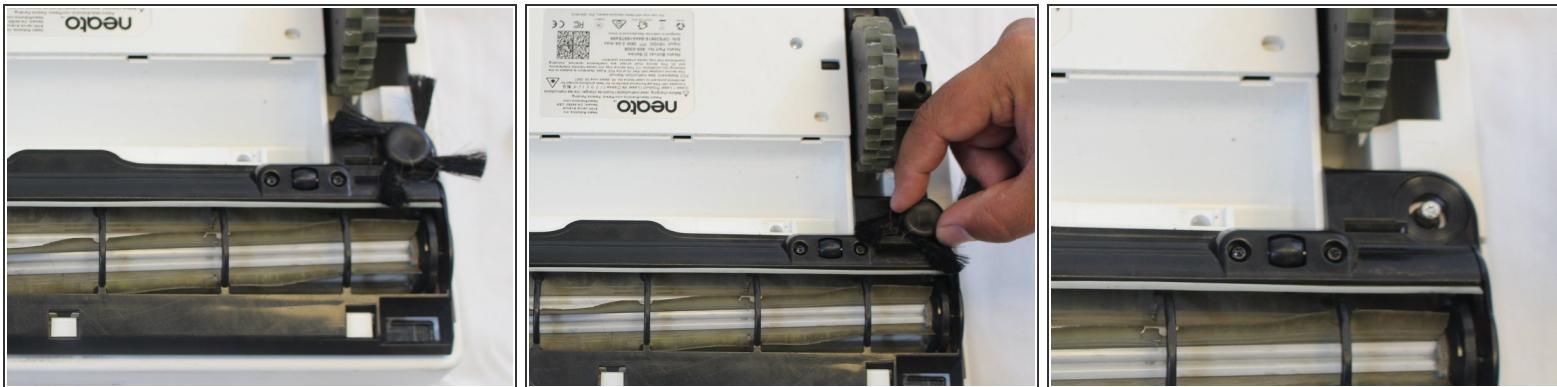

- To remove the rotary brush simply grasp it firmly and pull it off.

## Step 5

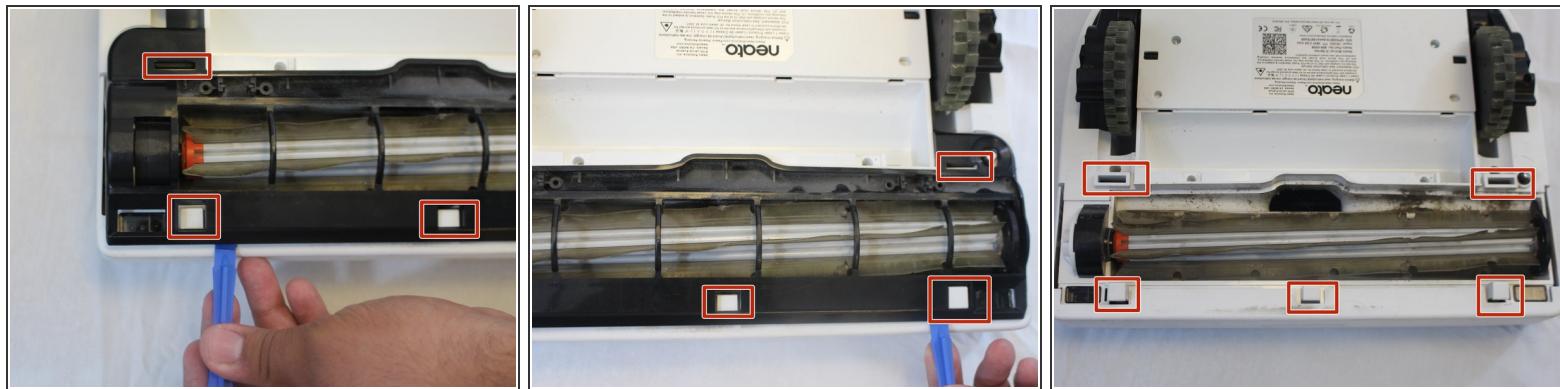

- Once you have everything out get the plastic opening tool and pry open the large black plastic piece.
- With a little force it should come out.

 The boxes show you were the clips are that hold this piece

## Step 6



- Once the black piece has been taken out, the brush just comes out easily.

## Step 7 — LCD Screen



- Firmly grasp the back cover and pull away from the Botvac one side at a time.
- Removing the cover will expose two 1.3mm T10 screws that must be removed to separate the cover halves.


## Step 8



- Remove these two 13mm T10 screws. You will need to use the extension in your tool set since they are deep in the casting.

This document was generated on 2019-10-05 04:19:50 PM (MST).

## Step 9

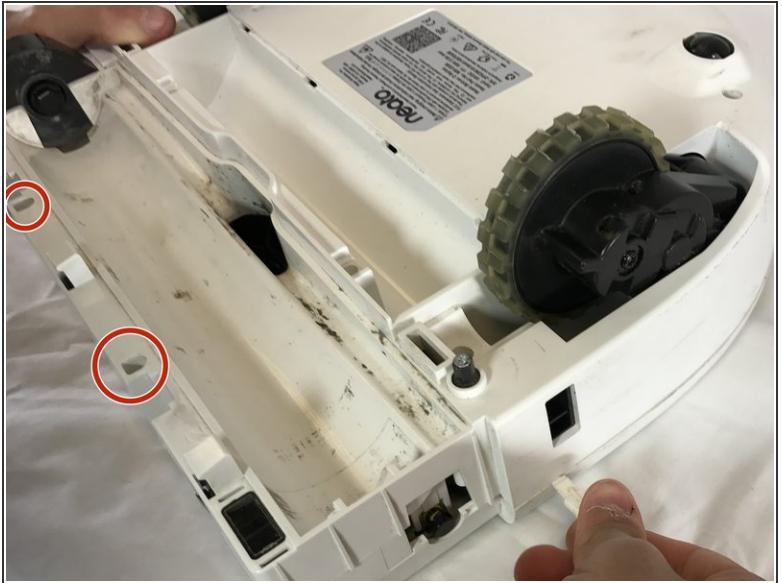


- Eight 13mm T10 screws on the underside of the Botvac hold the casing together. These screws are not self-retained so make sure that you don't lose them in the disassembly process.

## Step 10



- The screws pictured here on either side of the Botvac require the extension in your tool set to be removed.

## Step 11

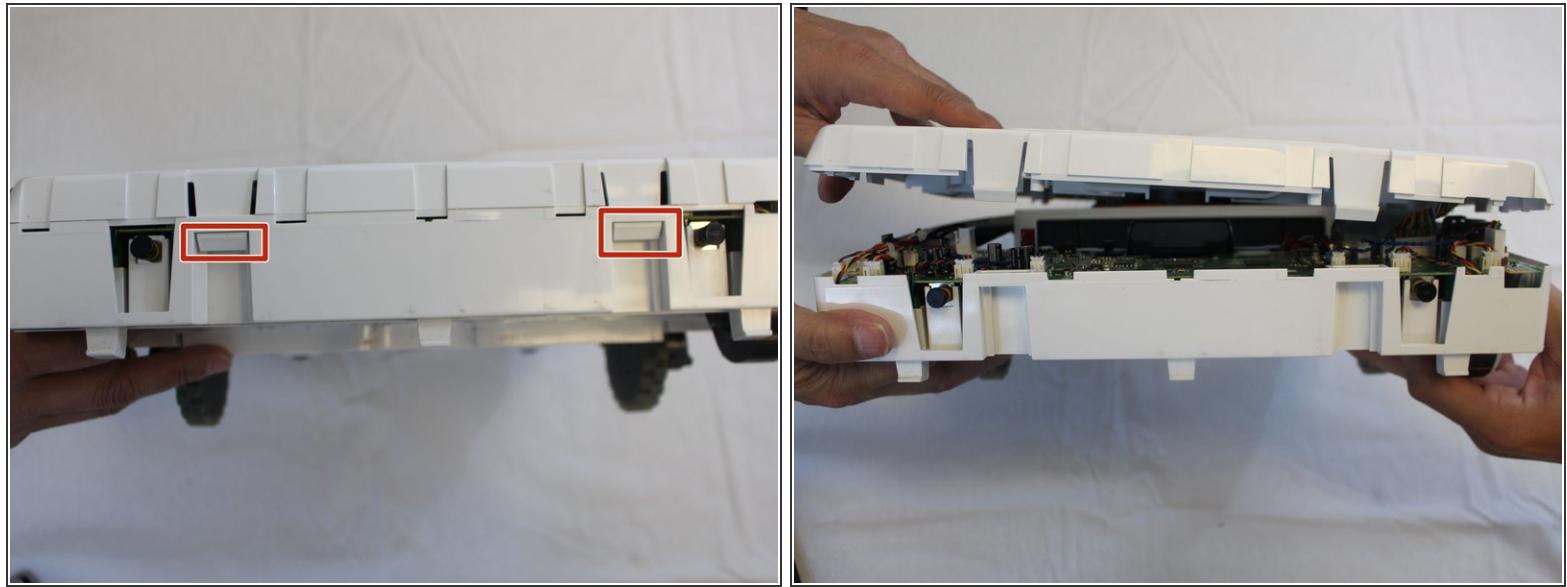


- On the back of the Botvac there are two retaining tabs that must be pressed to be released.
- With the tabs released the top and bottom cover halves can be separated.

## Step 12




- Carefully lift the top cover of the Botvac. On the right side of the Botvac is where you'll find the LCD screen connector to the motherboard. Carefully pull on the connector to disconnect it from the motherboard.

## Step 13

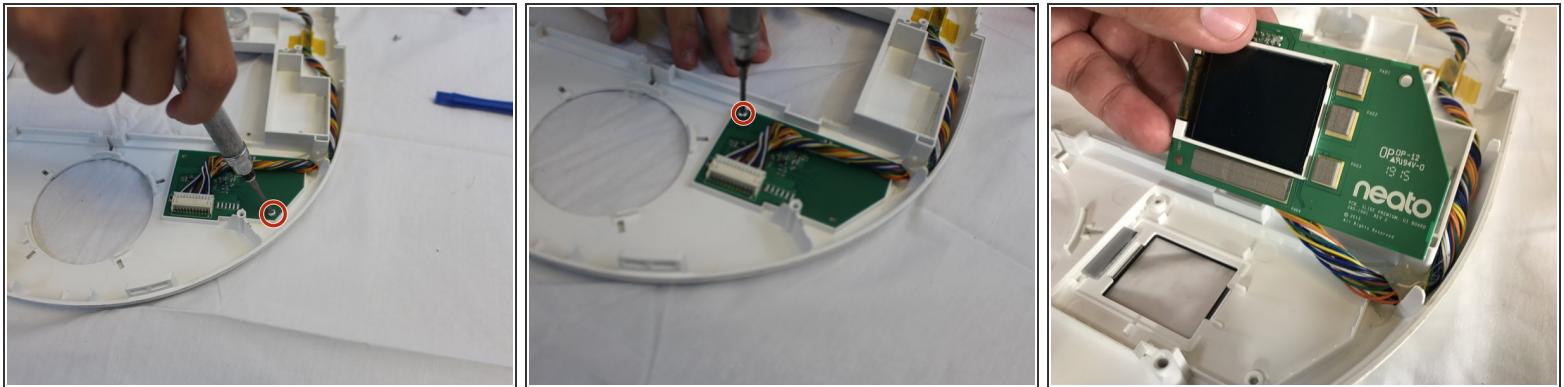

- There are two 0.5cm #1 Phillips screws holding the LCD screen to the top cover. Remove these screws to lift screen off the cover.

## Step 14

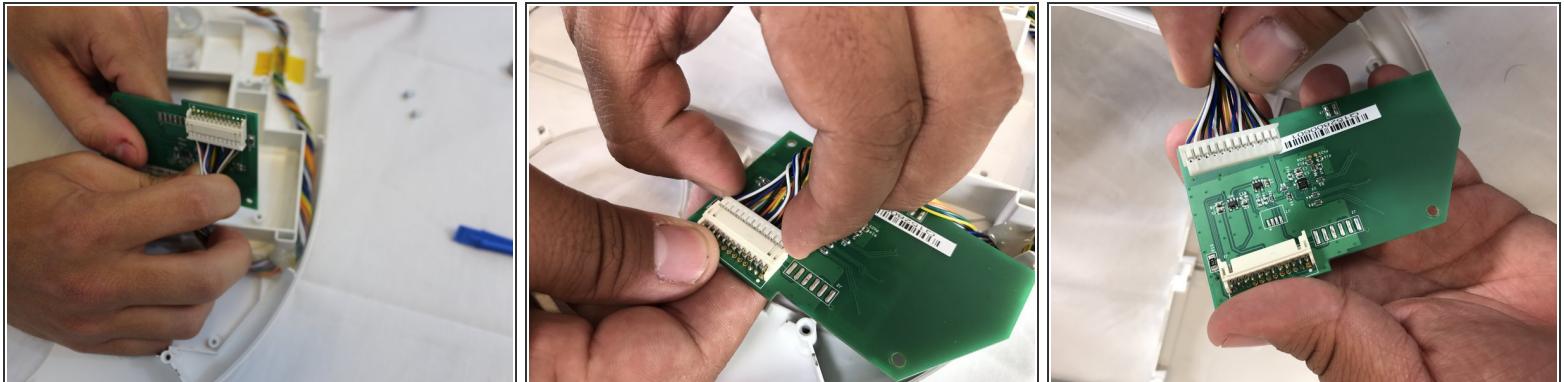

- With the two screws removed you may lift the screen off the cover. Carefully remove the connector from the screen by pulling on the connector.

To reassemble your device, follow these instructions in reverse order.