



Nerf Recon CS-6 Barrel Replacement

This guide shows how to replace the barrel of the gun.

Written By: Pam Ruffner



INTRODUCTION

The Barrel is the part of the gun that the dart exits. If it is badly cracked or clogged with dirt, it may block the dart from leaving. By using this guide, the barrel can be accessed for cleaning or replacement.

TOOLS:

- Phillips #0 Screwdriver (1)

Step 1 — Remove Magazine



- ⓘ Skip this step if magazine is already removed.
- Pull slide back.
- Pull backwards on release buttons and slide magazine out.
- Push slide back forward and pull trigger.

Step 2 — Remove Visible Screws



- Use the Phillips #0 Screwdriver to remove these 9 screws.
- All screws marked in red are 9.6 mm Phillips #0 screws.
- Note that left most screw is longer than the rest and is a 18.6 mm Phillips #0 screw.

Step 3 — Remove Hidden Screws



- Pull slide back to reveal more screws.
- Remove these 2 screws.
- Push slide forward.
- Pull trigger to release compression of the main spring.
- Screws are 9.6 mm Phillips #0.

(i) Pulling the trigger will keep spring from launching out of the gun when the two halves are separated.

Step 4 — Remove Plunger Cap



- Remove the screws on the plunger cap.
- Tug the plunger cap off.
- Screws are 9.6 mm Phillips #0.


Step 5 — Remove Slide Screws



- Remove the 2 screws on the slide.
- Screws are 9.6 mm Phillips #0.

Hold the two halves of the gun together to prevent any springs from launching out.

Step 6 — Split the Gun in Half

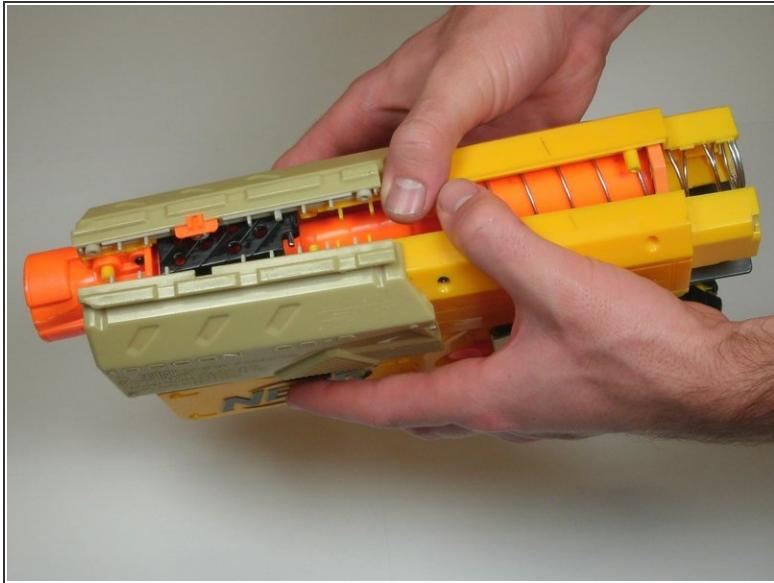

- Pull the gun apart at the middle seam.

⚠ Watch for any springs that might launch out.

Step 7 — Remove Spring



- Pull the spring out the back of the gun.

Step 8 — Removing Plunger Guide



- Lift the plunger guide straight up out of the gun.

Step 9 — Remove Plunger



- Pull the plunger out the back of the gun off of the inner piece.

Step 10 — Remove Other Half of Plunger



- Pull the remaining half of the plunger out the back of the gun.

To reassemble your device, follow these instructions in reverse order.