



# Nerf Vortex Praxis Trigger Replacement

This guide will show the complete removal of the trigger assembly.

Written By: Diego medina



## INTRODUCTION

If any part of the trigger assembly breaks, this guide will show how to remove any problematic areas. A screwdriver with a long shaft will be needed to get to all of the screws. Also watch out for any small parts that may come apart and fall out as you're working on the device.

### TOOLS:

- [Phillips #00 Screwdriver](#) (1)

## Step 1 — Trigger



- Start by taking out all of the screws for the casing of the gun. Using the PH #00 screwdriver, unscrew all four 1.3-cm screws in the pump.

## Step 2



- Take out all of the screws with a Phillips screwdriver. Using a PH #00 Screwdriver, unscrew all fourteen, 1.2 cm screws.

## Step 3



- Remove the small stock at the back end of the gun by removing two, 1 cm screws.

## Step 4




- Pull apart the case of the gun by pulling up.

## Step 5



- Remove the trigger components by removing these two, 1.2 cm screws.

## Step 6

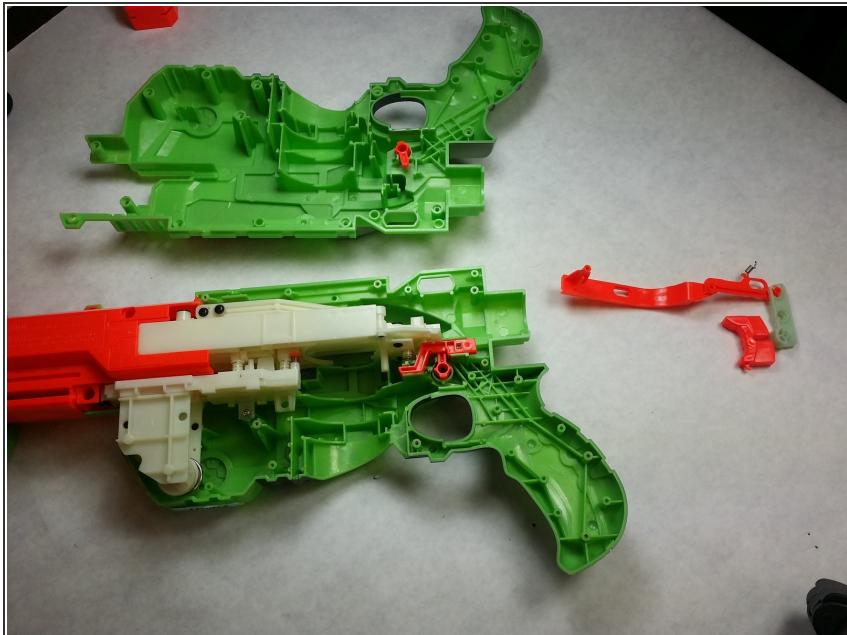

- Pick up the pieces to the trigger assembly for replacement.

To reassemble your device, follow these instructions in reverse order.